



TUNTEX

## Space Cloud

T707 Space Cloud draws inspiration from the free and fluid nature of clouds in the sky. Its dynamic graphic design and vibrant colors create an energetic and lively indoor atmosphere.



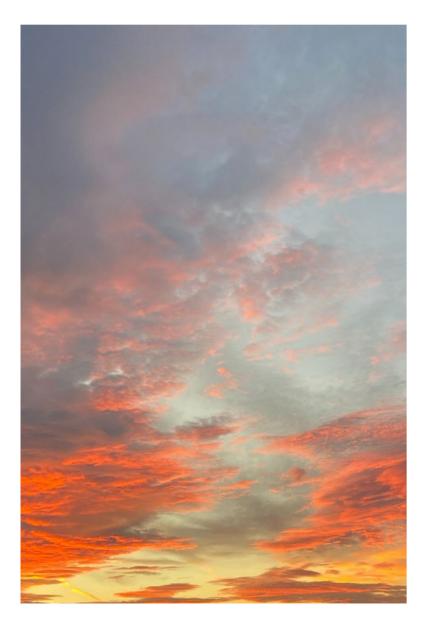

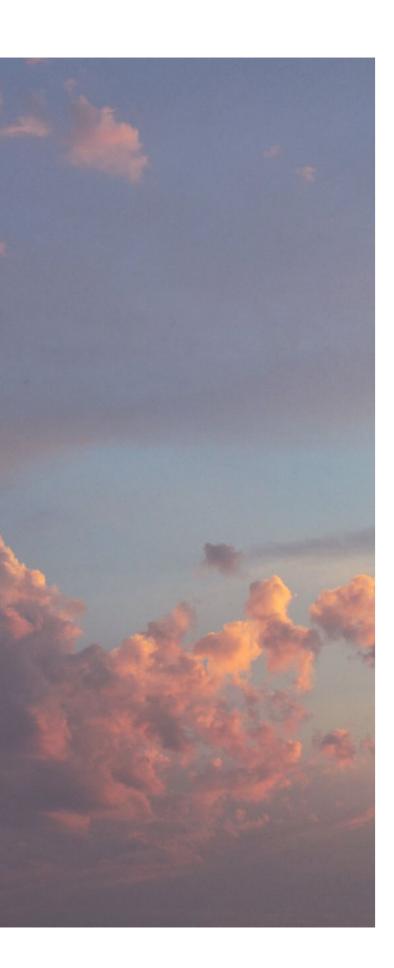







T7071 Quarter-Turn

T7074 Quarter-Turn











T7072 Tornado

T7073 Jupiter

T7074 Lime Halo

T7075 Mars

T7077 Aurora







Style

Gauge

**Pile Height Total Thickness** 

Construction Pile Fibre Dye Method

Wear Warranty

Anti-microbial

**Colour Fastness** Static Electricity

**Dimensional Stability** 

Installation

Sustainability

Health Product Declaration U.S. CRI Green Label Plu

Singapore Green Building

Passes ASTM Flammabilit Flammability: Passes (ASTM Smoke Density: Passes (AS

Passes AATCC Static Pro Static Propensity: ≤ 2.0 K

Passes the Quality Test of

Passes the Flammability the China National Fire an

ISO 9001 Quality Manage

ISO 14001 Environmenta

ISO 45001 Healthy & Safety Management System.



	T707 "Space Cloud"
	Multi Hi / Lo Loop
	nexlon <sup>™</sup> Premium Solution Dyed Nylon
	Solution Dyed
	1/10 G
	5.0 - 3.0 mm
	8.7 mm(±0.5mm)
	500mm x 500mm
	Approx. 6250 g/m <sup>2</sup>
	TUNTEX Duraback
	Stainshield Treatment: STAINSHIELD"
	Soil Guard Treatment: SOILGUARD"
	Ecofresh Treatment: ECOFRESH"
	Microshield Treatment: MICROSHIELD"
	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
	Permanent Lifetime Protection - less than 2.0 KV.
	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
	Tackifier or Releasable adhesive Recommended.
	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.
on (HPD).	
is Certificate.	
g Council Product Certificate - 4 Ticks "Leader".	
<b>ity Test.</b> M E648) STM E662)	
ppensity Test. V (AATCC 134)	
of China National Carpet Quality Test Center.	
Test and Environmental Protection Test of nd Construction Quality Surveillance Center.	
ement System.	
Il Management System.	

