MILANO T103

TUNTEX"

MILANO

Milano is a knitting technique commonly used in fabric and clothing. The Milano technique utilizes two sets of yarn knitted diagonally to create a smooth look on the face, achieving a superior performance in elasticity and resistance.










Warmness

Milano is a knitting technique commonly used in fabric and clothing. The Milano technique utilizes two sets of yarn knitted diagonally to create a smooth look on the face, achieving a superior performance in elasticity and resistance.





Texture

With the intention to highlight the friendly and cozy feeling of clothing in carpet design, Tuntex new collection T103 Milano comes with a timeless design but offers a wide range of natural shades just like Milano knit fabrics. More importantly, it utilizes Tuntex latest invention – aircell, a technology able to achieve greater volume and bulkiness in texture than ever before, further emphasizing the beauty of Milano fabric.

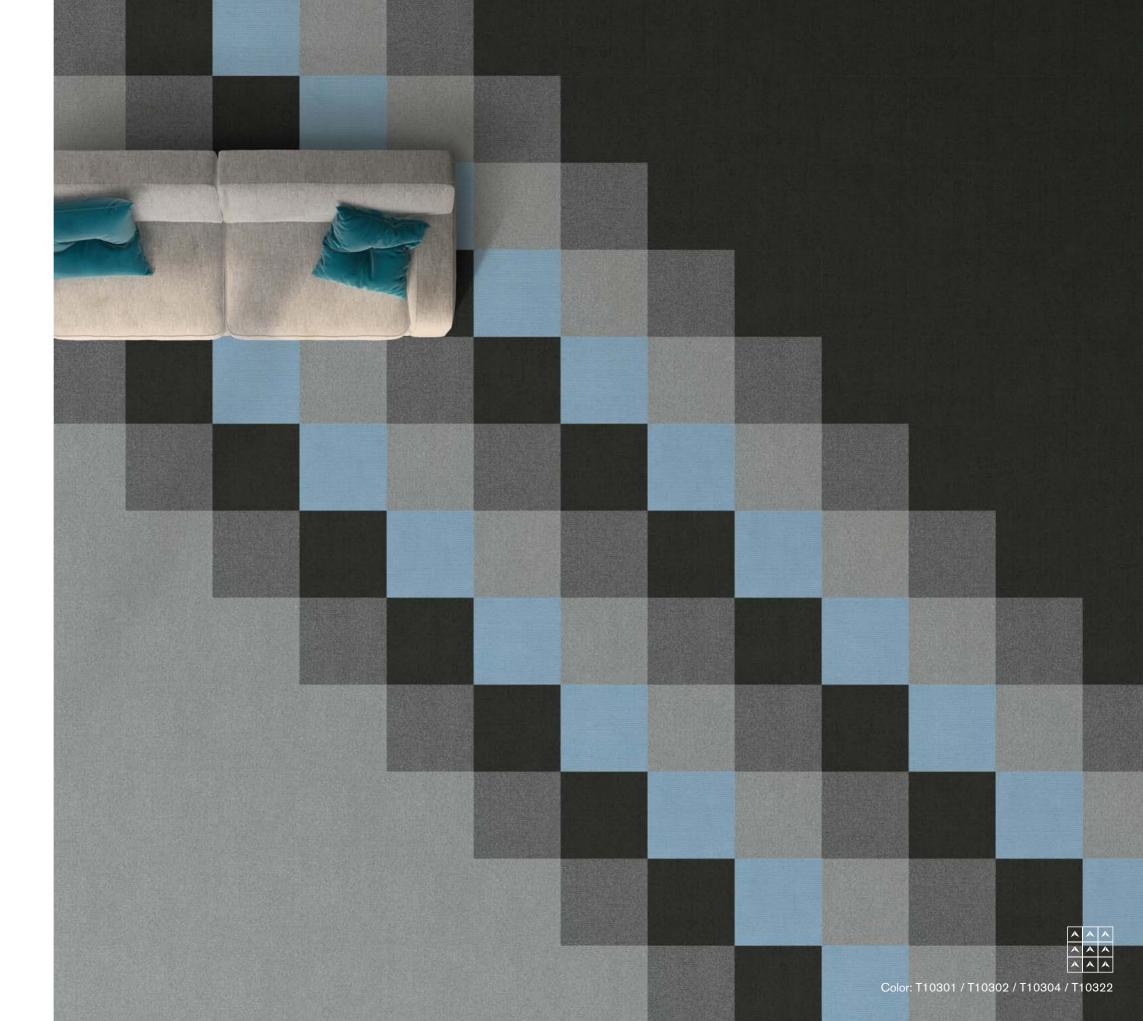




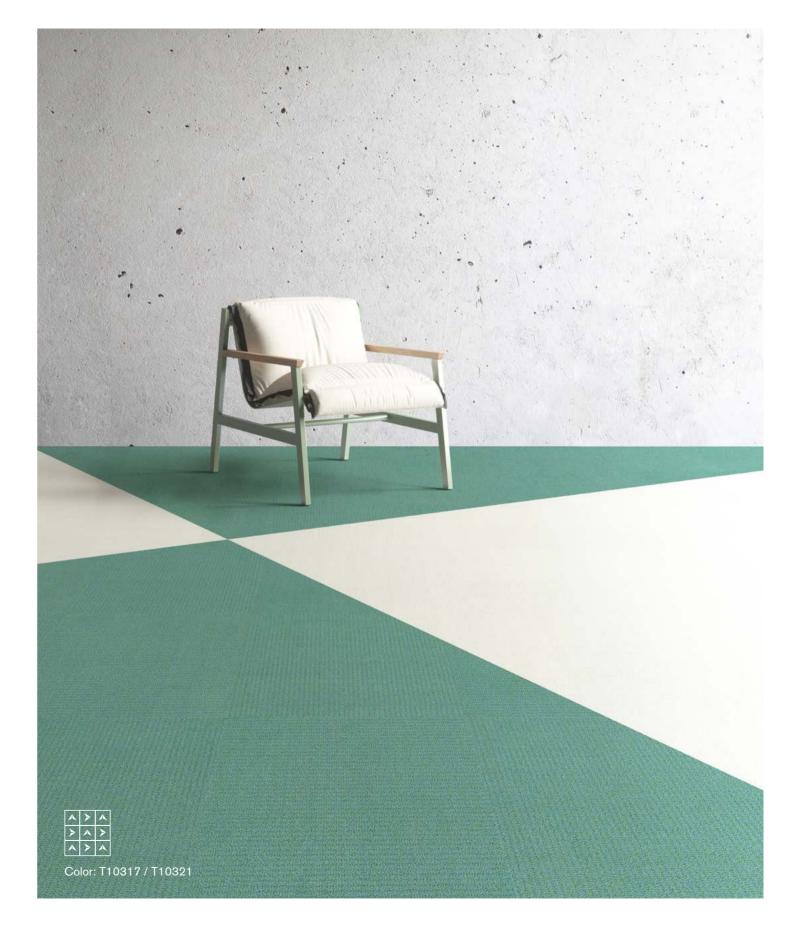

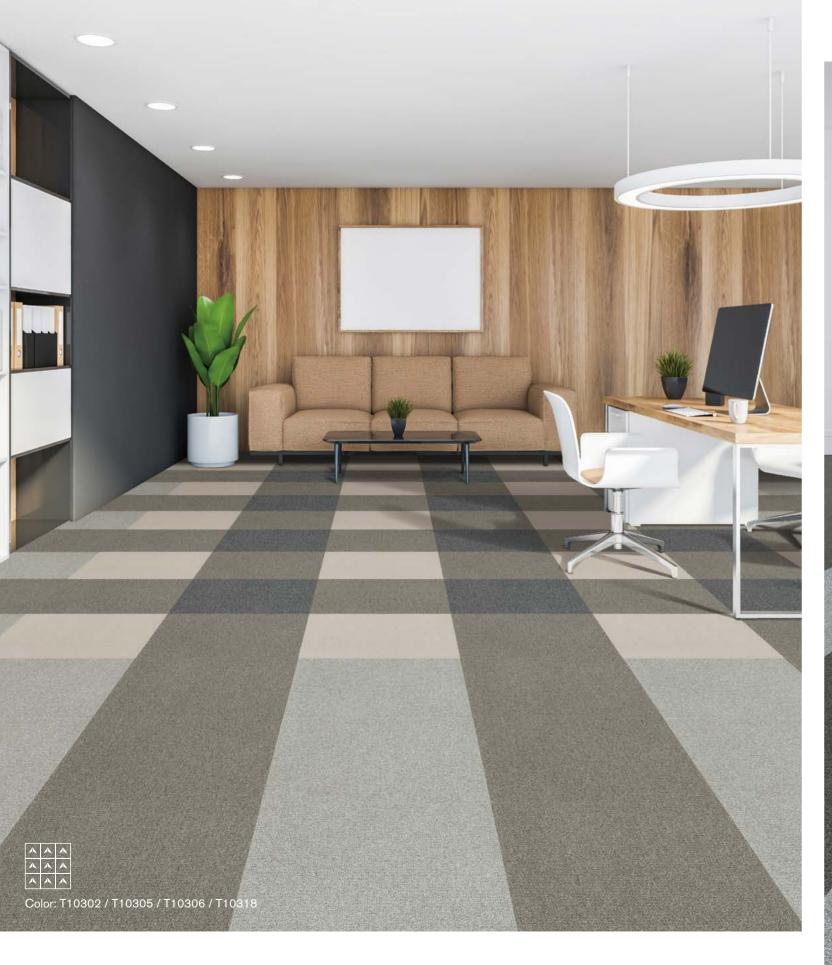



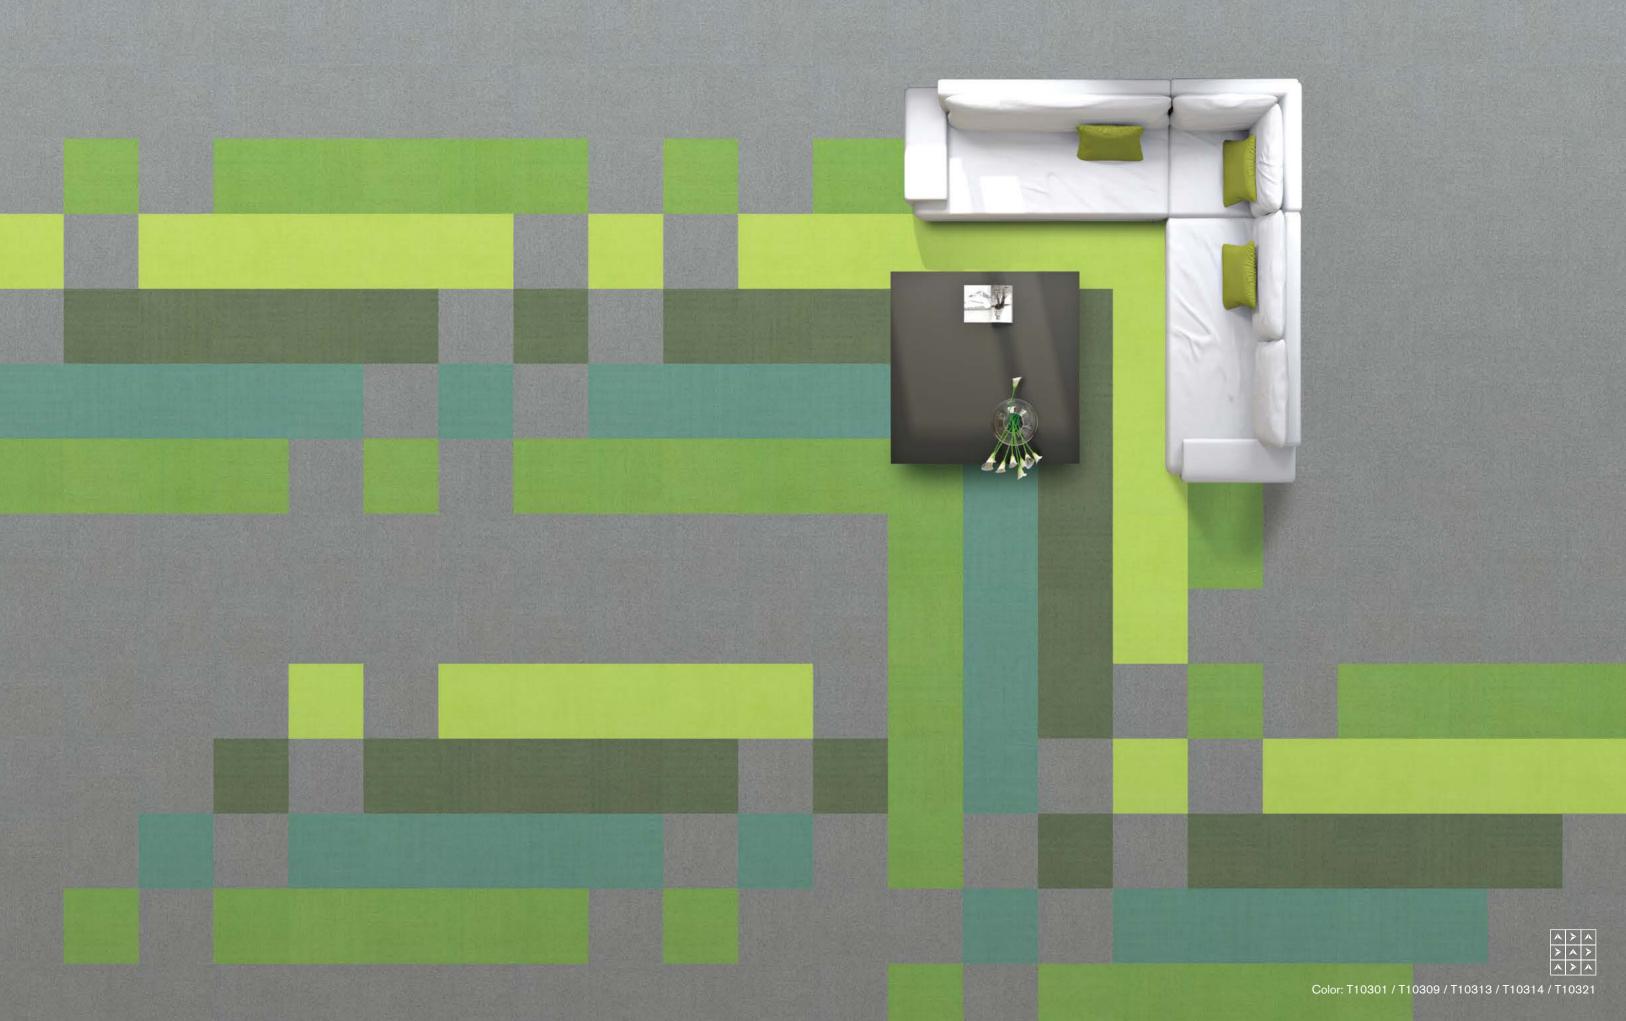









T10301 Cloud

T10302 Fossil

T10303 Shadow

T10304 Charcoal

T10305 Pewter

T10306 Wood

T10307 Peanut



T10309 Lime

T10310 Daffodil

T10311 Carrot

T10312 Red

T10313 Pear

T10314 Pine

T10315 Cerulean





T10317 Sugar Cookie

T10318 Oat

T10319 Cedar

T10320 Beige

T10321 Fern

T10322 Sky





Style

Gauge

nexlon[™] Prisma + Aircell Premium Solution Dyed Nylon with Pile Fibre

Stain & Soil Resist Technology

T103 "Milano"

1 / 12G

Multi Hi / Lo Loop

Dye Method Solution Dyed

6.0 - 3.5mm Pile Height

Total Thickness 7.2mm(±0.5mm)

500mm x 500mm Tile size **Total Weight** Approx. 4950g / m²

Recyclable TUNTEX Commercial Duraback Secondary Back

Wear Warranty Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

Static Electricity Permanent Lifetime Protection - less than 2.0 KV.

Stain Resistance Stainshield Treatment: STAINSHIELD"

Soil Resistance Soil Guard Treatment: SOILGUARD™

Dimensional Stability Warranted not to change in size by more than 0.5 mm in

normal use. Will not dome or dish in normal use.

Installation Tackifier or Releasable adhesive Recommended.

Sustainability All yarns used are Solution dyed to minimise use of water

and exclude any effluent production.

ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test. Static Propensity: ≤3.5 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

Passes EN 13501 European Fire Test Bfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.





















T10308 Walnut T10316 Navy

