

Criss-cross


T617 Criss-cross incorporates a net pattern, flax texture, and a thick weight to create a unique and striking visual appeal.










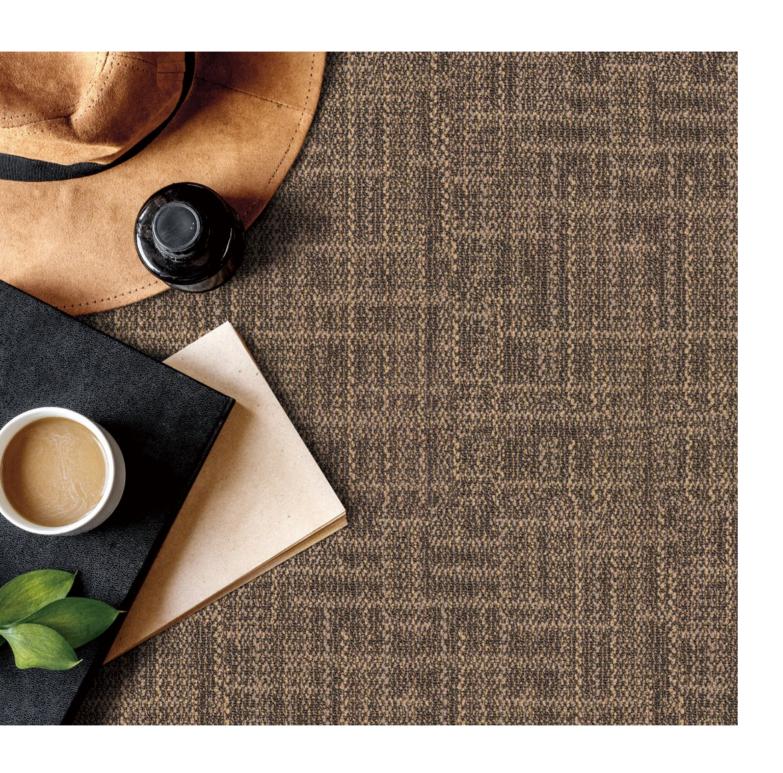

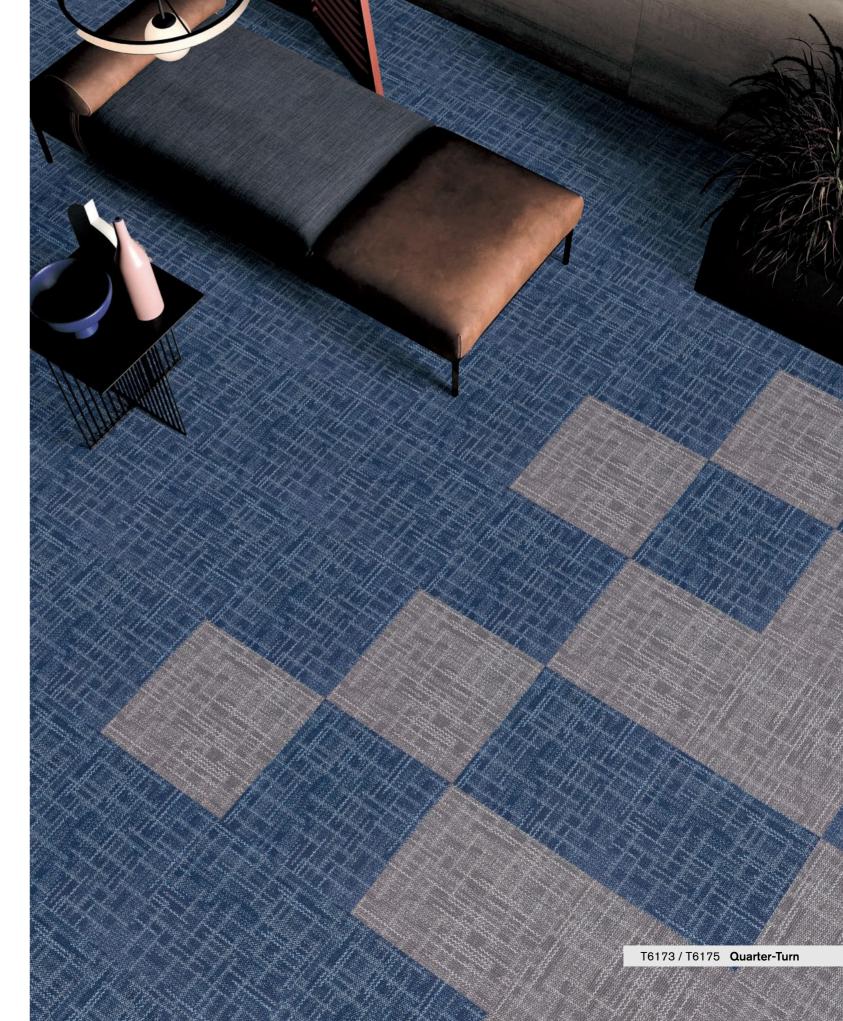





T6171 Peanut



T6172 Cedar



T6173 Fossil



T6174 Anchor



T6175 Spruce



T6176 Syrup

Style T617 "Criss-cross" Hi / Mid / Lo Loop Construction

nexlon[™] Premium Solution Dyed Nylon Pile Fibre

Dve Method Solution Dyed

Gauge 1 / 12G

Stain Resistance

6.0 / 4.5 / 3.0mm Pile Height 7.7mm(± 0.5 mm) **Total Thickness**

Tile size 500mm x 500mm

Total Weight Approx. 5250g / m²

Secondary Back TUNTEX Duraback

Soil Guard Treatment: SOILGUARD™ Soil Resistance

Product is warranted not to lose more than 10% pile fibre by **Wear Warranty** weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

Static Electricity Permanent Lifetime Protection - less than 2.0 KV.

Dimensional Stability Warranted not to change in size by more than 0.5 mm in normal

use. Will not dome or dish in normal use.

Stainshield Treatment: STAINSHIELD**

Installation Tackifier or Releasable adhesive Recommended.

All yarns used are Solution dyed to minimise use of water and exclude any effluent production. Sustainability

ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified

by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test. Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

















