





T62901




T62902




T62906




T62903




T62907




T62904




T62908



T62905



T62909



T62910

Style	T629 "Spectrum"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon with Stain & Soil Resist Technology
Dye Method	Solution Dyed
Gauge	1 / 12 G
Pile Height	5.0 / 4.0 / 2.5 mm
Total Thickness	7.3 mm (±0.5 mm)
Tile size	500 mm x 500 mm
Total Weight	Approx. 4900 g/m²
Secondary Back	Recyclable TUNTEX Commercial Duraback

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16, Grade 4 – Little or no change.
Static Electricity	Permanent Lifetime Protection – less than 2.0 KV.
Stain Resistance	Stainshield Treatment: STAINSHIELD™
Soil Resistance	Soil Guard Treatment: SOILGUARD™
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.

Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.

Static Propensity: ≤3.5 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO9001 Quality Management System.

ISO14001 Environmental Management System.


Passes EN 13501 European Fire Test Bfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.




TUNTEX™

All images are computer generated files and may not exactly represent actual installation appearance and tile seams. Full tiles can be provided if required.



Color: T62901/T62902

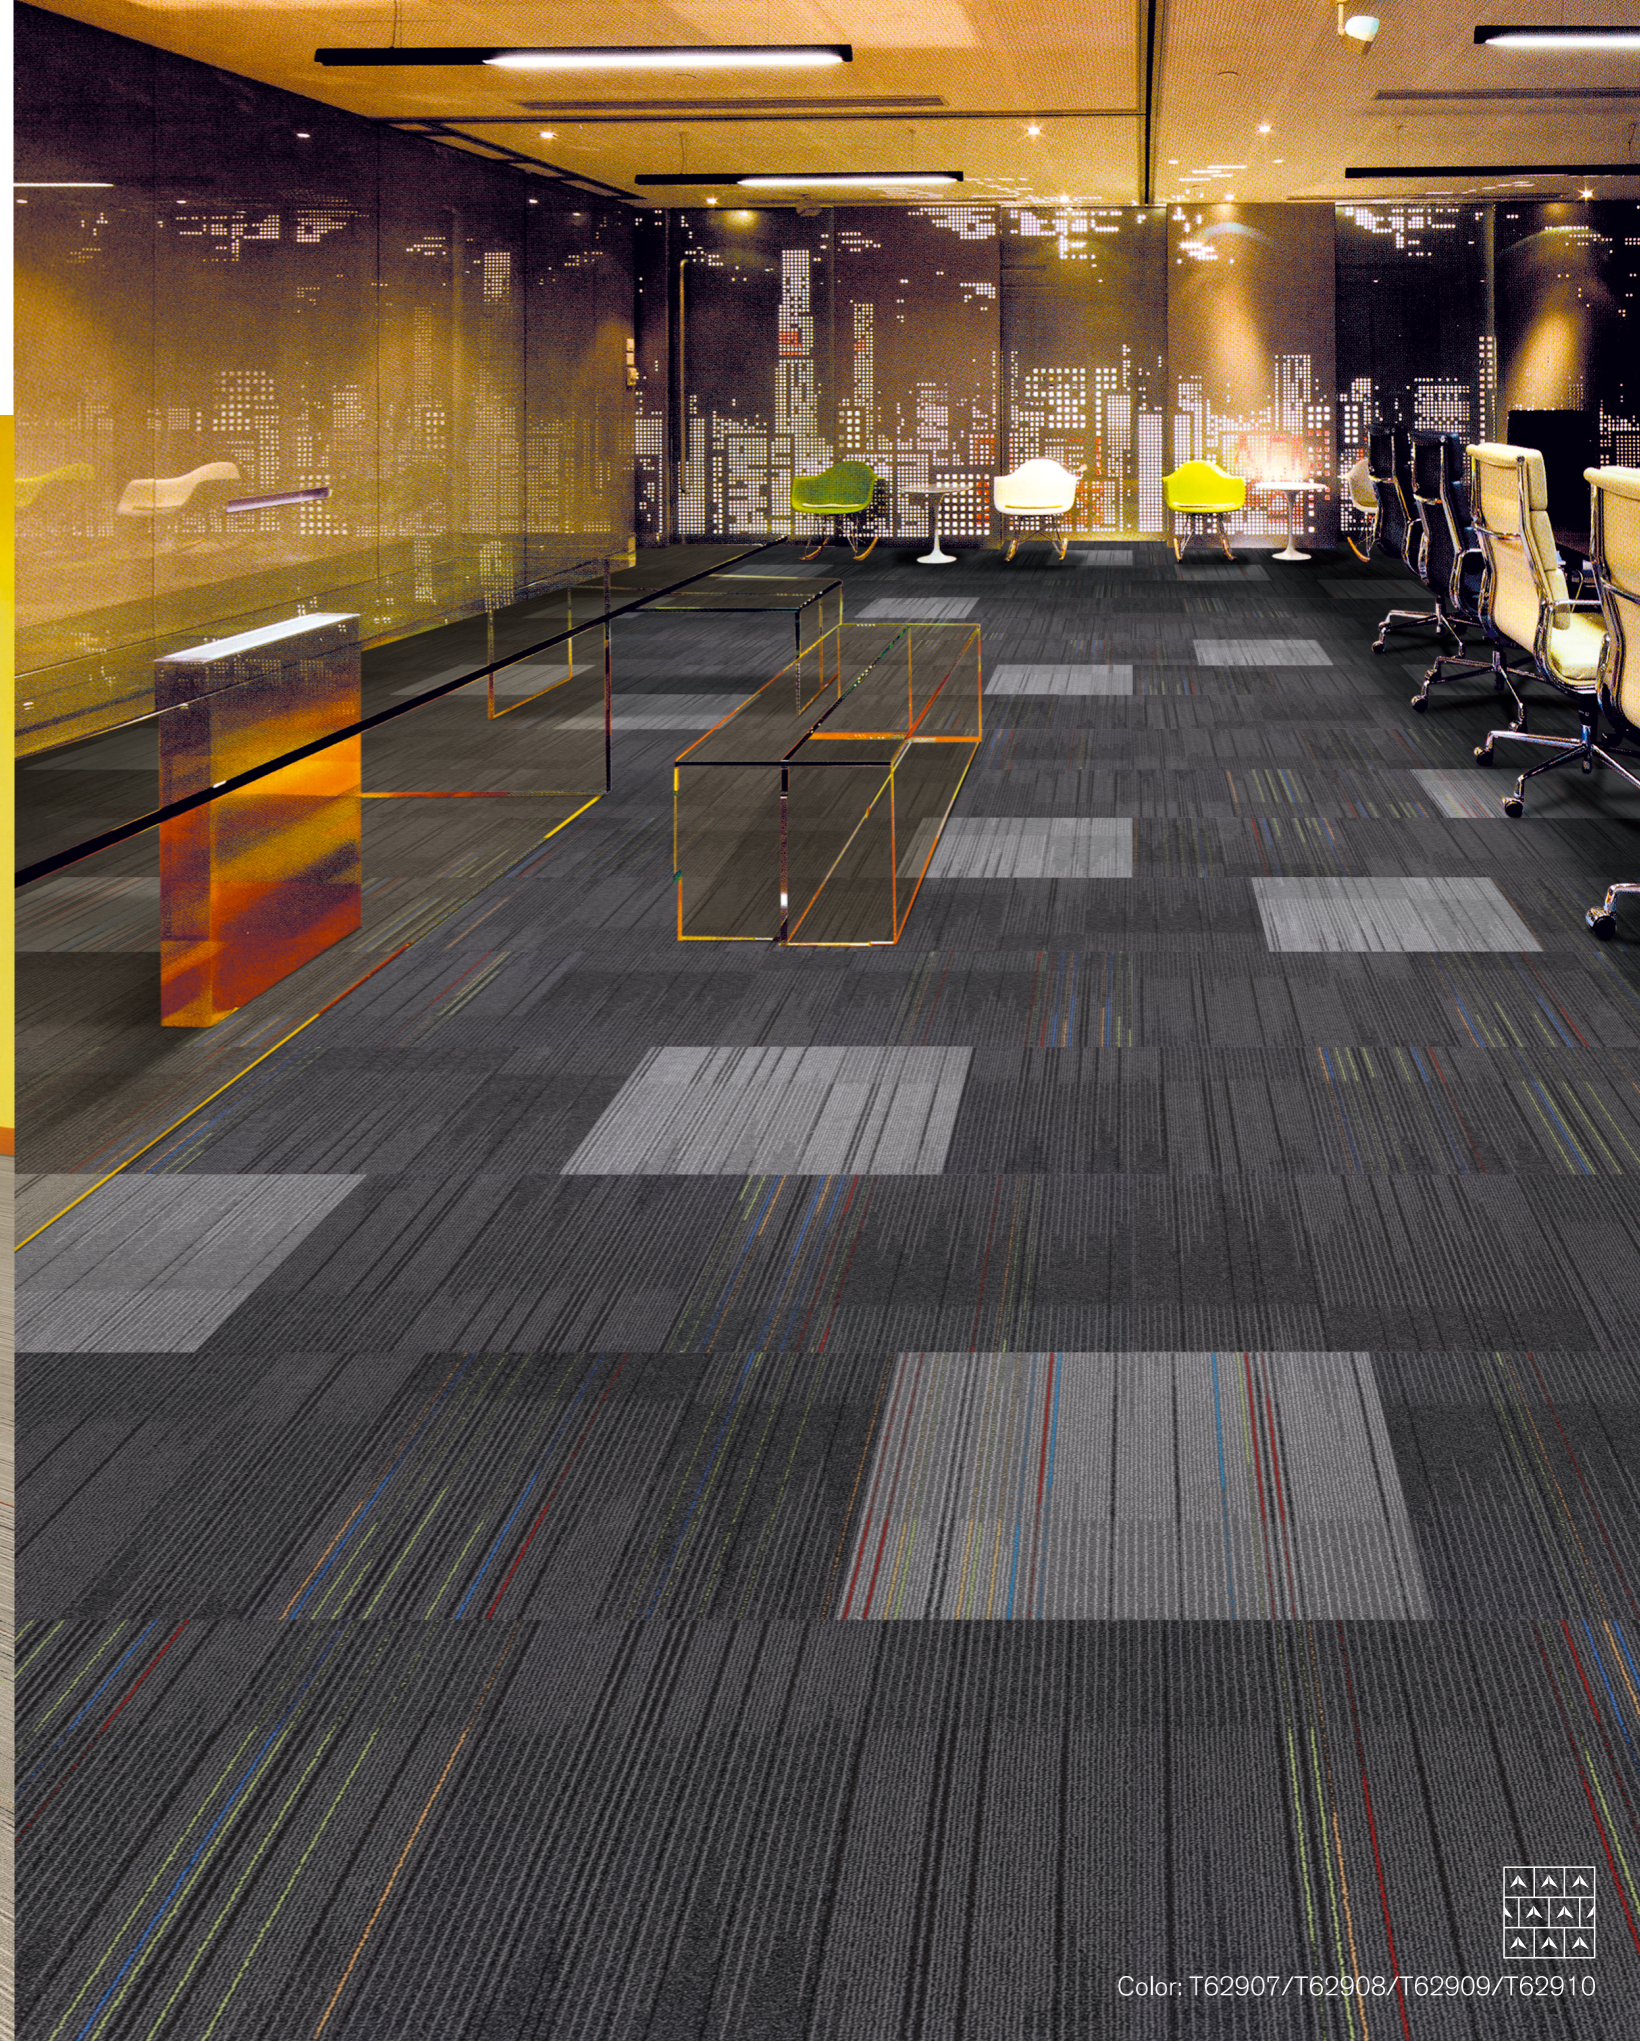

Color: T62907/T62908/T62909/T62910

FASHION BOOK



Color: T62903/T62904



Color: T62907/T60908



Color: T62905/T62906



Color: T62905/T62906