




SHADOW

T670

TUNTEX™

Shadow

As you pass the streetlight at night, you notice the shadow becoming gradually longer until it disappears. Shadow can create a sort of puppet show by changing the shape of your hand between the light. Shadows are everywhere, in real life, art, and architecture.

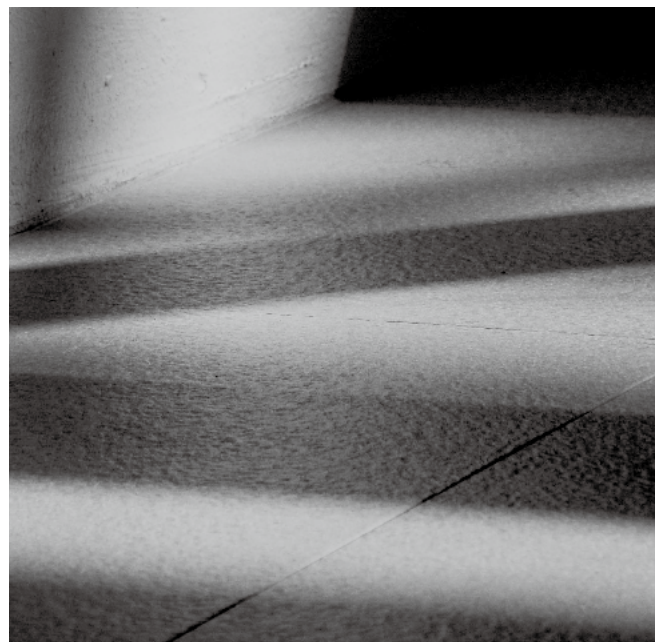


Color: T67002 / T67004



Color: T67003 / T67009

Fickleness

Shadows always change shape with movement and light. It is sometimes short and squat, or sometimes long and thin, depending on how the light moves away.

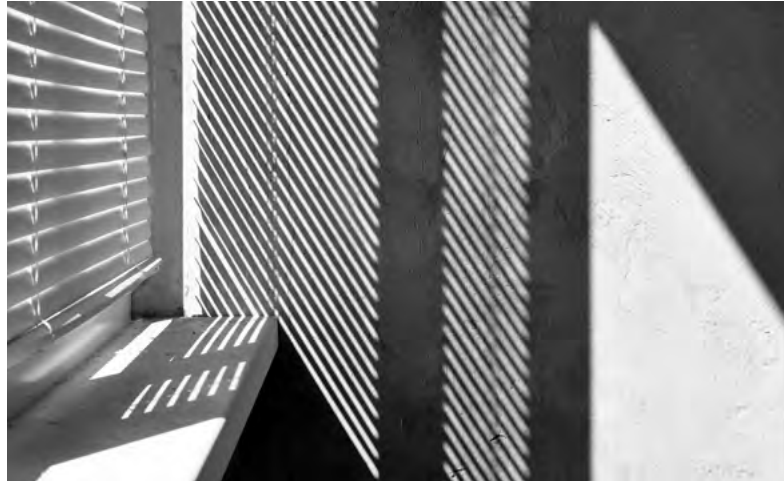



Dynamic

Inspired by shadows, T670 features simple texture through different combinations. The pattern can be different, depending on where you are in the room. T670 is available in 10 different colors, providing unpredictable possibilities to energize the space.






T670
product insight

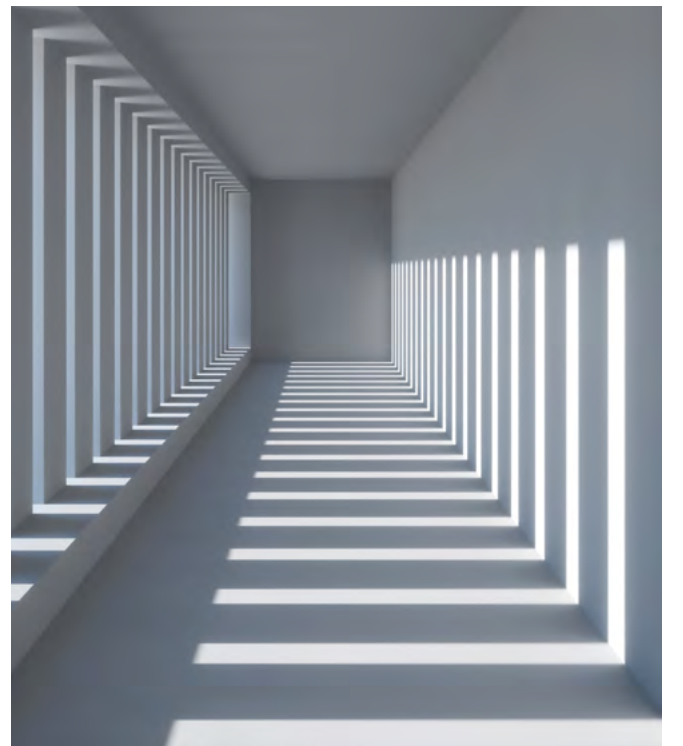

Color: T67001 / T67004

All images are computer generated files and may not exactly represent actual installation appearance and tile seams. Full tiles can be provided if required.

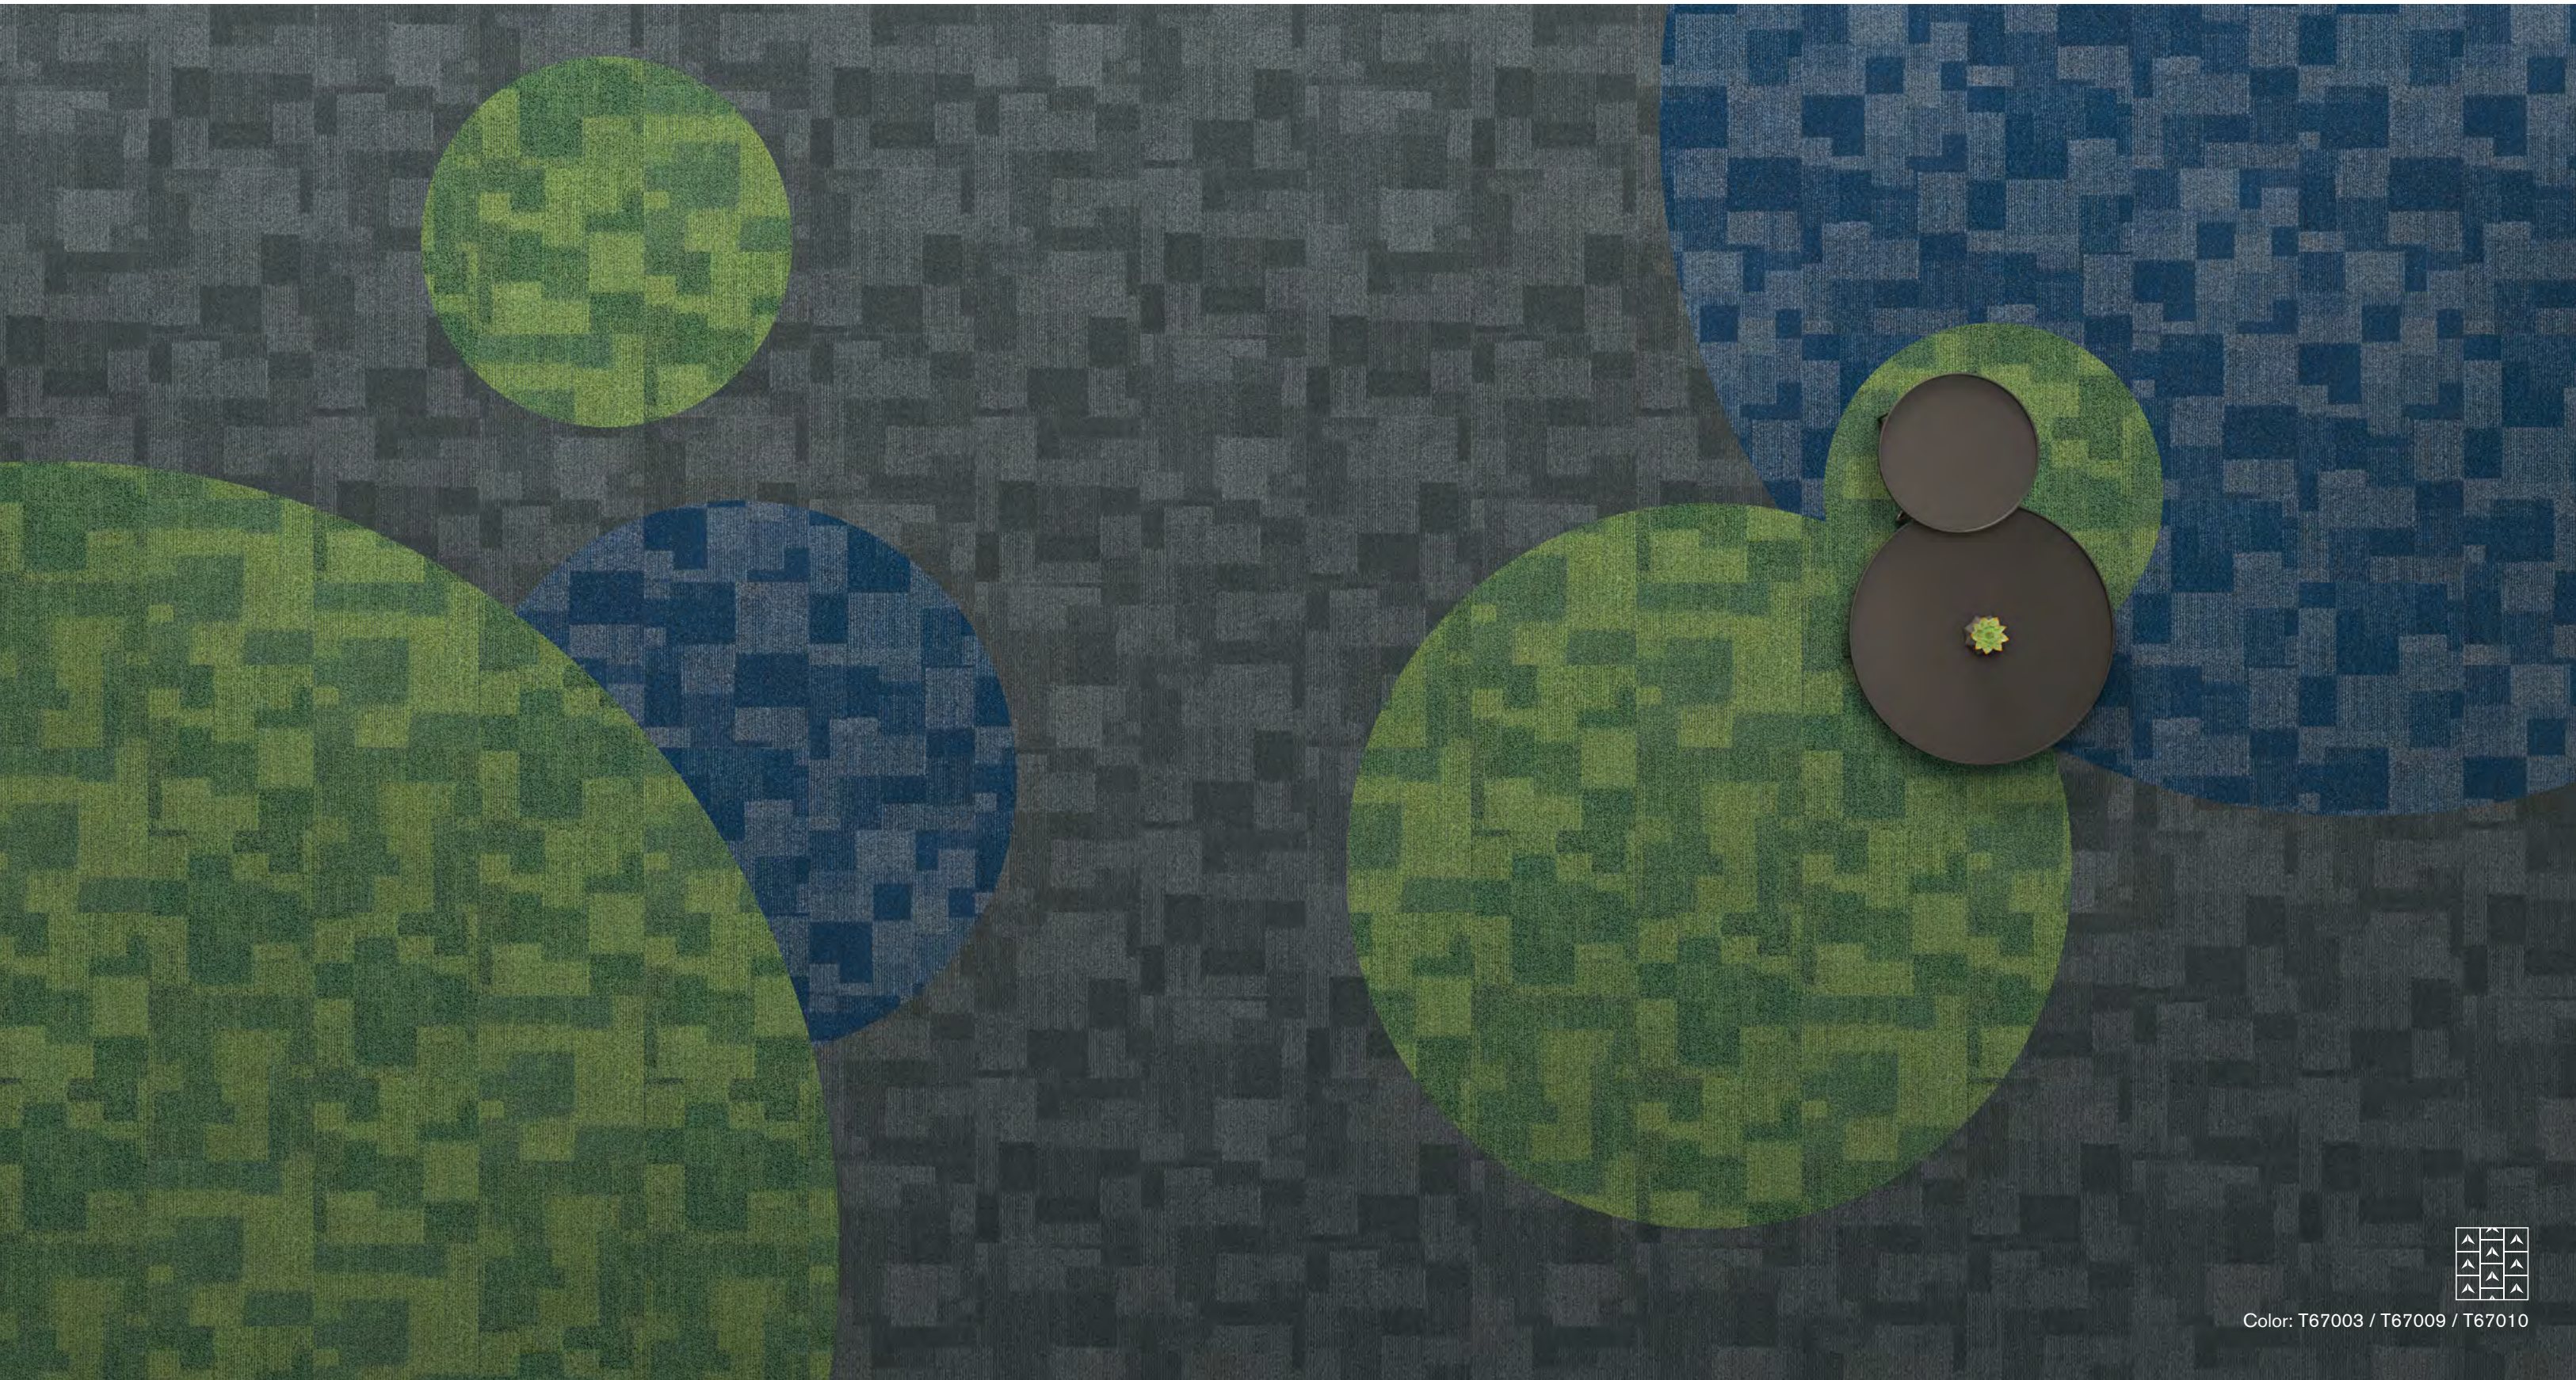



Color: T67003 / T67009 / T67010



Color: T67006 / T67007




Color: T67002 / T67005 / T67007

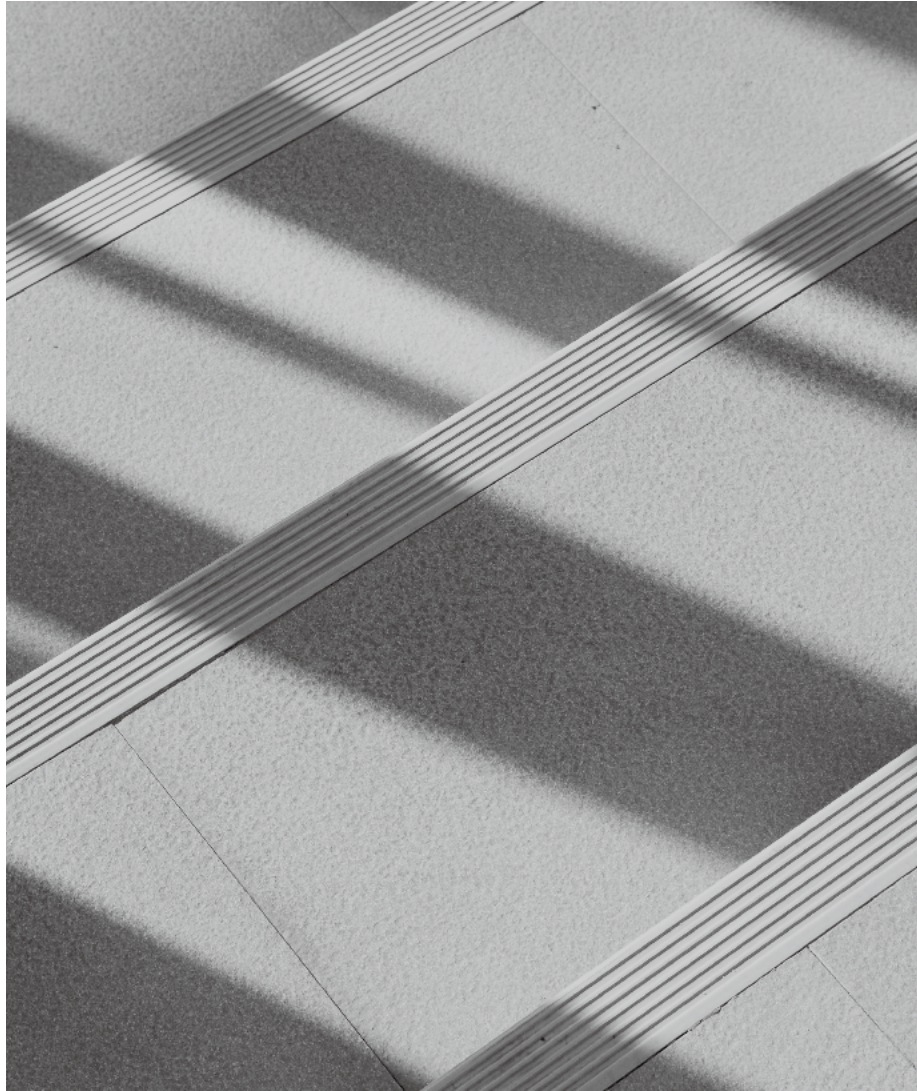

Color: T67002



Color: T67003 / T67006



T67001 Cloud




T67002 Coin



T67003 Fossil



T67006 Oat




T67004 Charcoal



T67007 Hazel Wood




T67005 Oyster



T67008 Fire



T67009 Shamrock



T67010 Sapphire

Style	T670 "Shadow"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Standard + Circular Premium Solution Dyed Nylon with RECYCLED content, Stain and Soil Resist technology
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.5 / 4.5 / 3.5mm
Total Thickness	7.5mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4900g / m ²
Secondary Back	Recyclable TUNTEX Commercial Duraback
Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Stain Resistance	Stainshield Treatment: STAINSHIELD™
Soil Resistance	Soil Guard Treatment: SOILGUARD™
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤3.5 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

Passes EN 13501 European Fire Test Bfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.



