



Pulse


T105




TUNTEX™

Pulse

T105 Pulse is designed to create a positive, open, and mutually inspiring interior atmosphere. Drawing inspiration from the rhythmic beating of a pulse, this concept infuses a unique rhythm into the space, promoting a welcoming and collaborative environment.

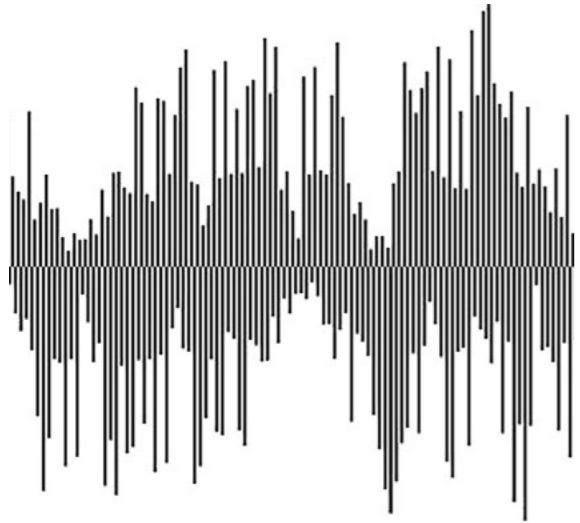

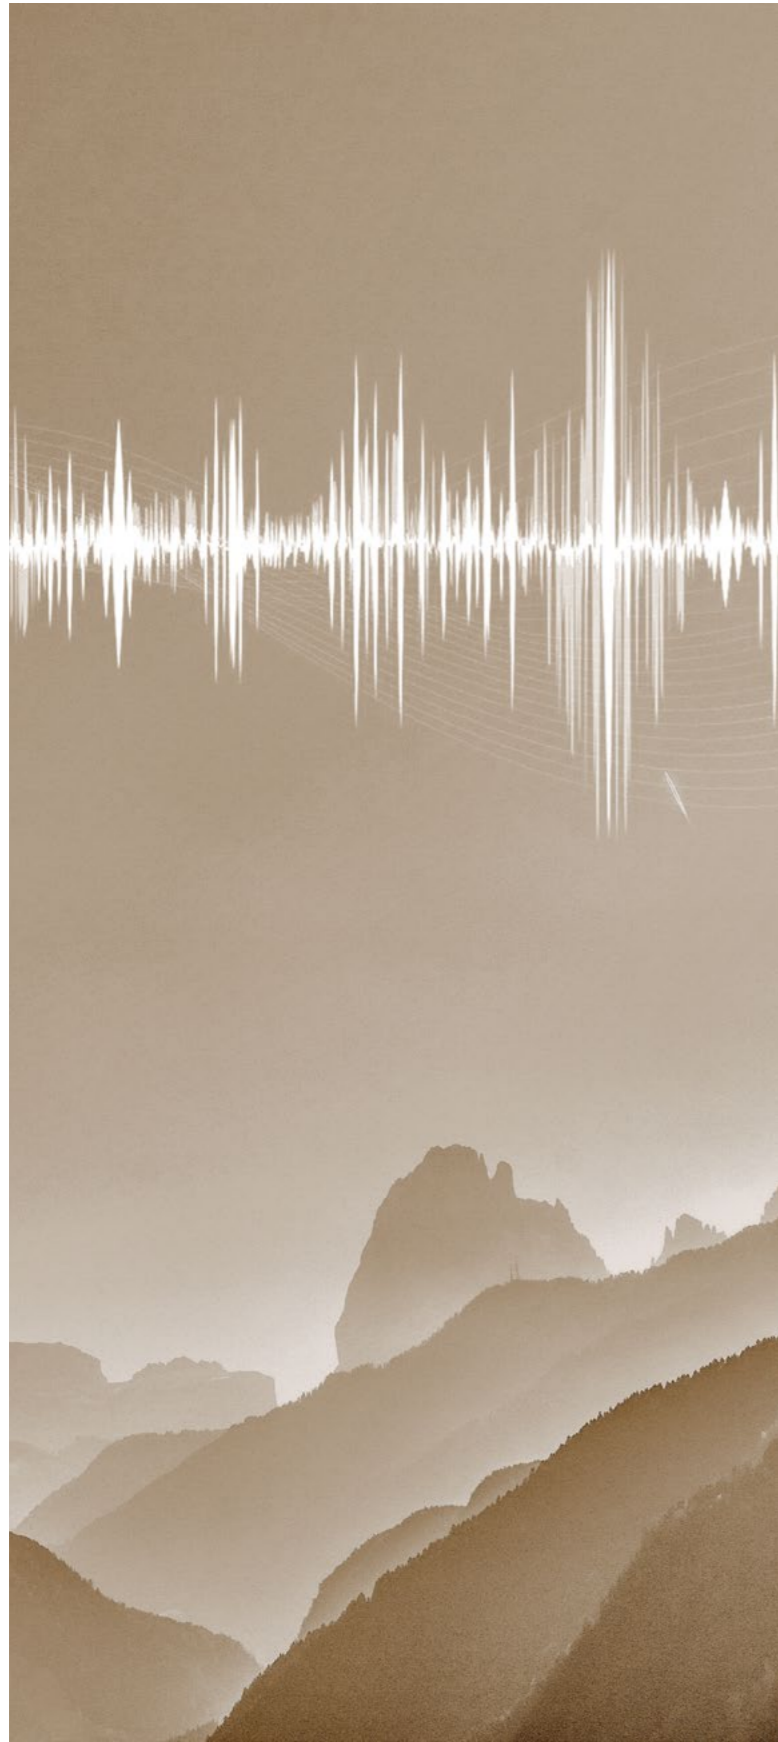




T10507 / T10513 Ashlar



T10516 Quarter-Turn

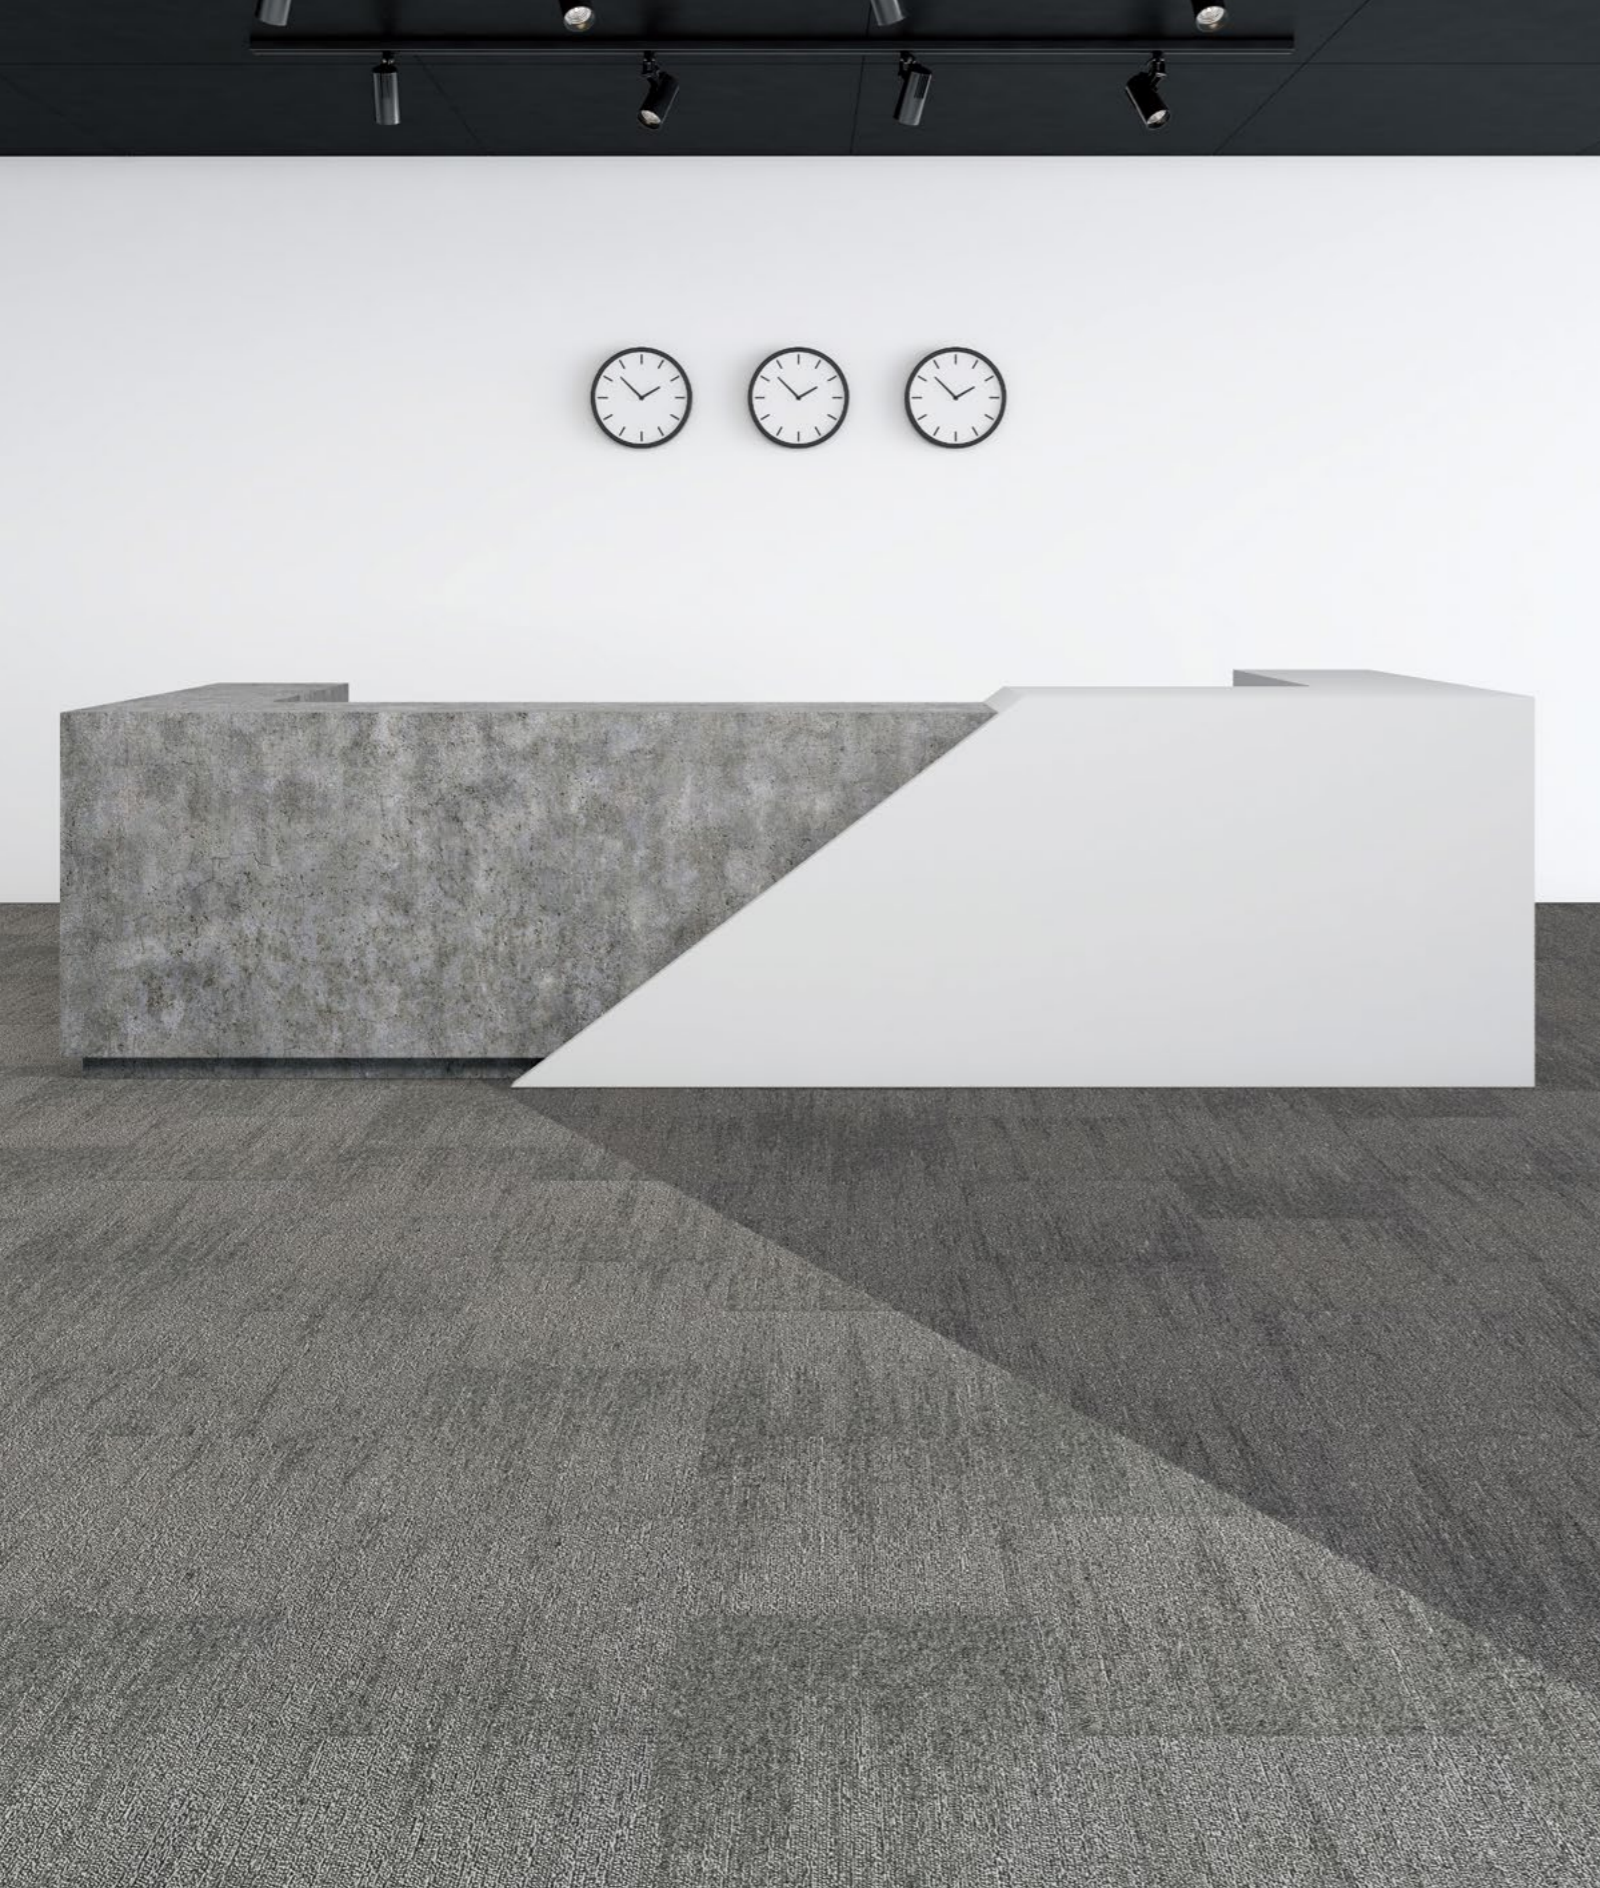

T10506 / T10507 Ashlar



T10506 / T10509 Ashlar



T10510 / T10511 Quarter-Turn




T10502 / T10505 Quarter-Turn






T10502 / T10512 Brick



T10501 Sand Castle



T10502 Hazel Wood




T10503 Fawn




T10504 Cider



T10505 Clay



T10516 Ash



T10517 Shadow




T10506 Silver



T10507 Pewter




T10508 Porpoise




T10509 Pebble



T10510 Lead




T10511 Rose




T10512 Fire



T10513 Shamrock



T10514 Sapphire



T10515 Admiral

Style	T105 "Pulse"
Construction	Multi Hi / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	4.5 - 3.5mm
Total Thickness	7.2mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4950g/m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



