





ReGenerate T108
ReGenerate Plus T108+

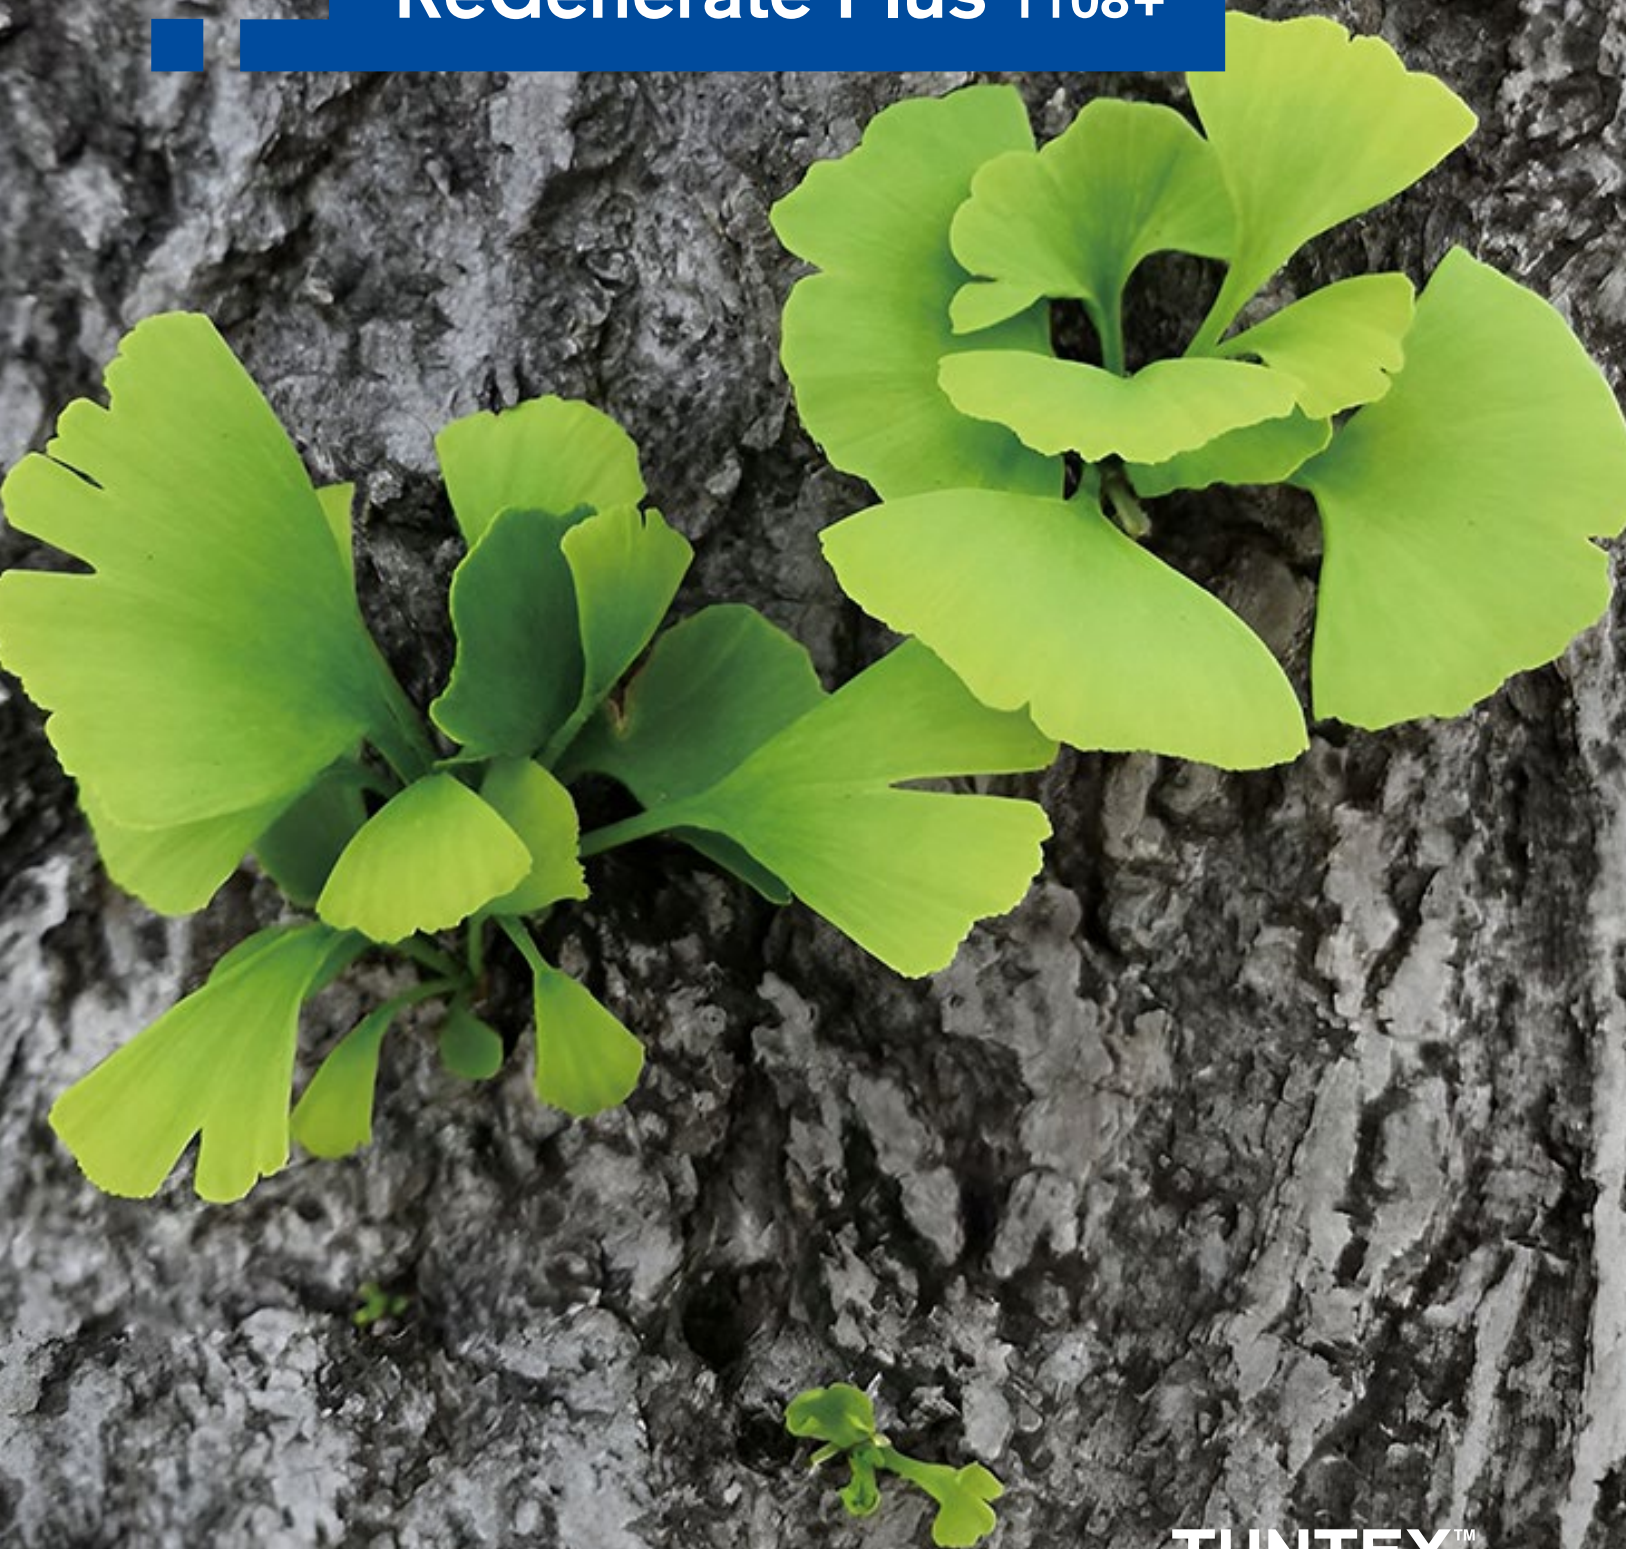

TUNTEX™

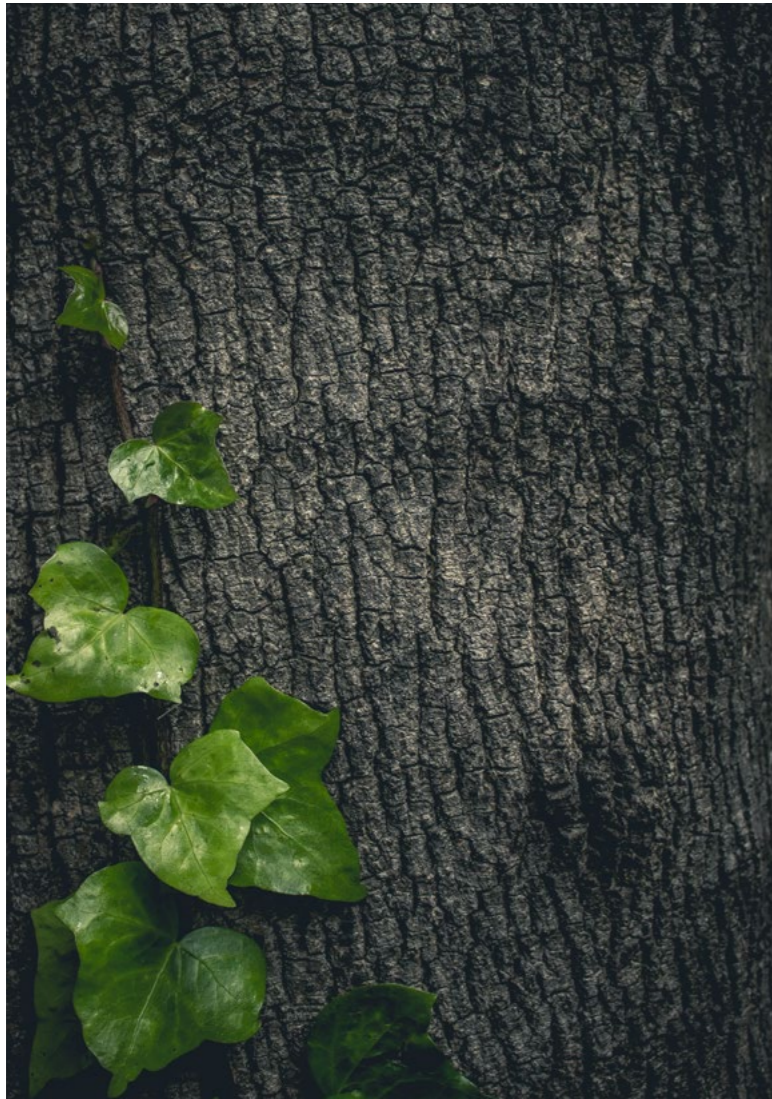

ReGenerate ReGenerate Plus

T108 ReGenerate produces a sleek and modern base atmosphere, whereas T108 ReGenerate+ includes a splash-shaped accent, providing an additional layer of dynamism to the overall layout.





T10826 / T10834 Brick



T10807 / T10823 / T10825 / T10837 Brick



T10806 / T10861 / T10863 Ashlar



T10861 / T10864 Ashlar





T10835 Brick



T10805 / T10822 Quarter-Turn


**T108
ReGenerate**



T10838 Yellow



T10826 Cloud



T10805 Smokey



T10829 Orange




T10834 Hazel Wood



T10806 Charcoal




T10821 Emerald



T10835 Iron



T10825 Silver



T10822 Ruby




T10817 Tawny



T10803 Ash



T10823 Denim



T10830 Porpoise




T10837 Aegean




T10807 Lead


**T108+
ReGenerate Plus**




T10851 Coin




T10853 Emerald




T10854 Cerulean



T10861 Silver



T10863 Aegean



T10864 Ruby



T10826 / T10834 / T10835 Ashlar

Style	T108 "ReGenerate" / T108+ "ReGenerate Plus"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon / nexlon™ Premium Solution Dyed Nylon featured with quartz
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.0 / 4.5 / 3.0mm
Total Thickness	7.7mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4900g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



