




**Torrent**  
T601

**TUNTEX™**



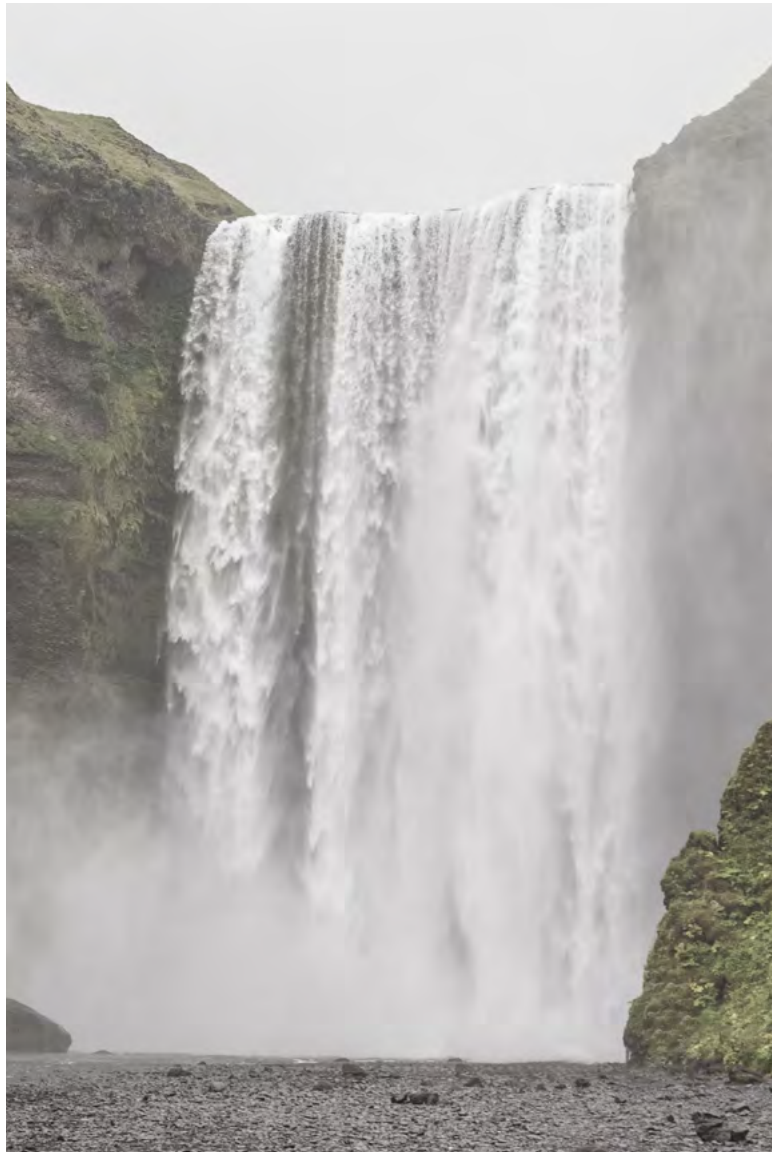

# Torrent

Torrent is a large water current flowing with great speed and violence. It rushes through rocks on the rugged mountain path, but with its power and mystery, creates an image of dynamism and continuity.











T60103 Ashlar



T60101 / T60105 Ashlar





T60102 / T60103 / T60107 **Brick**



T60105 / T60106 **Quarter-Turn**









T60104 / T60105 / T60106 Ashlar



T60105 / T60106 Ashlar





T60101 / T60102 / T60103 Ashlar



T60101 Cloud



T60107 Shadow



T60102 Slate



T60103 Pebble



T60104 Sand Dollar



T60105 Grey



T60106 Umber

|                         |  |
|-------------------------|--|
| <b>Style</b>            | T601 "Torrent"                             |
| <b>Construction</b>     | High Cut Low Loop                          |
| <b>Pile Fibre</b>       | nexlon™ Premium Solution Dyed Nylon        |
| <b>Dye Method</b>       | Solution Dyed                              |
| <b>Gauge</b>            | 1 / 10G                                    |
| <b>Pile Height</b>      | 8.0 / 5.0mm                                |
| <b>Total Thickness</b>  | 9.5mm(±0.5mm)                              |
| <b>Tile size</b>        | 500mm x 500mm                              |
| <b>Total Weight</b>     | Approx. 5300g / m <sup>2</sup>             |
| <b>Secondary Back</b>   | TUNTEX Duraback                            |
| <b>Stain Resistance</b> | Stainshield Treatment: <b>STAINSHIELD™</b> |
| <b>Soil Resistance</b>  | Soil Guard Treatment: <b>SOILGUARD™</b>    |

---

|                              |  |
|------------------------------|--|
| <b>Wear Warranty</b>         | Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.          |
| <b>Colour Fastness</b>       | 15 Year Warranty AATCC 16. Grade 4 - Little or no change.  |
| <b>Static Electricity</b>    | Permanent Lifetime Protection - less than 2.0 KV.  |
| <b>Dimensional Stability</b> | Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.                |
| <b>Installation</b>          | Tackifier or Releasable adhesive Recommended.  |
| <b>Sustainability</b>        | All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001. |

---

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.





