



Classic Track T660

Track Line T661

Track Connection T690

TUNTEX™

Track


We draw inspiration from lines to create dynamic patterns that offer a distinctive visual experience to indoor spaces.







T6611 Brick

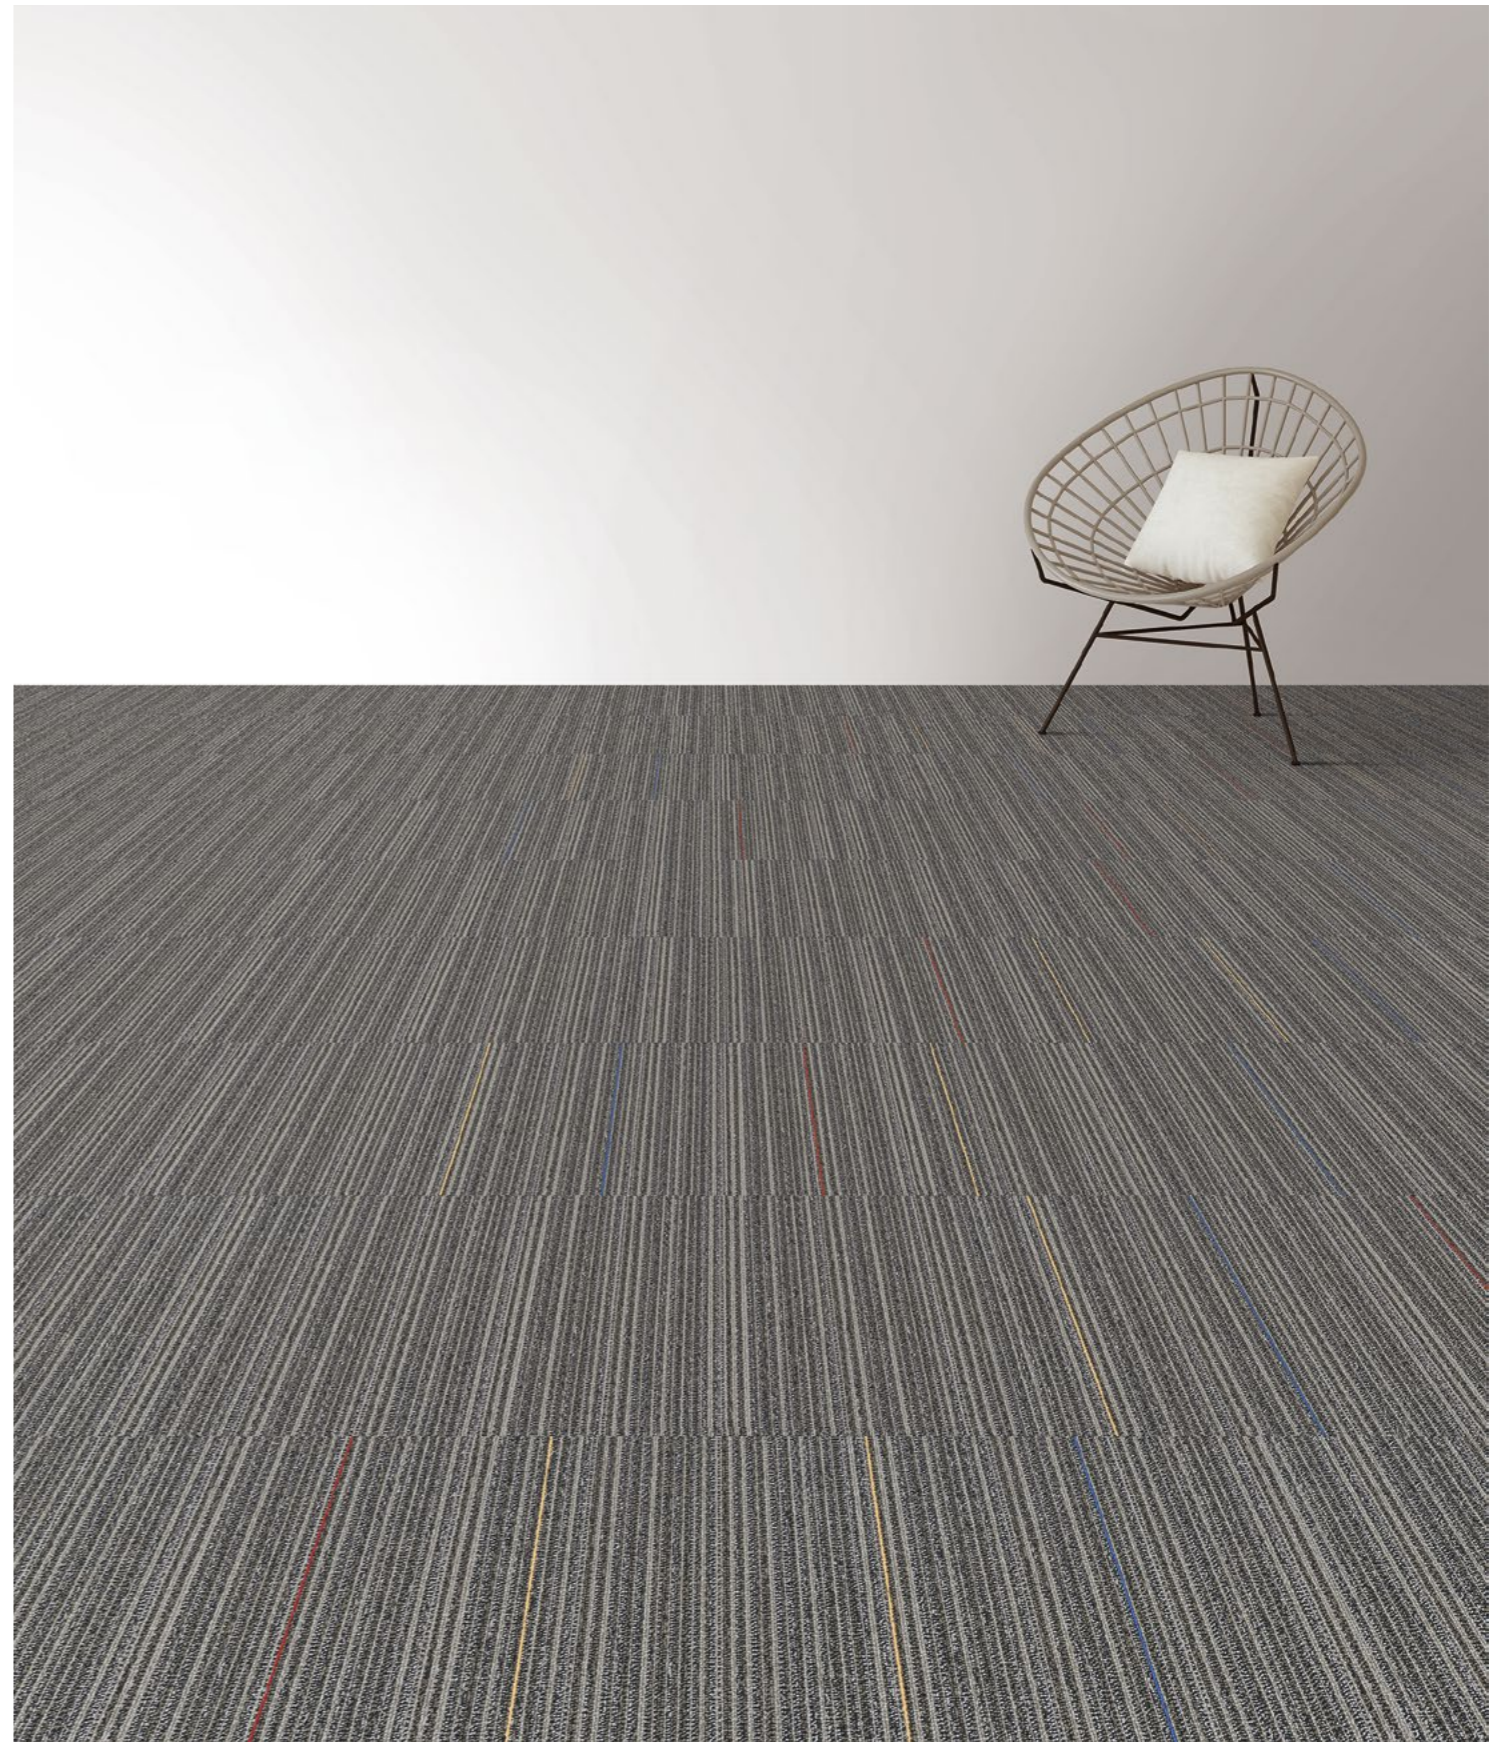

T6604 / T6614 Brick



T6613 Ashlar



T6613 Quarter-Turn





T6613 / T6614 Brick



T6602 / T6612 Brick




T6615 Quarter-Turn




T6607 / T6617 Brick


**T660
Classic Track**

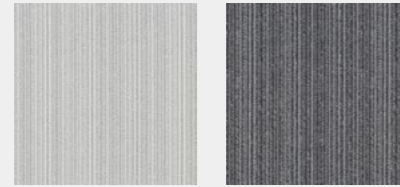


T6601 Cloud T6605 Lead

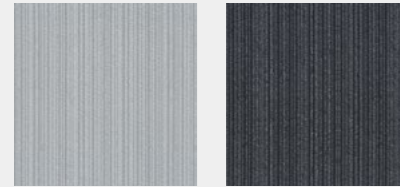


T6602 Coin T6607 Black

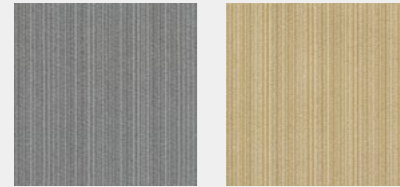

T6603 Dove T6608 Beige

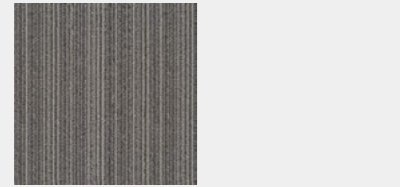


T6604 Granite T6609 Cerulean

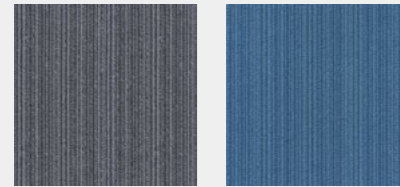


T6606 Charcoal T6609 Cerulean


**T661
Track Line**

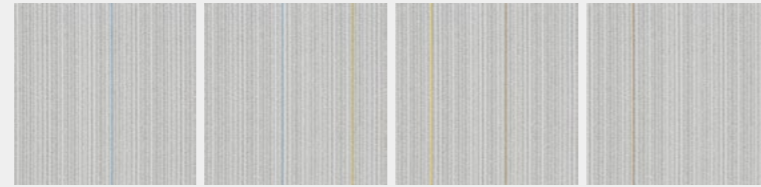


T6611 Cloud Colored

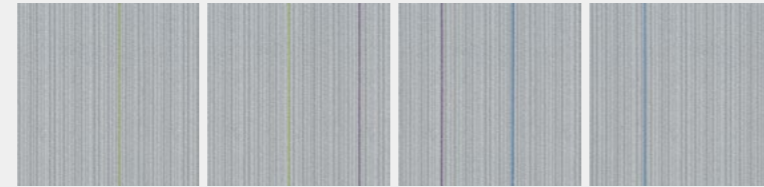


T6612 Coin Colored

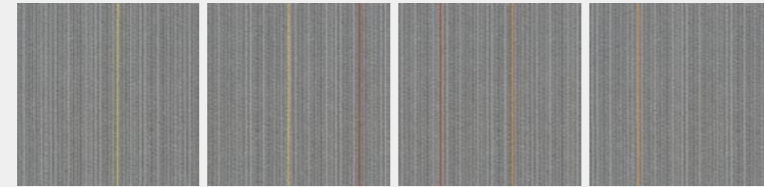


T6613 Dove Colored

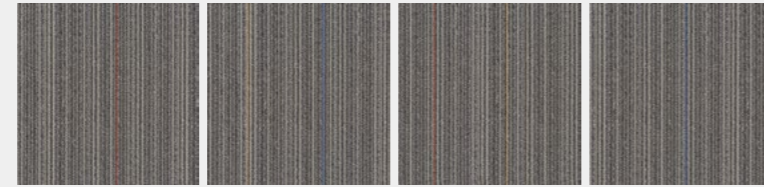


T6614 Granite Colored

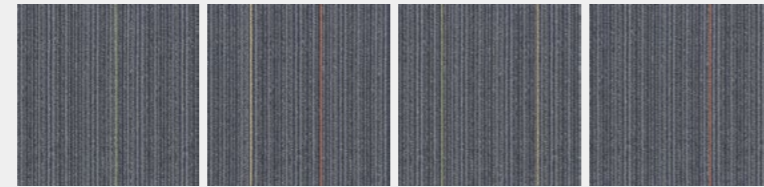

T6616 Charcoal Colored

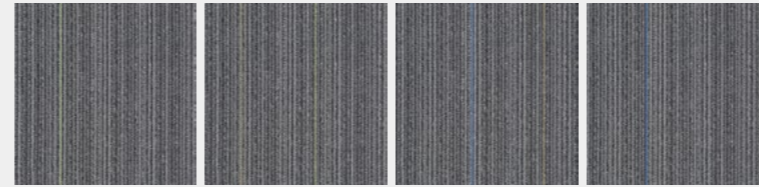

T6615 Lead Colored

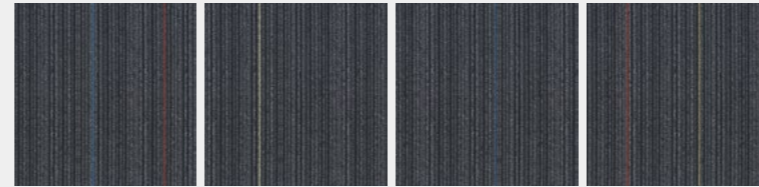


T6617 Black Colored



T6618 Beige Colored

**T690
Track Connection**

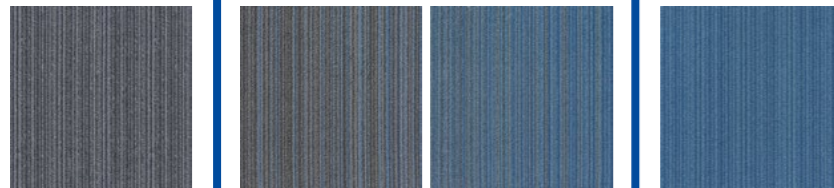

T6606 Charcoal T69009 Sapphire T6609 Cerulean

* T69009 is a transition design, is complementary to T66006 and T66009 to achieve gradation effect in either direction



T6602 / T6606 Quarter-Turn

Style	T660 "Classic Track" / T661 "Track Line" / T690 "Track Connection"
Construction	Hi / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1 / 10G
Pile Height	4.0 / 3.5mm
Total Thickness	6.0 - 6.7mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	4850g - 4900g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAINSHIELD™
Soil Resistance	Soil Guard Treatment: SOILGUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



