

**IN-MOTION**


**T671**



**TUNTEX™**

# In-Motion

The world is always in motion in one form or another. From static to kinetic, every object has some form of energy. Motion is a term that applies to a change in position, shape, boundary and many other aspects and is also a vital law of physics. In-Motion is a unique state of not being stationary and experiencing a sense movement, time and the space.

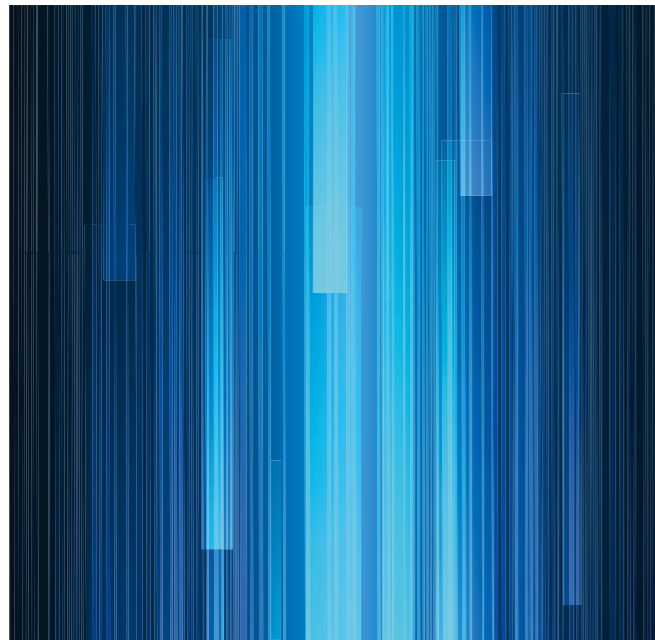

Color: T67101 / T67103 / T67110



# Speed

Motion is speed, movement, energy. The sense of speed is created by moving through a space and experiencing the changes of visuals or positions. The feeling of motion inspires a sense of activity and energy that creates an atmosphere where people can move and interact, never feeling stationary.



# Dynamic

The design captures the beauty of movement standing still and translates such beauty into the floor tiles. The flooring tiles are directional and interchangeable, providing a strong foundation that is flexible to adapt to different spaces and still bring a sense of motion into any scale.






Color: T67106



Color: T67105






Color: T67106 / T67109




Color: T67109 / T10125









T67101 Cloud



T67102 Coin




T67103 Fossil



T67106 Oat




T67104 Charcoal




T67107 Hazel Wood




T67105 Oyster



T67108 Fire



T67109 Shamrock



T67110 Sapphire

<b>Style</b>	T671 "In-motion"
<b>Construction</b>	Hi / Mid / Lo Loop
<b>Pile Fibre</b>	nexlon™ Standard + Circular Premium Solution Dyed Nylon with RECYCLED content, Stain and Soil Resist technology
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	1 / 12G
<b>Pile Height</b>	5.5 / 4.5 / 3.5mm
<b>Total Thickness</b>	7.5mm(±0.5mm)
<b>Tile size</b>	500mm x 500mm
<b>Total Weight</b>	Approx. 4900g / m <sup>2</sup>
<b>Secondary Back</b>	Recyclable TUNTEX Commercial Duraback
<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 KV.
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAINSHIELD™</b>
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOILGUARD™</b>
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤3.5 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

Passes EN 13501 European Fire Test Bfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.



Color: T67101 / T67107



