





BANYAN

T672

TUNTEX™

Lushness

The irregularity and sense of freedom shapes symbolize vitality. One single banyan can become a forest because of its peculiar shape, lush foliage, and huge volume. Inspired by the banyan tree, T672 Banyan creates a beautiful landscape with its dynamic shapes and elegant colors.

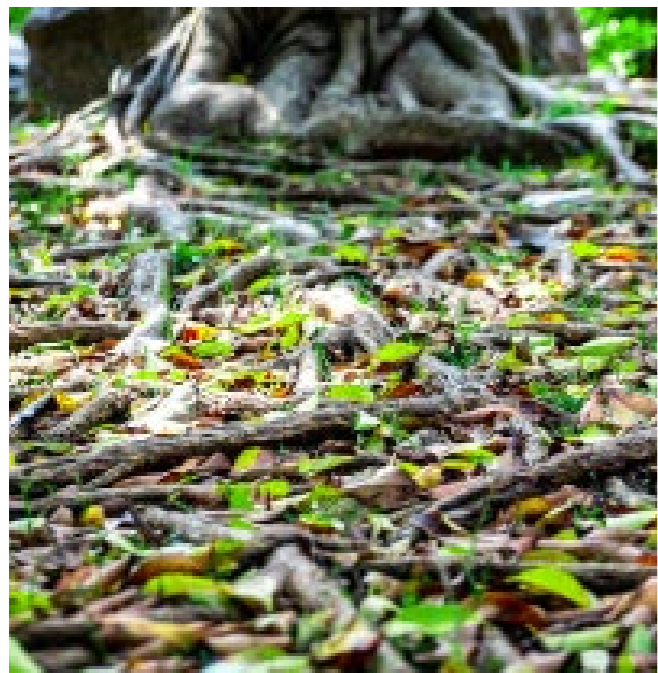

Dynamism

The intertwined branches and roots of the banyan tree are natural textures. T672 Banyan brings this innate wildness to the interior space. The extension of the lines on the ground is an overwhelming dynamism.



Color: T67202 / T67203



Color: T67204 / T67205




Color: T67205 / T67206



Eternity

The evergreen banyan tree makes the beauty last forever. T672 Banyan gives the freshness and flexibility of pattern, as well as soft and comfortable color to permanently frame the beautiful moment.






Color: T67201 / T67202




Color: T67204 / T67206



Color: T67204 / T67206



T67201 Cloud




T67202 Fossil



T67203 Pebble




T67204 Beige



T67206 Rose




T67205 Carob



T67207 Aegean



T67208 Stone



T67209 Olive

Style	T672 "Banyan"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Standard + Quartz Premium Solution Dyed Nylon with Stain & Soil Resist technology
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.0 / 4.0 / 3.0mm
Total Thickness	7.0mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4950g / m ²
Secondary Back	Recyclable TUNTEX Commercial Duraback

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Stain Resistance	Stainshield Treatment: STAINSHIELD ™
Soil Resistance	Soil Guard Treatment: SOILGUARD ™
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Critical Radiant Flux: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Electrostatic Propensity: Passes (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



Color: T67201 / T67207 / T67208



