

TUNTEX




9-1-1

Station Cold The

ide wait for no man. ves and seeing the tides being high or low, agic and power of time.

Time & Tide

Time & Tide Collection is dedicated to the greatest of time. Based on neutral colors that symbolize eternity, the gradient colors simulate the trail of time flowing.



T873 Tide opens to a special cross pattern, while T673 Time conveys a positive meaning with bright accents. The simple and modern design accommodates a variety of environments including commercial, hospitality, and public spaces.












T67320 / T67321 Quarter-Turn








T67311 Quarter-Turn

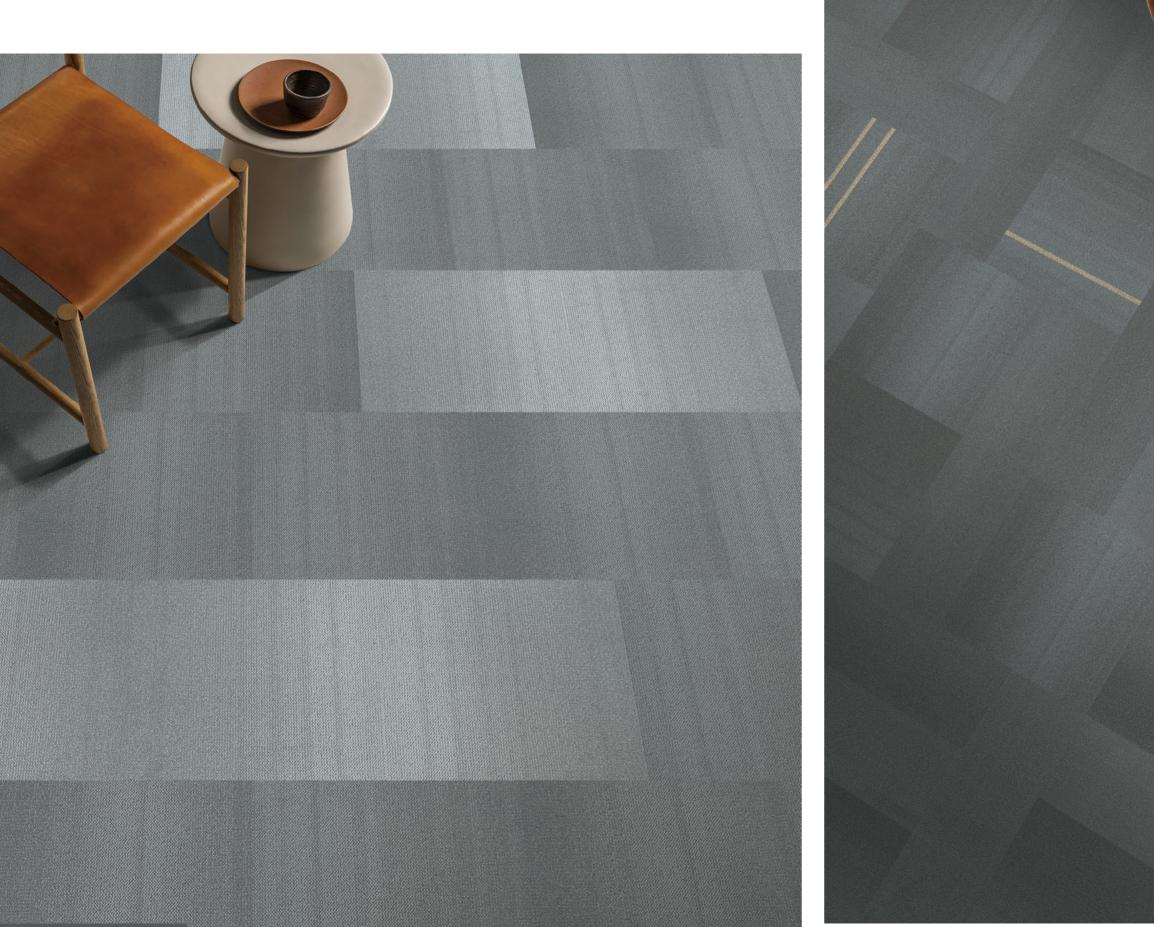

T67310 / T67320 Brick





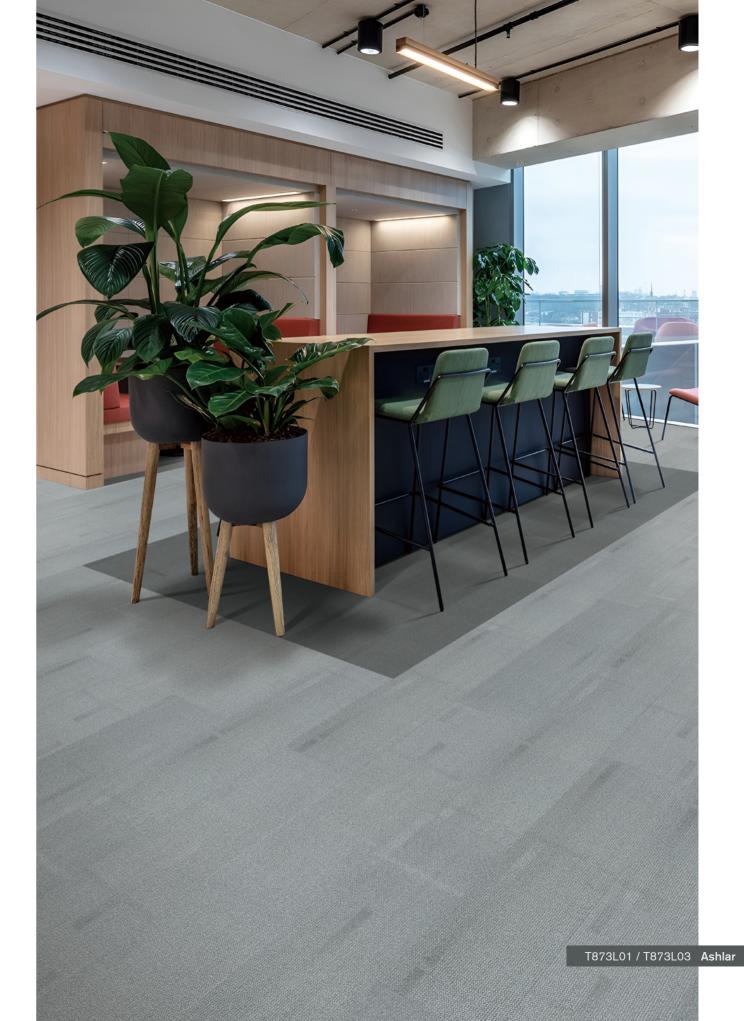







T67311 Cloud Green



T67320 Fossil



T67331 Iron Yellow











T67310 / T67311 / T67320 / T67330 / T873S01 / T873S02 / T873S03

Style	T673 "Time"
Construction	Multi Hi / Lo Loop
Pile Fibre	nexlon [™] Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1 / 10G
Pile Height	6.0 ~ 4.0mm
Total Thickness	6.7mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4950g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAINSHIELD"
Soil Resistance	Soil Guard Treatment: SOILGUARD"
Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.
Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.	
U.S. CRI Green Label Plus Certificate.	
Singapore Green Building Council Product Certificate - 4 Ticks "Leader".	
Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)	
Passes AATCC Static Propensity Test. Static Propensity: ≤ 2.0 KV (AATCC 134)	
Passes the Quality Test of China National Carpet Quality Test Center.	
Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.	
ISO 9001 Quality Management System.	
ISO 14001 Environmental Management System.	
ISO 45001 Healthy & Safety Management System.	
VERIFIED VERIFI	

