



Glacier


T675



TUNTEX™

Glacier

Glaciers are a natural landscape that formed in place where snow piles up each year then melts. Due to gravity and weight, snow begins to compress and get tightly packed again, accumulating over time, becoming large, thick ice masses. It's a magnificent and pristine art piece created by nature, and also the largest reservoir of fresh water on the planet.

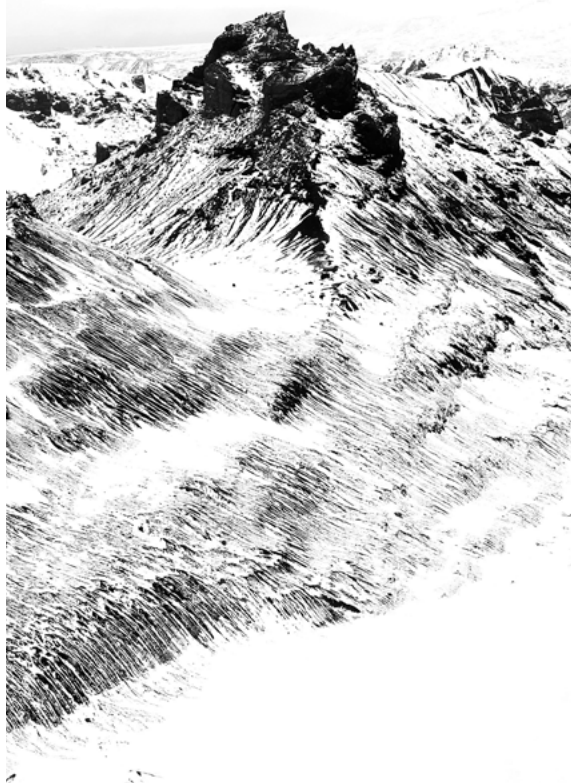





T67514 Brick



T67513 / T67514 Brick





T67512 Brick



T67512 / T67513 Brick



T67501 / T67503 Brick




T67501 / T67505 Brick






T67503 Ashlar

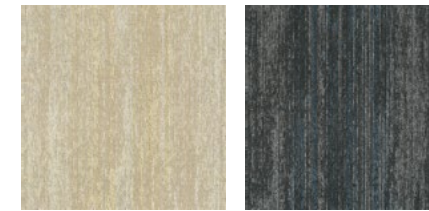


T67501 Oat T67508 Shadow



T67502 Hazel Wood T67509 Slate

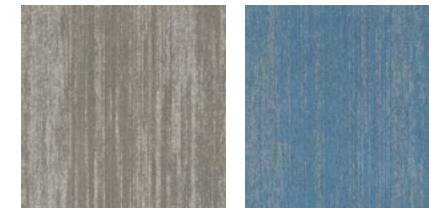

T67503 Hazelnut T67510 Stone

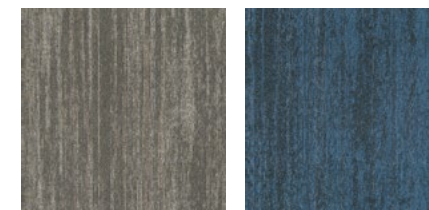


T67504 Ash T67511 Denim



T67505 Grey T67512 Cloud



T67506 Fossil T67513 Pear

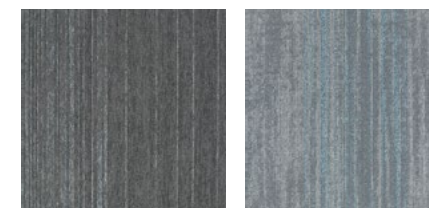

T67507 Lead T67514 Sky

Style	T675 "Glacier"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with quartz and aircell
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	6.0 / 5.0 / 3.5mm
Total Thickness	7.2mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4950g/m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAINSHIELD™
Soil Resistance	Soil Guard Treatment: SOILGUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



