


TUNTEX™


Moonwalk

What does walking on the moon feel like?

"I'd sum it up with wonder, awe, excitement and adventure" said Charlie Duke, Apollo pilot describing the feeling of walking on the moon. Reduced traction, uneven ground and lower gravity, are all the challenges of walking on the moon but never limited human being's fascination about it.

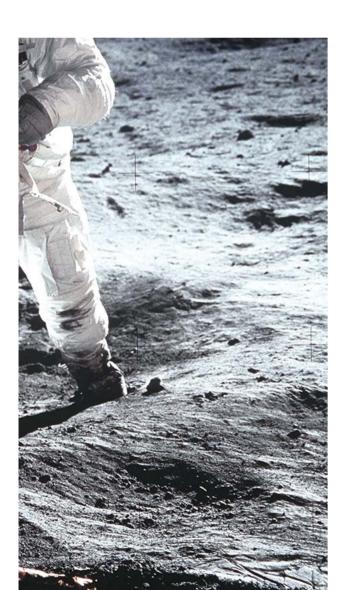



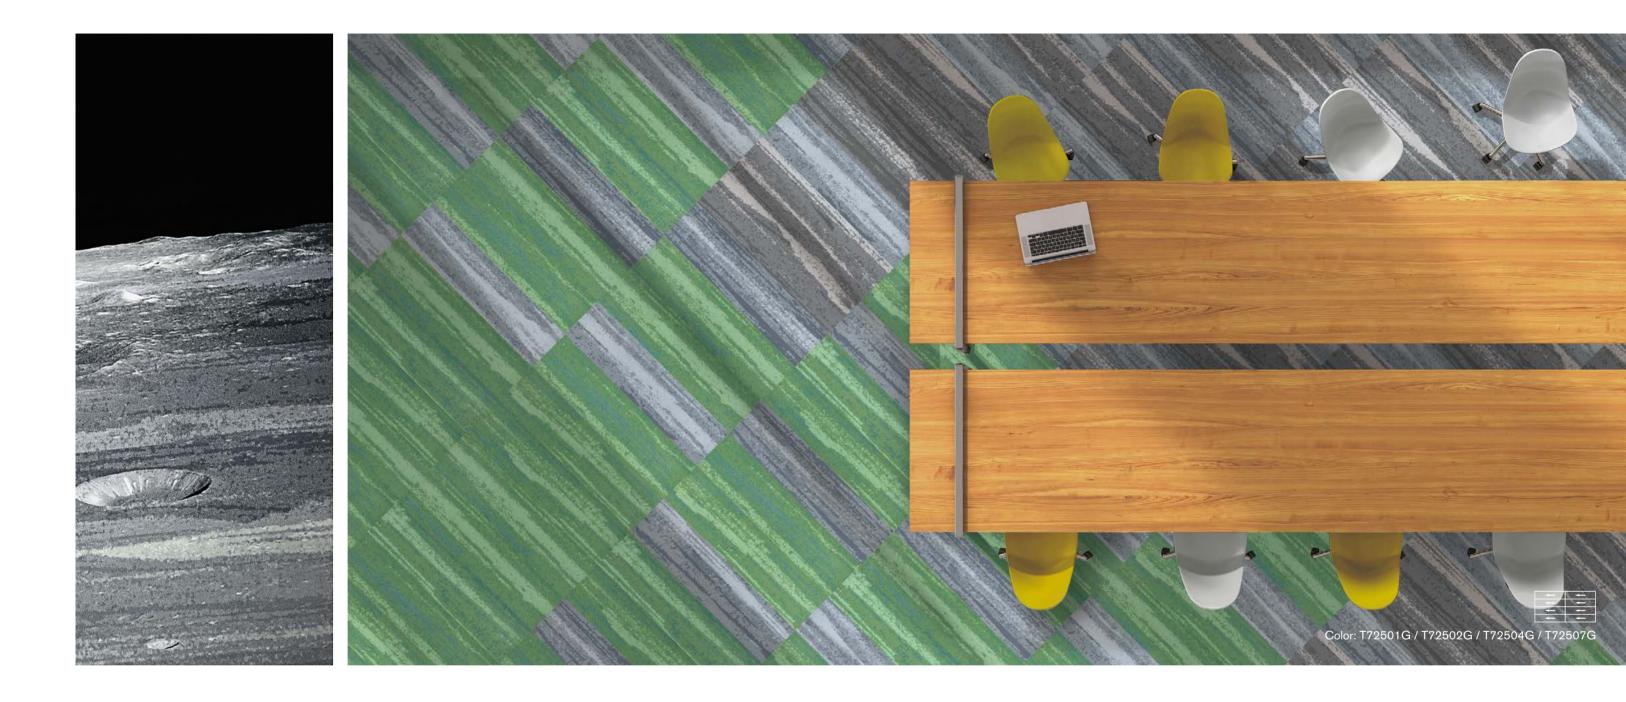

Landform


The moon surface is covered with dead volcanos, craters, lava flow canyons and a variety of other surface features. It's a beautiful terrain with all different types of landforms - some powdery, some rocky, some dark, some light, but all formed naturally and remain untouched. In a way, the freely formed texture of moon surface represents the beauty of nature and power of the universe.




Artistic

People have great imagination and curiosity for the moon and has inspired a multitude of art creations. The Moonwalk movement in hip-pop dance, invented by Michael Jackson, was one of the most iconic and admired interpretations. With direct inspiration from the moon surface, Tuntex introduced its first Plank series using color-point tufting machine, allowing more artistic patterns for creators to take their inspiration out of this world.



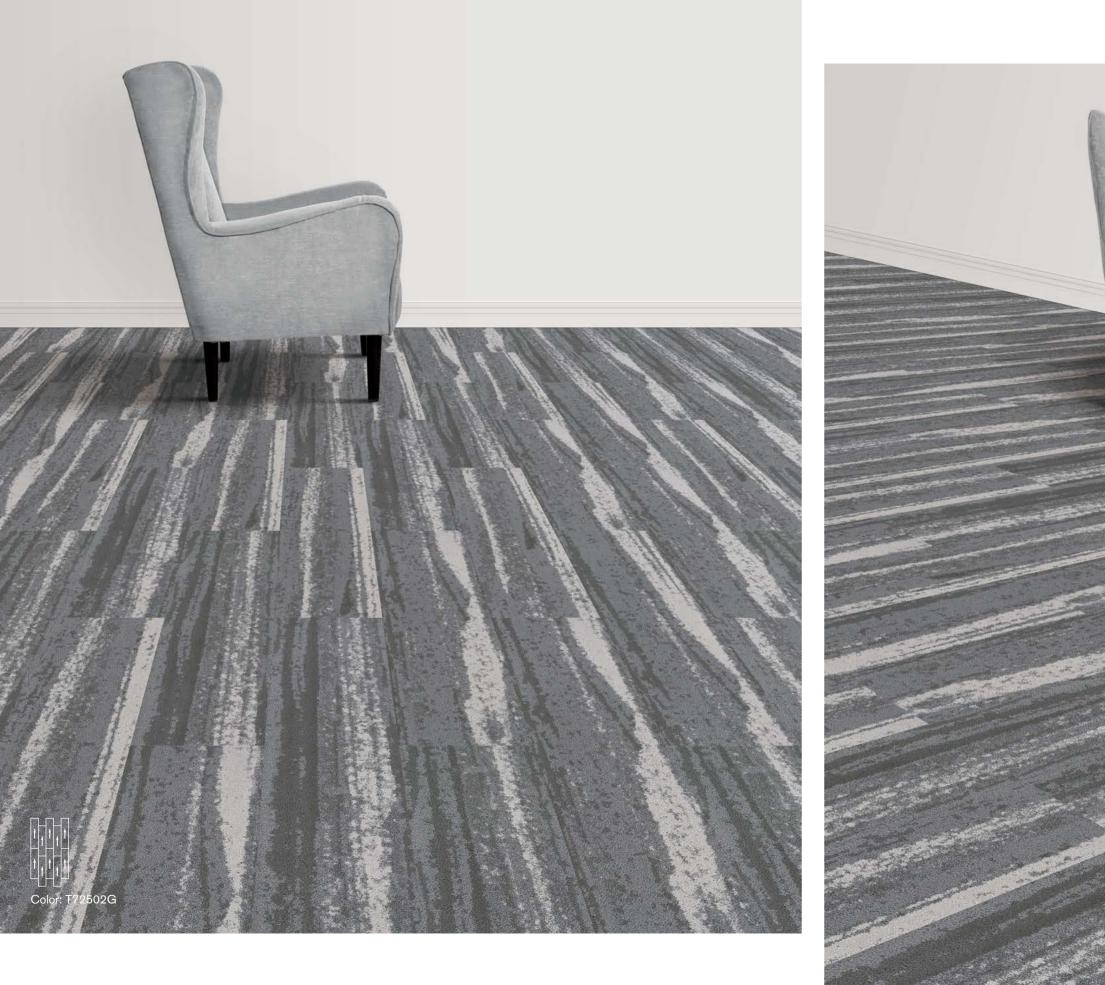





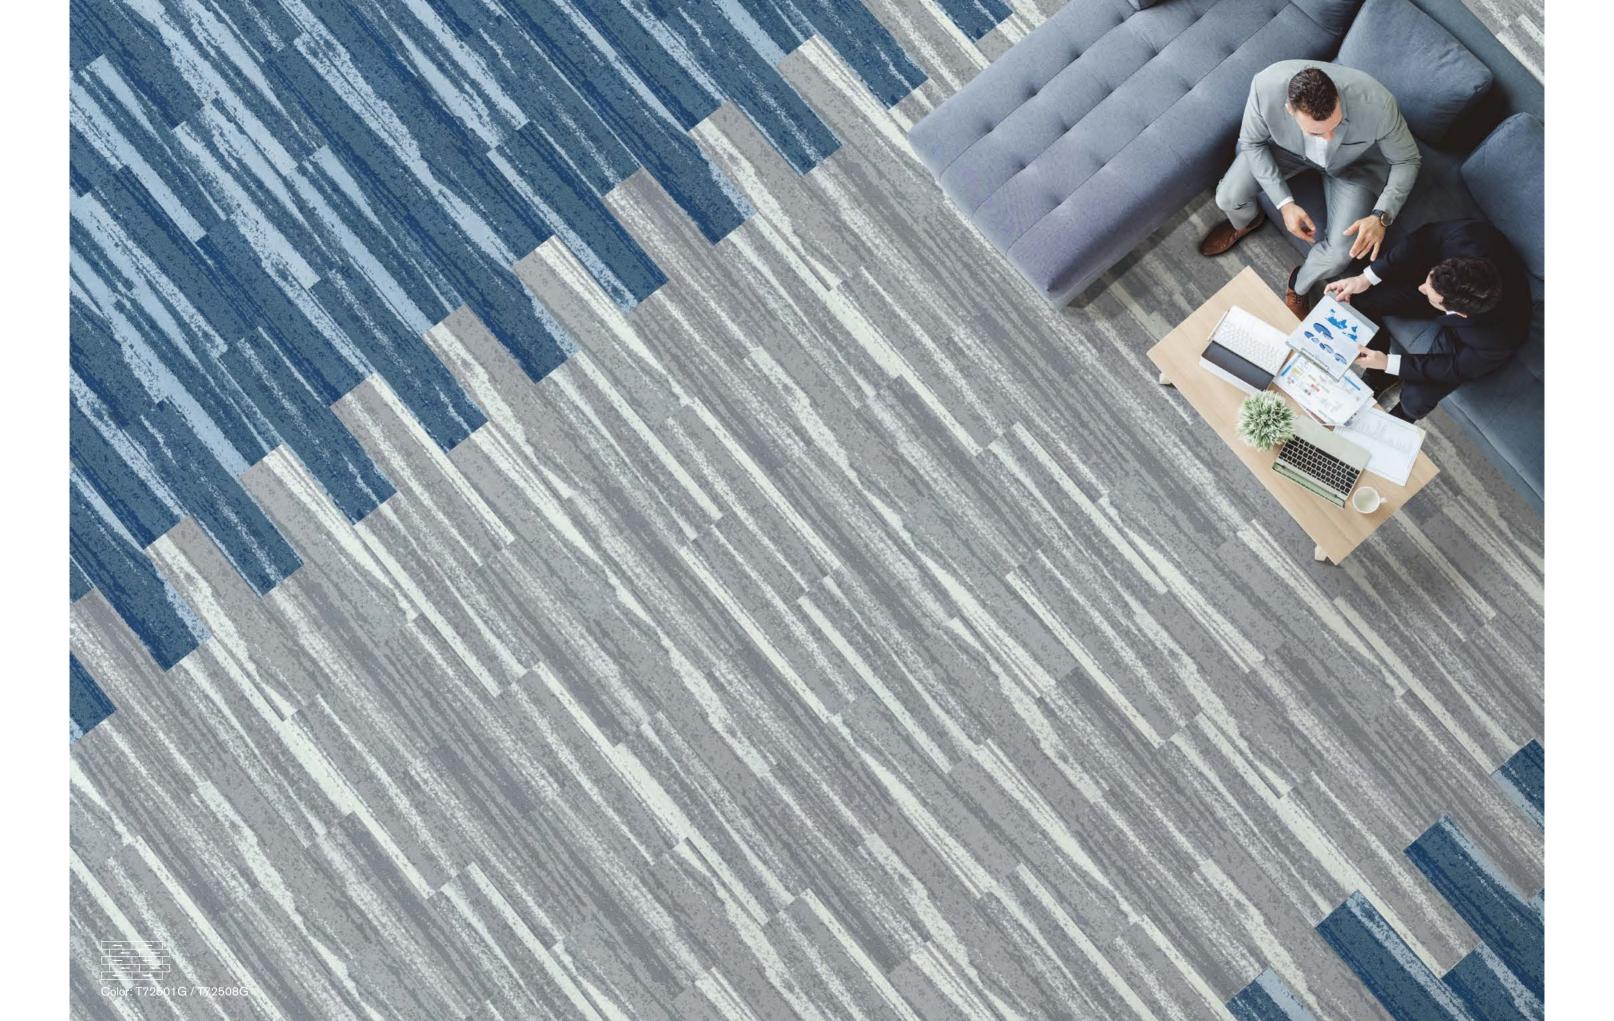





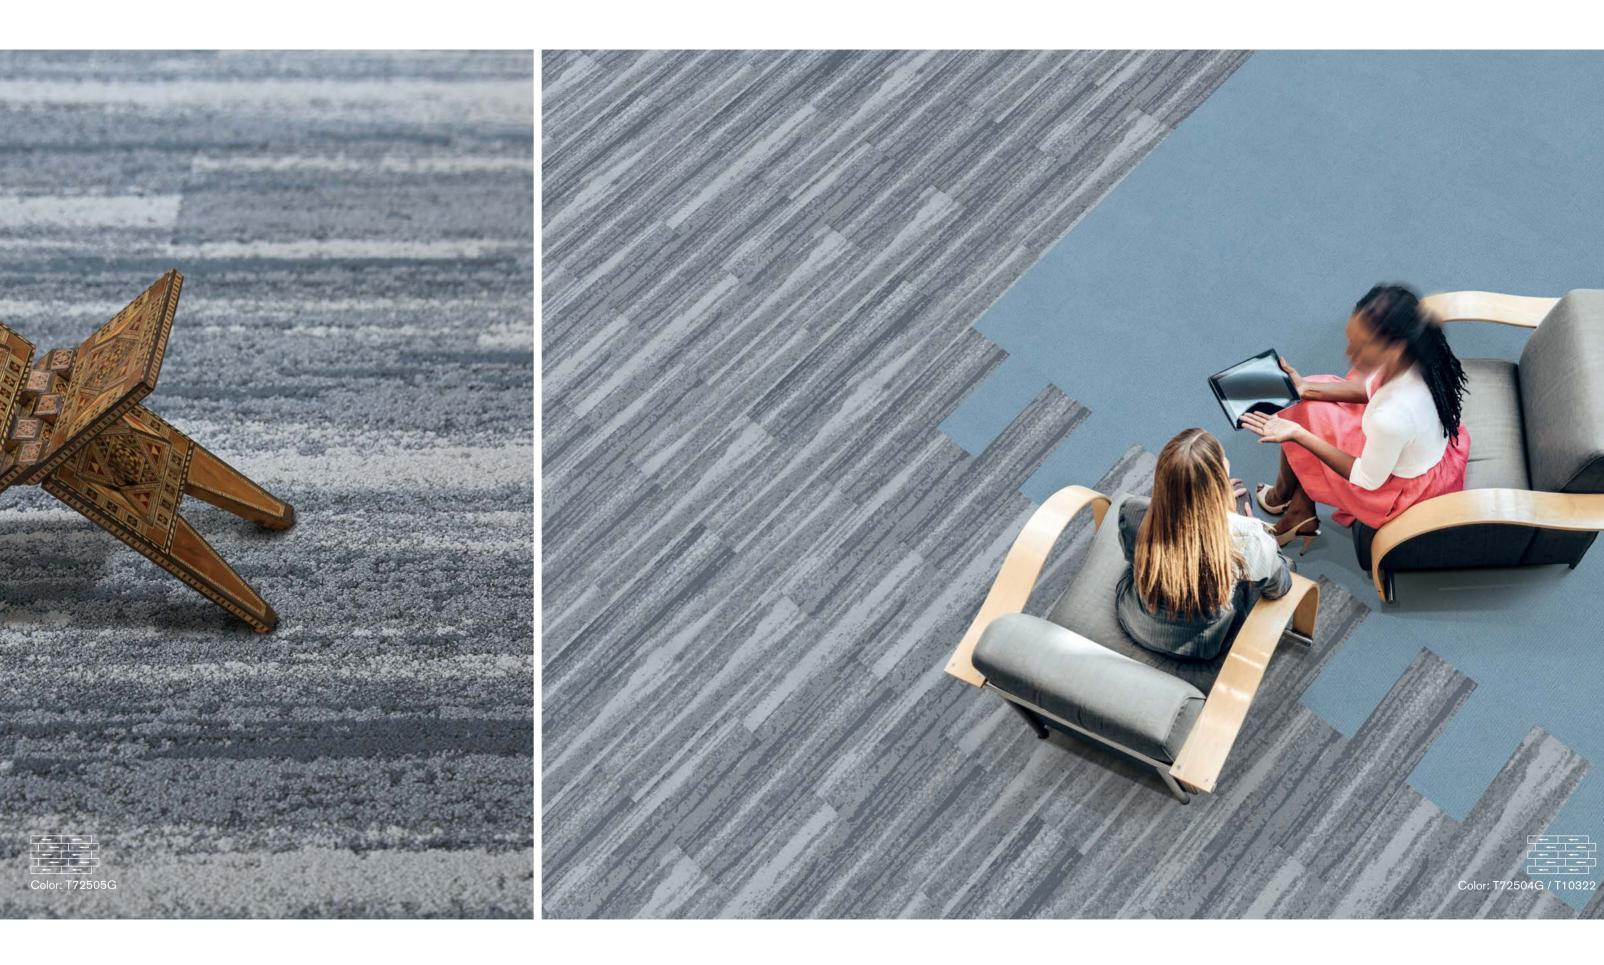

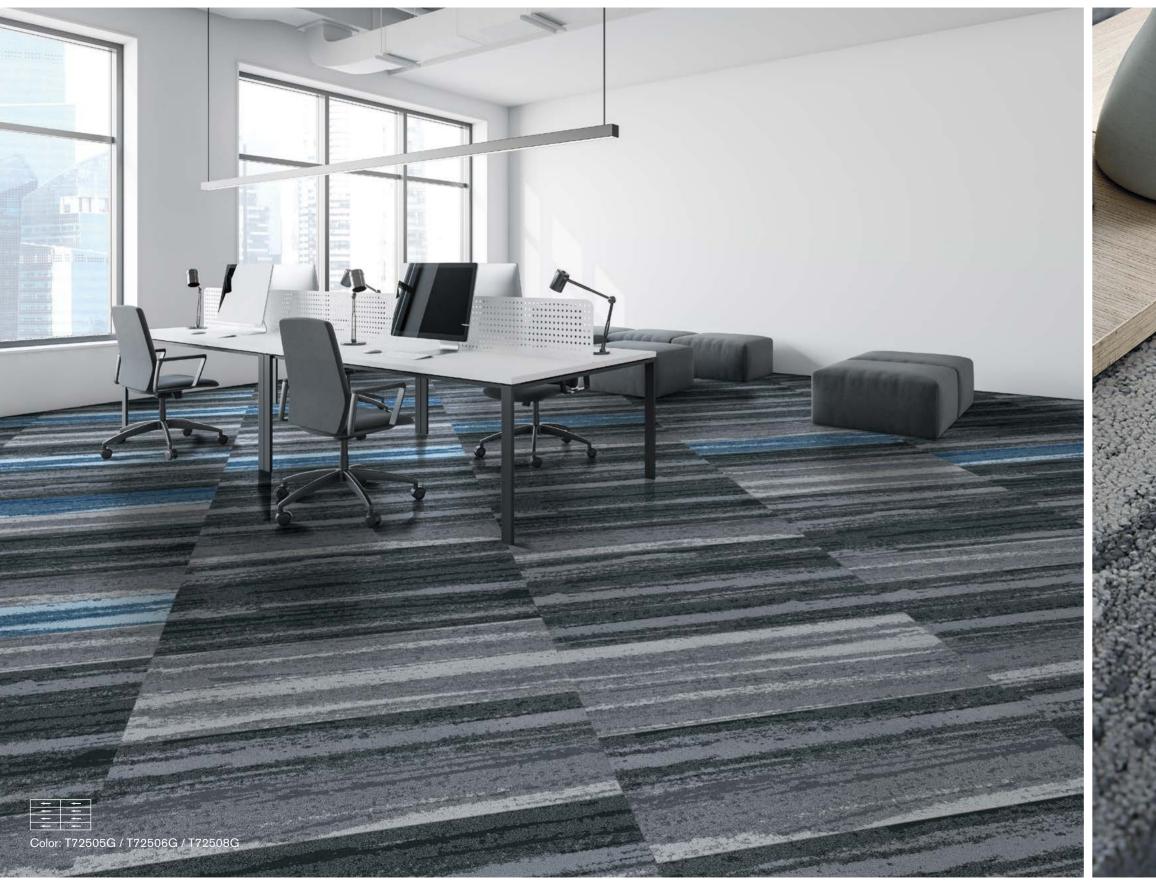













T72501G Crescent moon



T72502G Full moon



T72503G Super moon



T72504G Lunar rover



T72505G Armstrong



T72506G Lunar eclipse



T72507G Apollo



T72508G Blue moon

Style T725G "Moonwalk"

Multi Hi / Lo Loop with Tip-Shear Finish Construction

nexlon[™] Standard + Prisma Premium Solution Dyed Nylon Pile Fibre

with Stain & Soil Resist Technology

Dye Method Solution Dyed

1 / 10G Gauge

Pile Height 8.0 - 5.0mm

Total Thickness 8.5mm(±0.5mm)

Tile size 250mm x 1000mm **Total Weight** Approx. 6350g / m²

RECYCLED TUNTEX Commercial Duraback Secondary Back

Wear Warranty Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

Static Electricity Permanent Lifetime Protection - less than 2.0 KV.

Stain Resistance Stainshield Treatment: STAINSHIELD Soil Resistance Soil Guard Treatment: SOILGUARD™ **Odor Reducer** Ecofresh Treatment: ECOFRESH™

Anti-microbial Microshield Treatment: MICROSHIELD™

Dimensional Stability Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.

Tackifier or Releasable adhesive Recommended. Installation

All yarns used are Solution dyed to minimise use of water and exclude any effluent production. Sustainability

ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test. Static Propensity: ≤2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

Passes EN 13501 European Fire Test Cfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.



















