


Track 25

T806 Track 25 utilizes changes in line shapes to outline the overall environment and make it more dynamic and captivating. The added accent further enhances this effect, creating a lively and animated atmosphere.





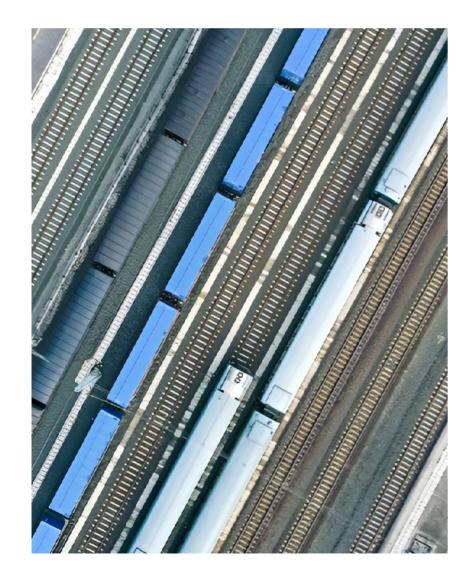









T80601 Cloud



T80602 Coin



T80603 Dove



T80604 Granite



T80605 Lead



T80606 Charcoal



T80607 Black

T806 "Track 25" Style

Hi / Lo Loop Construction

nexlon[™] Premium Solution Dyed Nylon Pile Fibre

Dve Method Solution Dyed

1 / 10G Gauge

Total Weight

Stain Resistance

4.0 / 3.5mm Pile Height

6.0mm(±0.5mm) **Total Thickness**

Tile size 250mm x 1000mm

Secondary Back TUNTEX Duraback

Soil Resistance Soil Guard Treatment: SOILGUARD™

Approx. 4850g / m²

Product is warranted not to lose more than 10% pile fibre by **Wear Warranty**

weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

Static Electricity Permanent Lifetime Protection - less than 2.0 KV.

Dimensional Stability Warranted not to change in size by more than 0.5 mm in normal

use. Will not dome or dish in normal use.

Stainshield Treatment: STAINSHIELD"

Installation Tackifier or Releasable adhesive Recommended.

All yarns used are Solution dyed to minimise use of water and exclude any effluent production. Sustainability

ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test. Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.















