

A hand is holding a blue tassel bag. The bag is made of a dense, fine-textured material and has a long, thick fringe of blue tassels hanging from the bottom. The top of the bag is a light-colored, possibly leather or faux leather, with a decorative metal clasp. The background is dark and features intricate floral embroidery in shades of blue, green, and pink. The overall scene is set against a dark, textured surface, possibly a metal railing or a wall.

Tassels

T808

TUNTEX™



Tassels


T808 Tassels captures the beauty of the tassel pattern, much like a gentle breeze bringing to life a picturesque scene.



T80845 Ashlar




T80823 / T10823 Ashlar

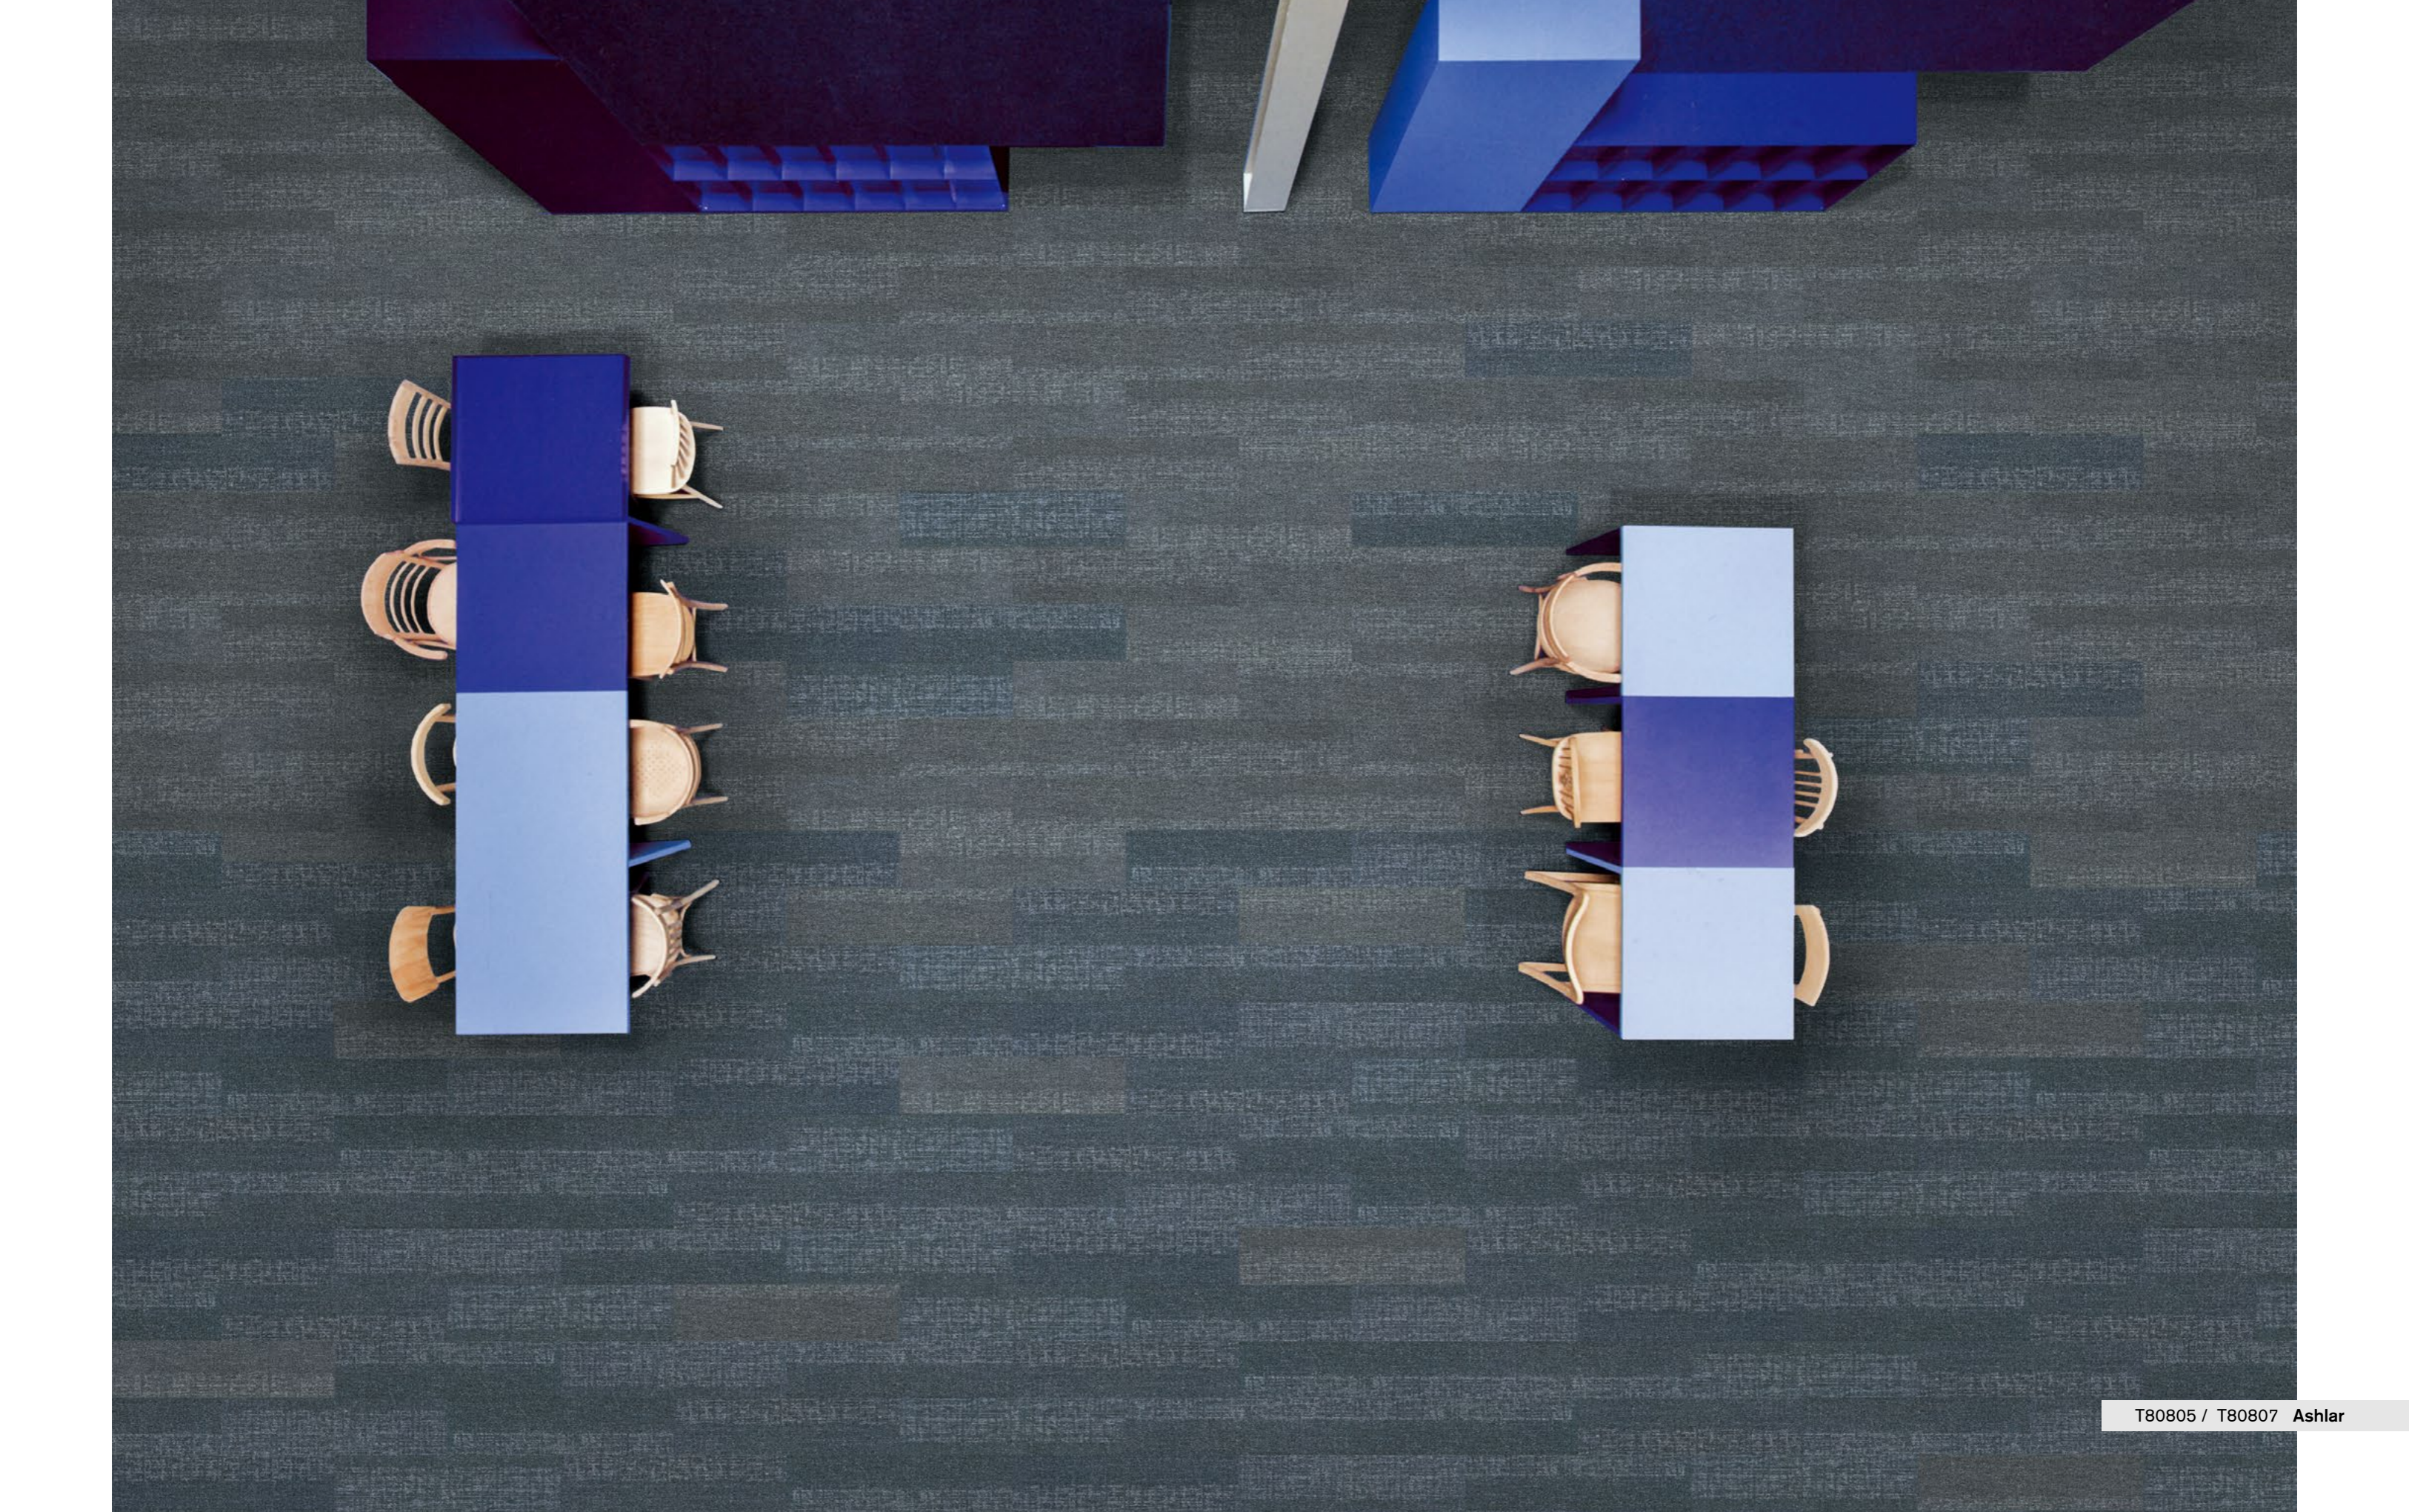




T80803 Ashlar

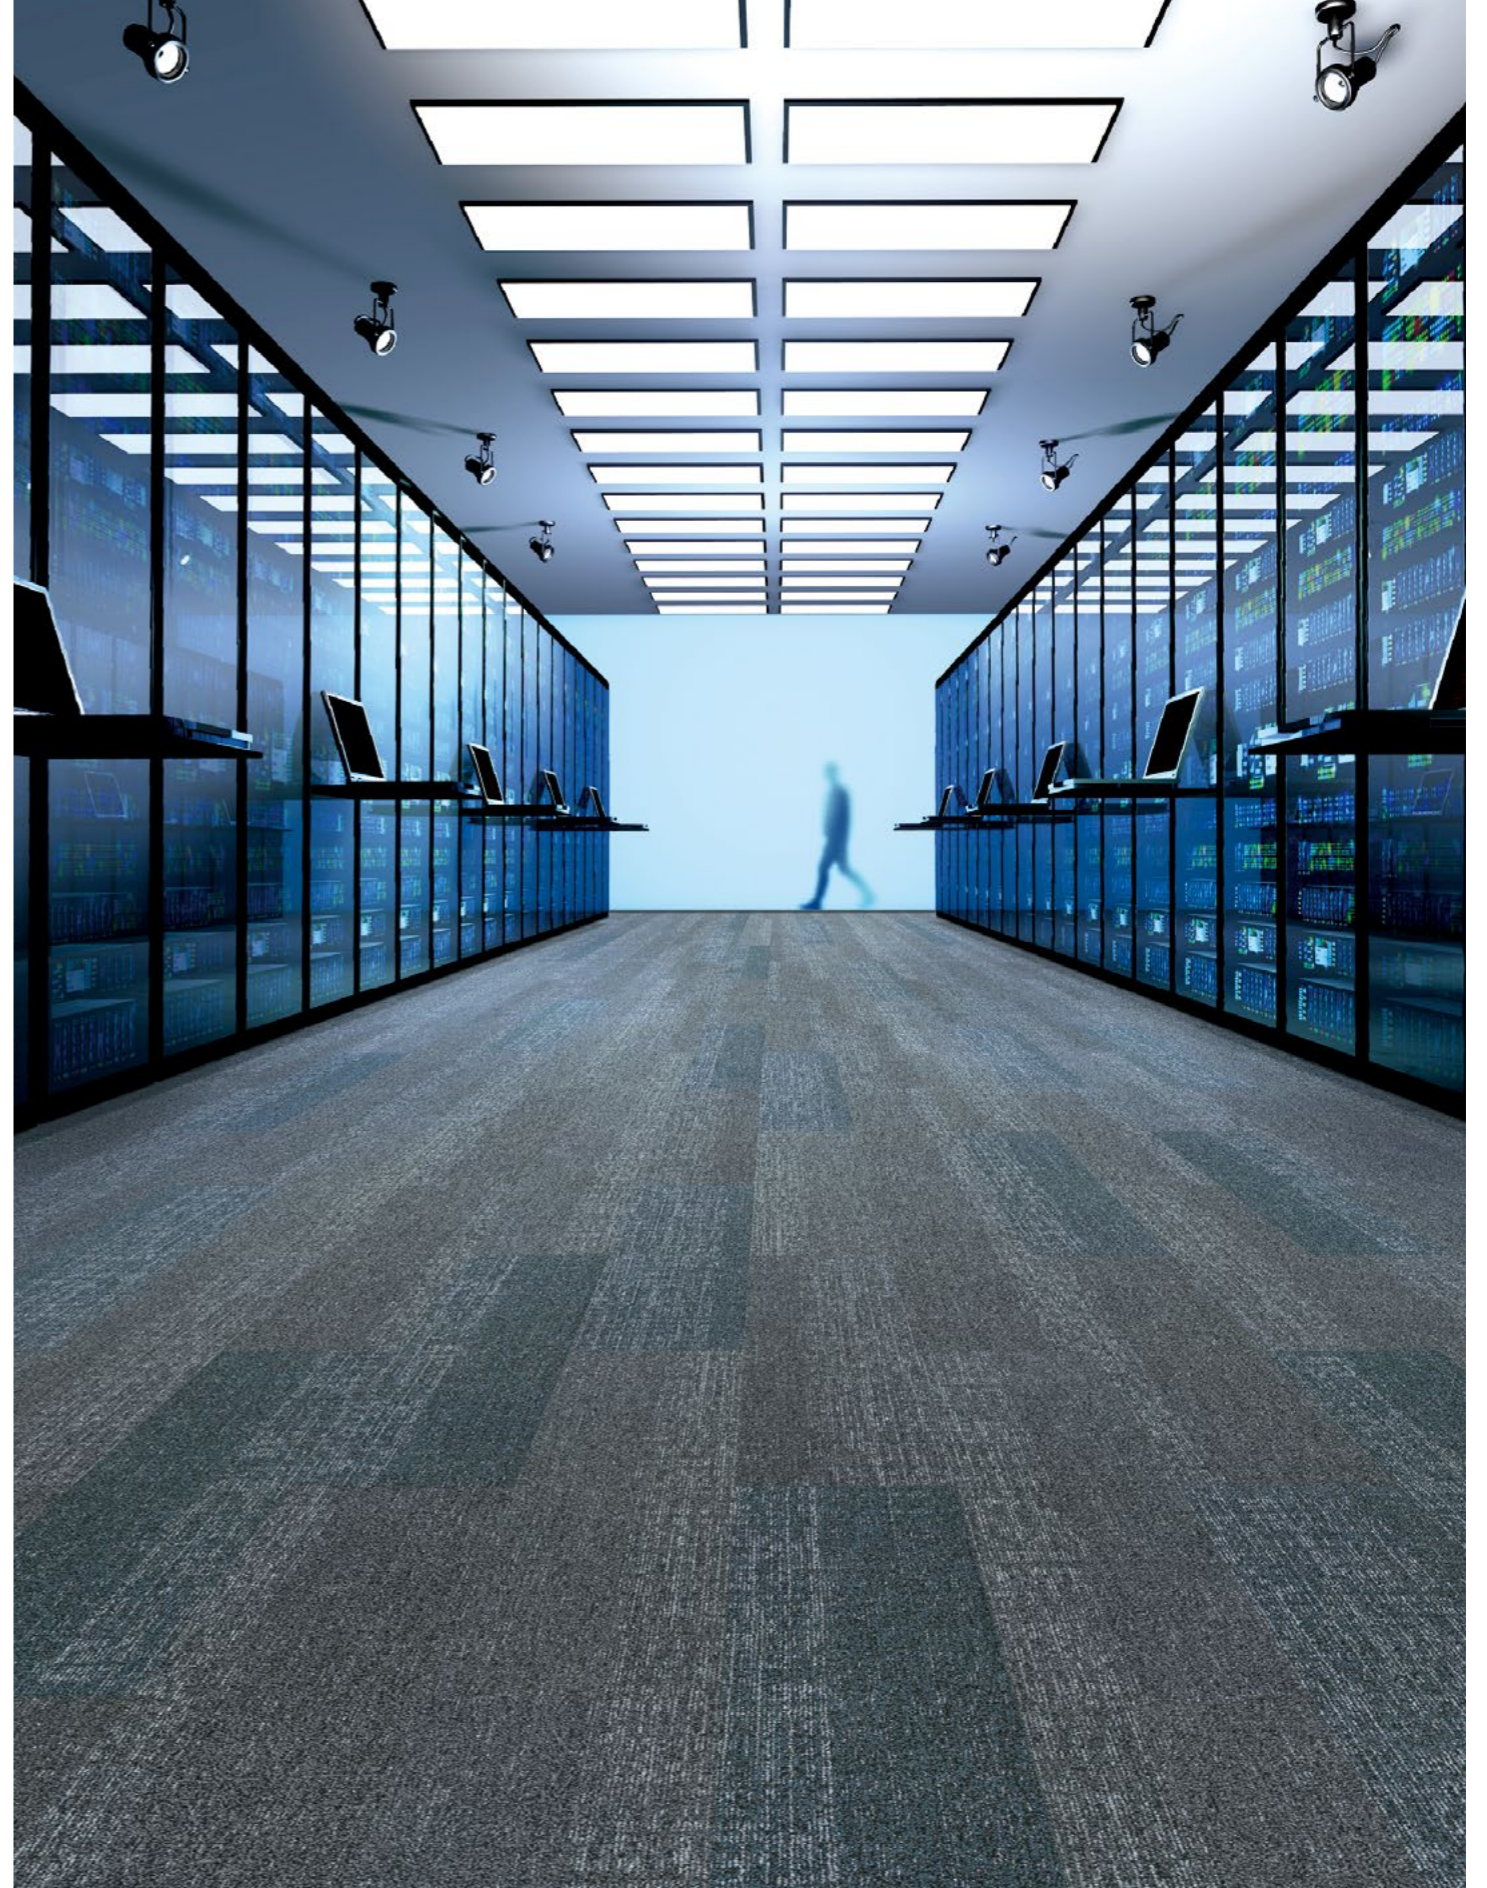

T80805 / T80807 Ashlar

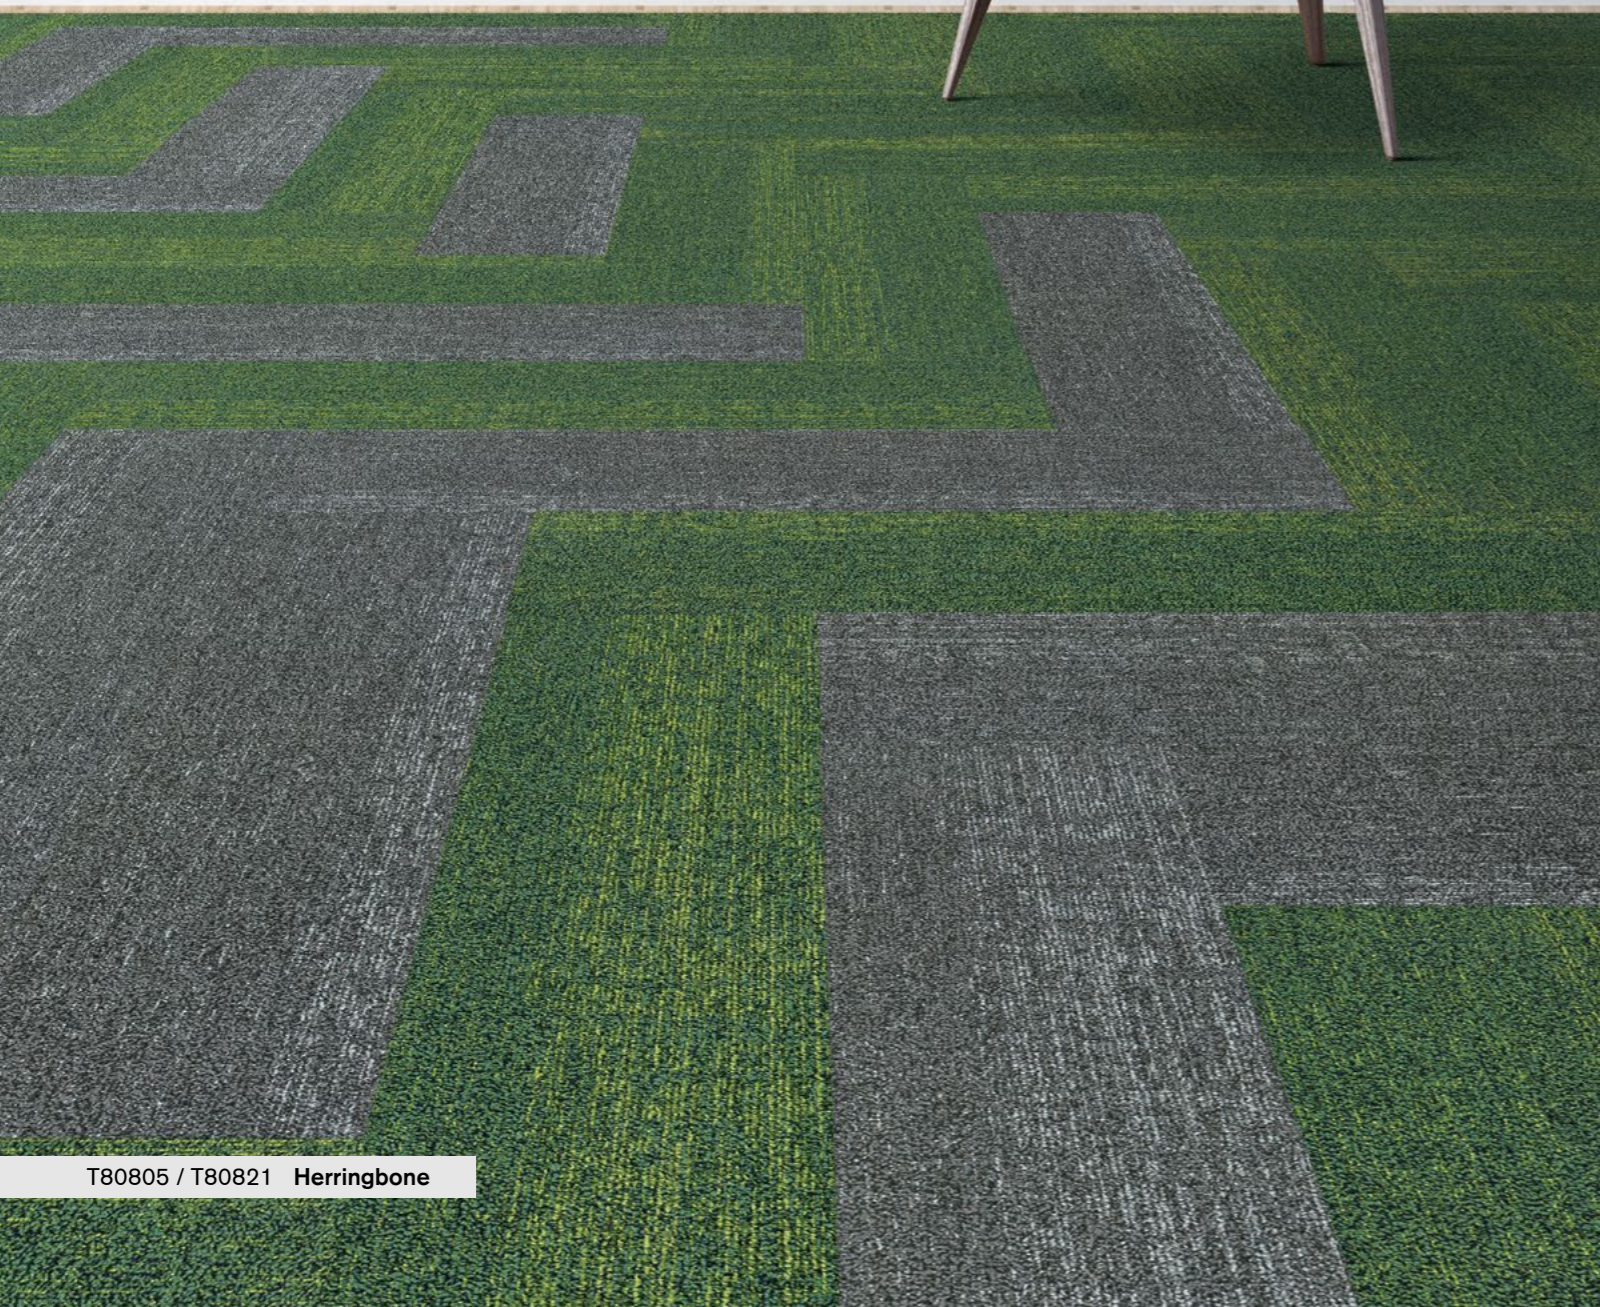

T80805 / T80821 Herringbone



T80846 Cloud



T80834 Hazel Wood



T80817 Flaxen



T80845 Silver



T80803 Ash




T80805 Smokey



T80806 Charcoal



T80807 Lead



T80823 Denim



T80821 Emerald

Style	T808 "Tassels"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.0 / 4.5 / 3.0mm
Total Thickness	7.0mm(±0.5mm)
Tile size	250mm x 1000mm
Total Weight	Approx. 4900g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAINSHIELD™
Soil Resistance	Soil Guard Treatment: SOILGUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



