



Immerse

T816




TUNTEX™

Immerse

Design has the mysterious power to evoke feelings, desire and influence people's emotions. It's a way to communicate, share and explore but also an immersing process that needs creativity, enthusiasm and passion.




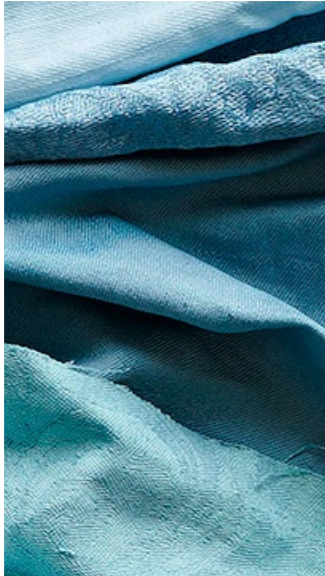

T81606 / T81608 / T81609 Herringbone

Engaging

Design can be subtle and minimum, but its beauty comes from its ability to create an immersive environment that triggers people's desire to engage and explore every single aspect of it.

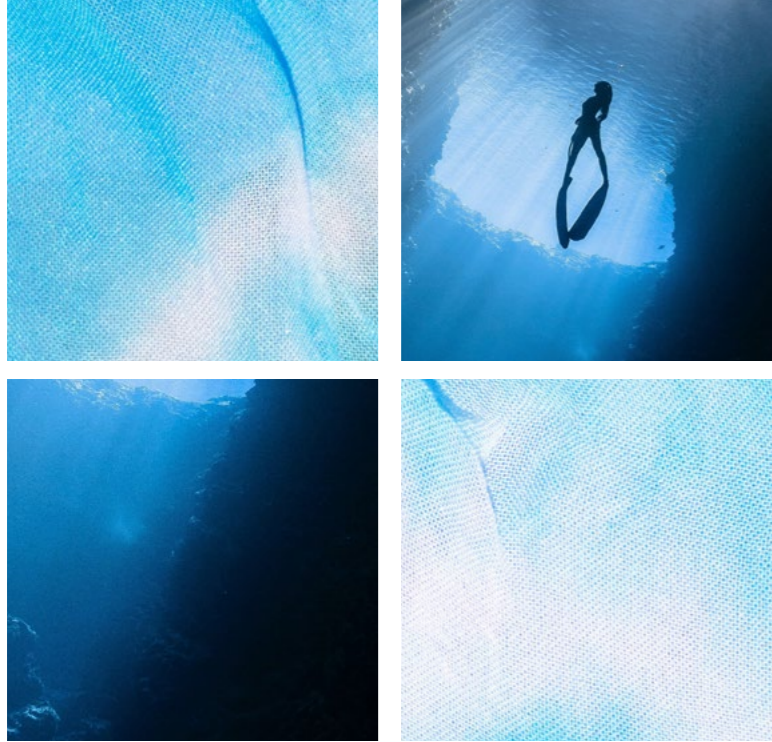

Integrated

The design of T816 Immerse is so well integrated that texture and patterns are gradually merged into each other, like submerging an art piece under water, giving an abstract and gleaming look that demands more attention.



T81609 / T81616 Ashlar



T81609 / T81616 Ashlar





T81601 / T81613 / T81614 Herringbone



T81601 / T81615 Herringbone



T81603 / T81608 / T81609 **Brick**



T81603 / T81608 / T81609 **Ashlar**






T81601 / T81603 Ashlar




T81601 Sugar Cookie



T81603 Umber




T81606 Cloud



T81608 Fossil



T81609 Shadow



T81613 Blush



T81614 Orange



T81615 Mustard



T81616 Moss



T81617 Azure

Style	T816 "Immerse"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with quartz
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.5 / 4.5 / 3.0mm
Total Thickness	7.0mm(±0.5mm)
Tile size	250mm x 1000mm
Total Weight	Approx. 4900g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



