



Tetrix

T851



TUNTEX™


Tetrix

Tetrix is a block-based puzzle game invented in the 80s and has been one of the most popular classic video games among all generations. It has a very simple goal of destroying blocks by completing a line without reaching the top. The game provides a lot of fun by stacking and organizing the colorful blocks as if building a brick wall.





T851
product insight

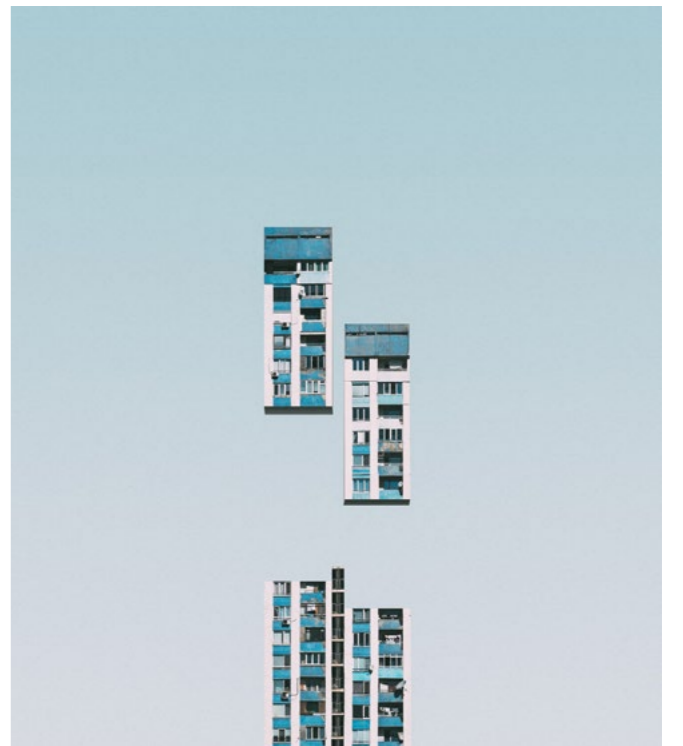

All images are computer generated files and may not exactly represent actual installation appearance and tile seams. Full tiles can be provided if required.




T85102 Ashlar



T85101 / T85103 Ashlar

Variation

In Tetris, seven simple units can be moved, flipped and rotated to create a variation of shapes. The same basic elements create different variations of shape and colors that can be mixed and interchanged to create a variety of results in the end. Tetris doesn't have solution, but rather a variety of opportunities.

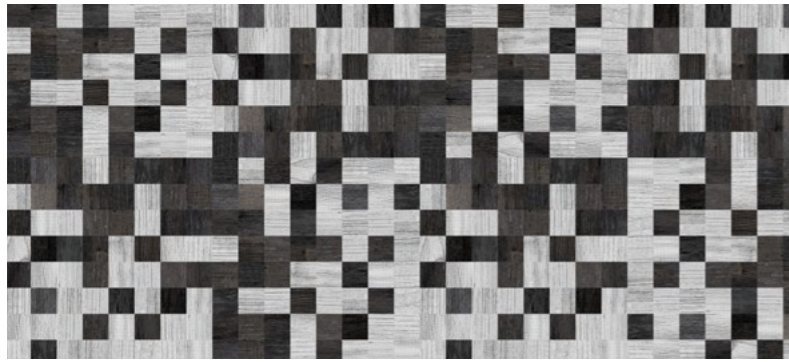

Modular

The modular concept emerging from Tetris has been applied in architecture practice in many ways, creating a sense of simplicity and expansion through the use of simple modules that have infinite possibilities.



T85101 Herringbone



T85107 Basketweave






T850107 / T85108 Ashlar



T85106 / T85107 / T85109 Ashlar



T85101 / T85104 Basketweave



T85101 Beige



T85102 Hazel Wood



T85103 Coffee




T85104 Syrup



T85105 Dove



T85106 Fossil




T85107 Iron



T85108 Shadow



T85109 Slate



T85110 Aegean



T85111 Navy



T85112 Juniper

| | |
|-------------------------|--|
| Style | T851 "Tetrix" |
| Construction | Hi / Mid / Lo Loop |
| Pile Fibre | nexlon™ Premium Solution Dyed Nylon |
| Dye Method | Solution Dyed |
| Gauge | 1 / 12G |
| Pile Height | 5.0 / 4.5 / 3.0 mm |
| Total Thickness | 6.5mm(±0.5mm) |
| Tile size | 250mm x 1000mm |
| Total Weight | Approx. 4800g / m ² |
| Secondary Back | TUNTEX Duraback |
| Stain Resistance | Stainshield Treatment: STAINSHIELD™ |
| Soil Resistance | Soil Guard Treatment: SOILGUARD™ |

| | |
|------------------------------|--|
| Wear Warranty | Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years. |
| Colour Fastness | 15 Year Warranty AATCC 16. Grade 4 - Little or no change. |
| Static Electricity | Permanent Lifetime Protection - less than 2.0 KV. |
| Dimensional Stability | Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use. |
| Installation | Tackifier or Releasable adhesive Recommended. |
| Sustainability | All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001. |

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



