




Ripple  
T852

TUNTEX™



# Poetic

A stone hits the surface of the river. It creates ripples, reaching out to unseen boundaries. Natural and poetic scenery invoke the deepest sentiments of our own.

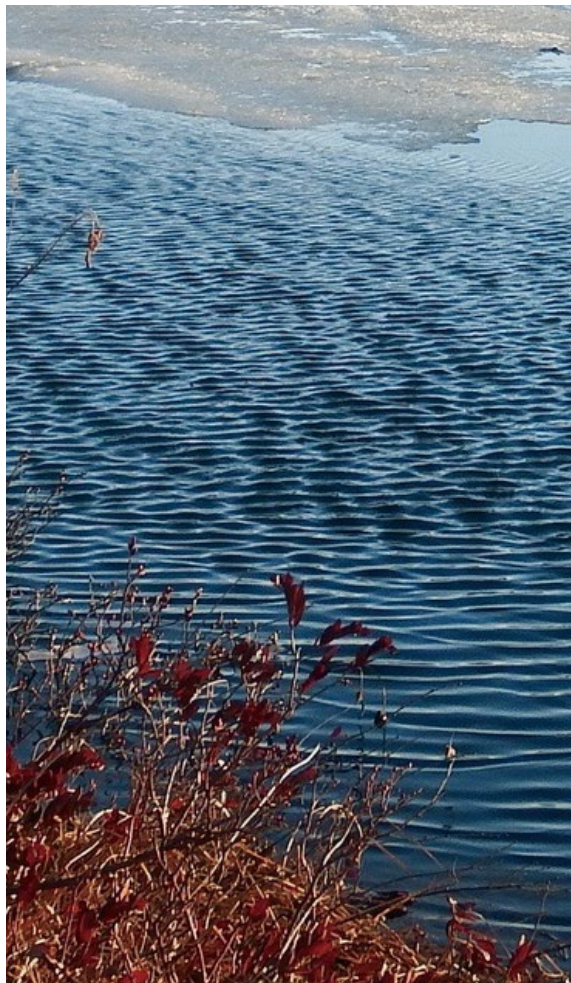





T85201 / T85204 / T85205 / T85206 Ashlar



T85202 / T85204 Ashlar





T85201 / T85202 / T85203 **Herringbone**



T85201 / T85202 / T85205 **Ashlar**









T85206 Herringbone




T85201 Herringbone





T85201 Cloud



T85202 Fossil



T85203 Shadow



T85204 Stone



T85205 Olive



T85206 Oyster

<b>Style</b>	T852 "Ripple"
<b>Construction</b>	Hi / Mid / Lo Loop
<b>Pile Fibre</b>	nexlon™ Premium Solution Dyed Nylon featured with aircell
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	1 / 12G
<b>Pile Height</b>	6.0 / 5.0 / 3.5mm
<b>Total Thickness</b>	7.0mm(±0.5mm)
<b>Tile size</b>	250mm x 1000mm
<b>Total Weight</b>	Approx. 4900g / m <sup>2</sup>
<b>Secondary Back</b>	TUNTEX Duraback
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAINSHIELD™</b>
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOILGUARD™</b>

---

<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 KV.
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



