



# Reflection

T855

TUNTEX™

# Reflection

Reflection is everywhere and common in natural scenes. Like a mirror, water reflects the trees and sky clearly, freezes the moment in time into an image created by nature. People are invited to enjoy the beautiful scenery from a different perspective.






T85501 / T85502 / T85503 Ashlar

# Balanced


Reflections of the landscape in still water are almost perfect symmetry. Looking at the surface of calm water where the reflection perfectly balances two worlds. Between land and water, reality and illusion, reflection creates a new discovery.

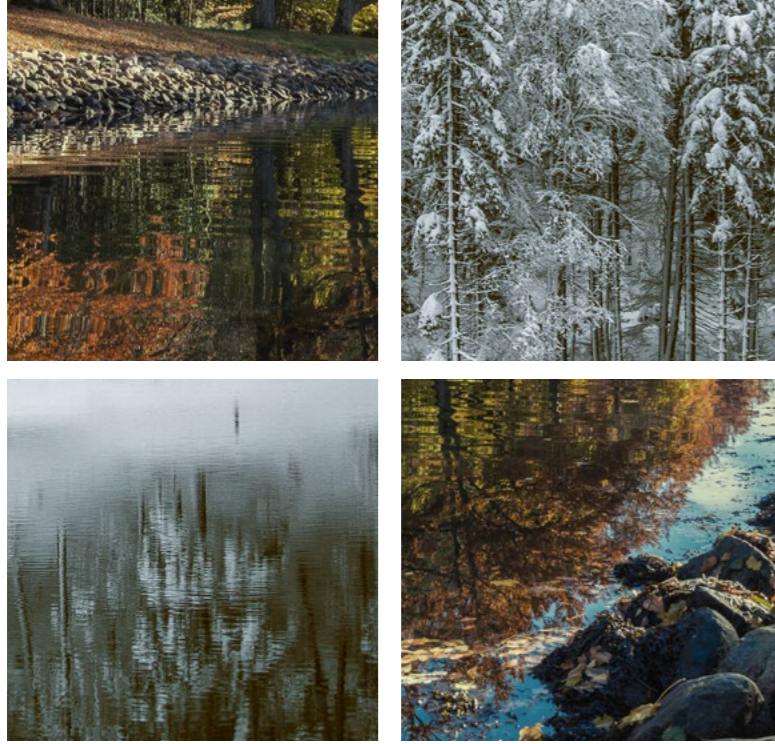

# Illusory

The reflection of trees becomes an abstract painting when the surface of water is broken by wind. T855 Reflection brings natural patterns inside the spaces. Like reflections of the tree, this product gives the space a natural look and sense of imagination.



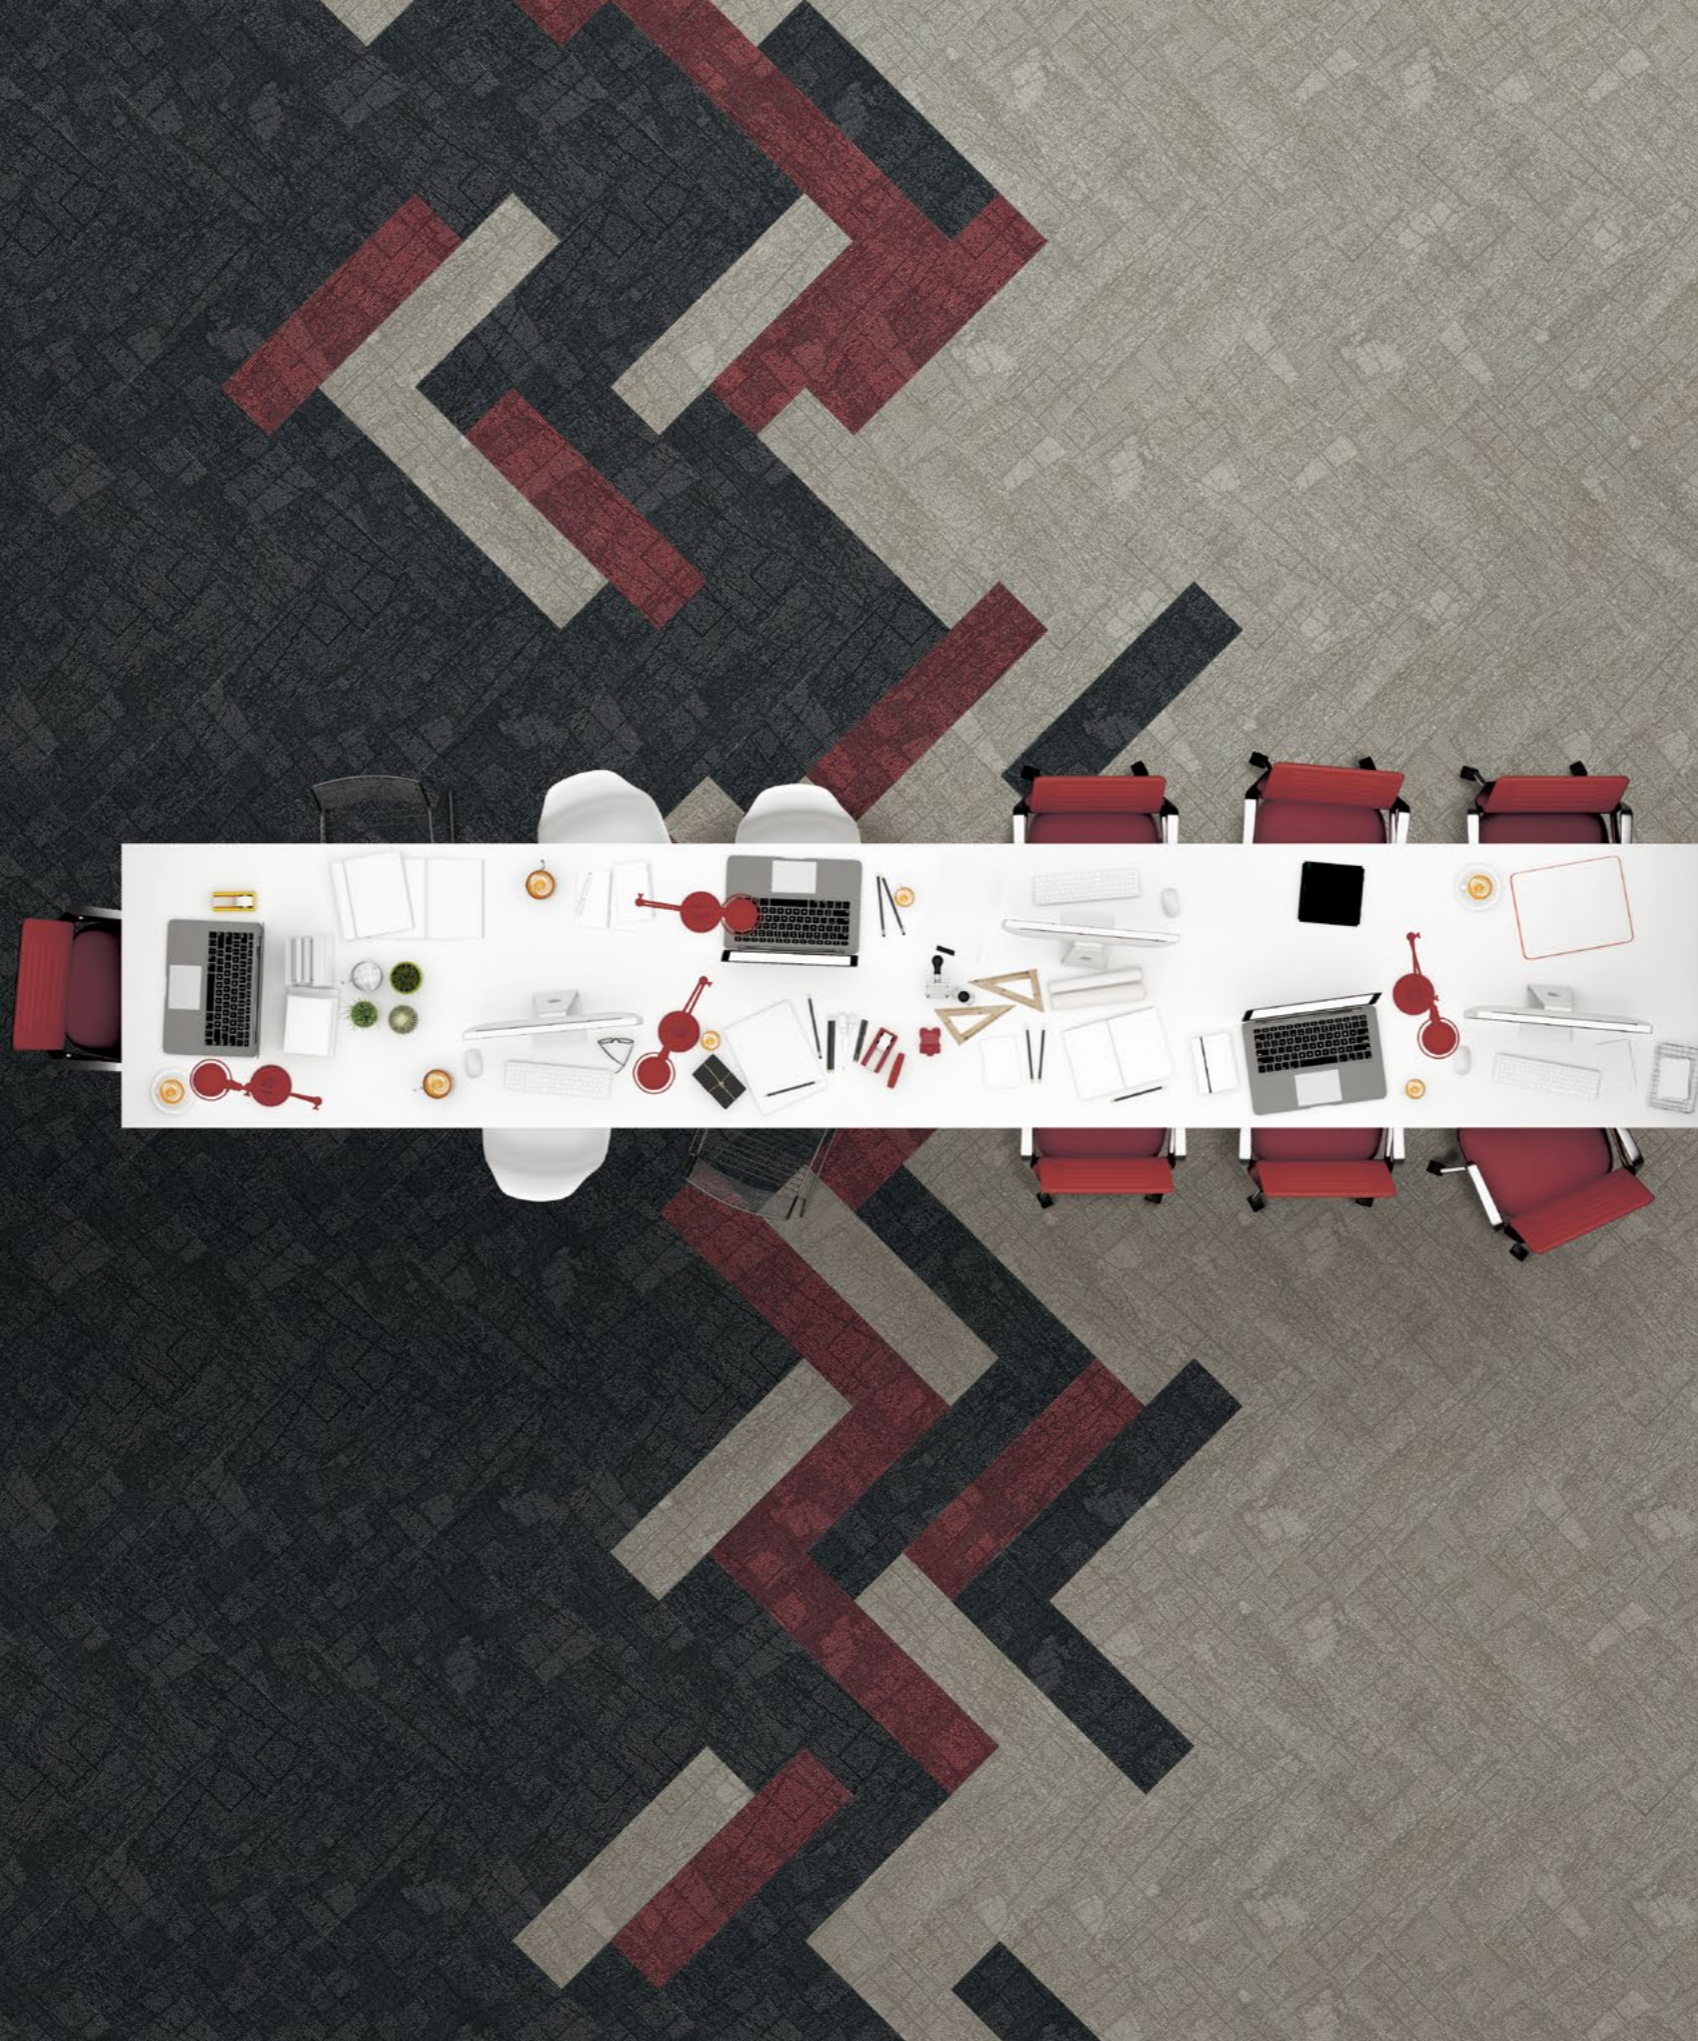




T85501 Ashlar




T85501 / T85503 Ashlar

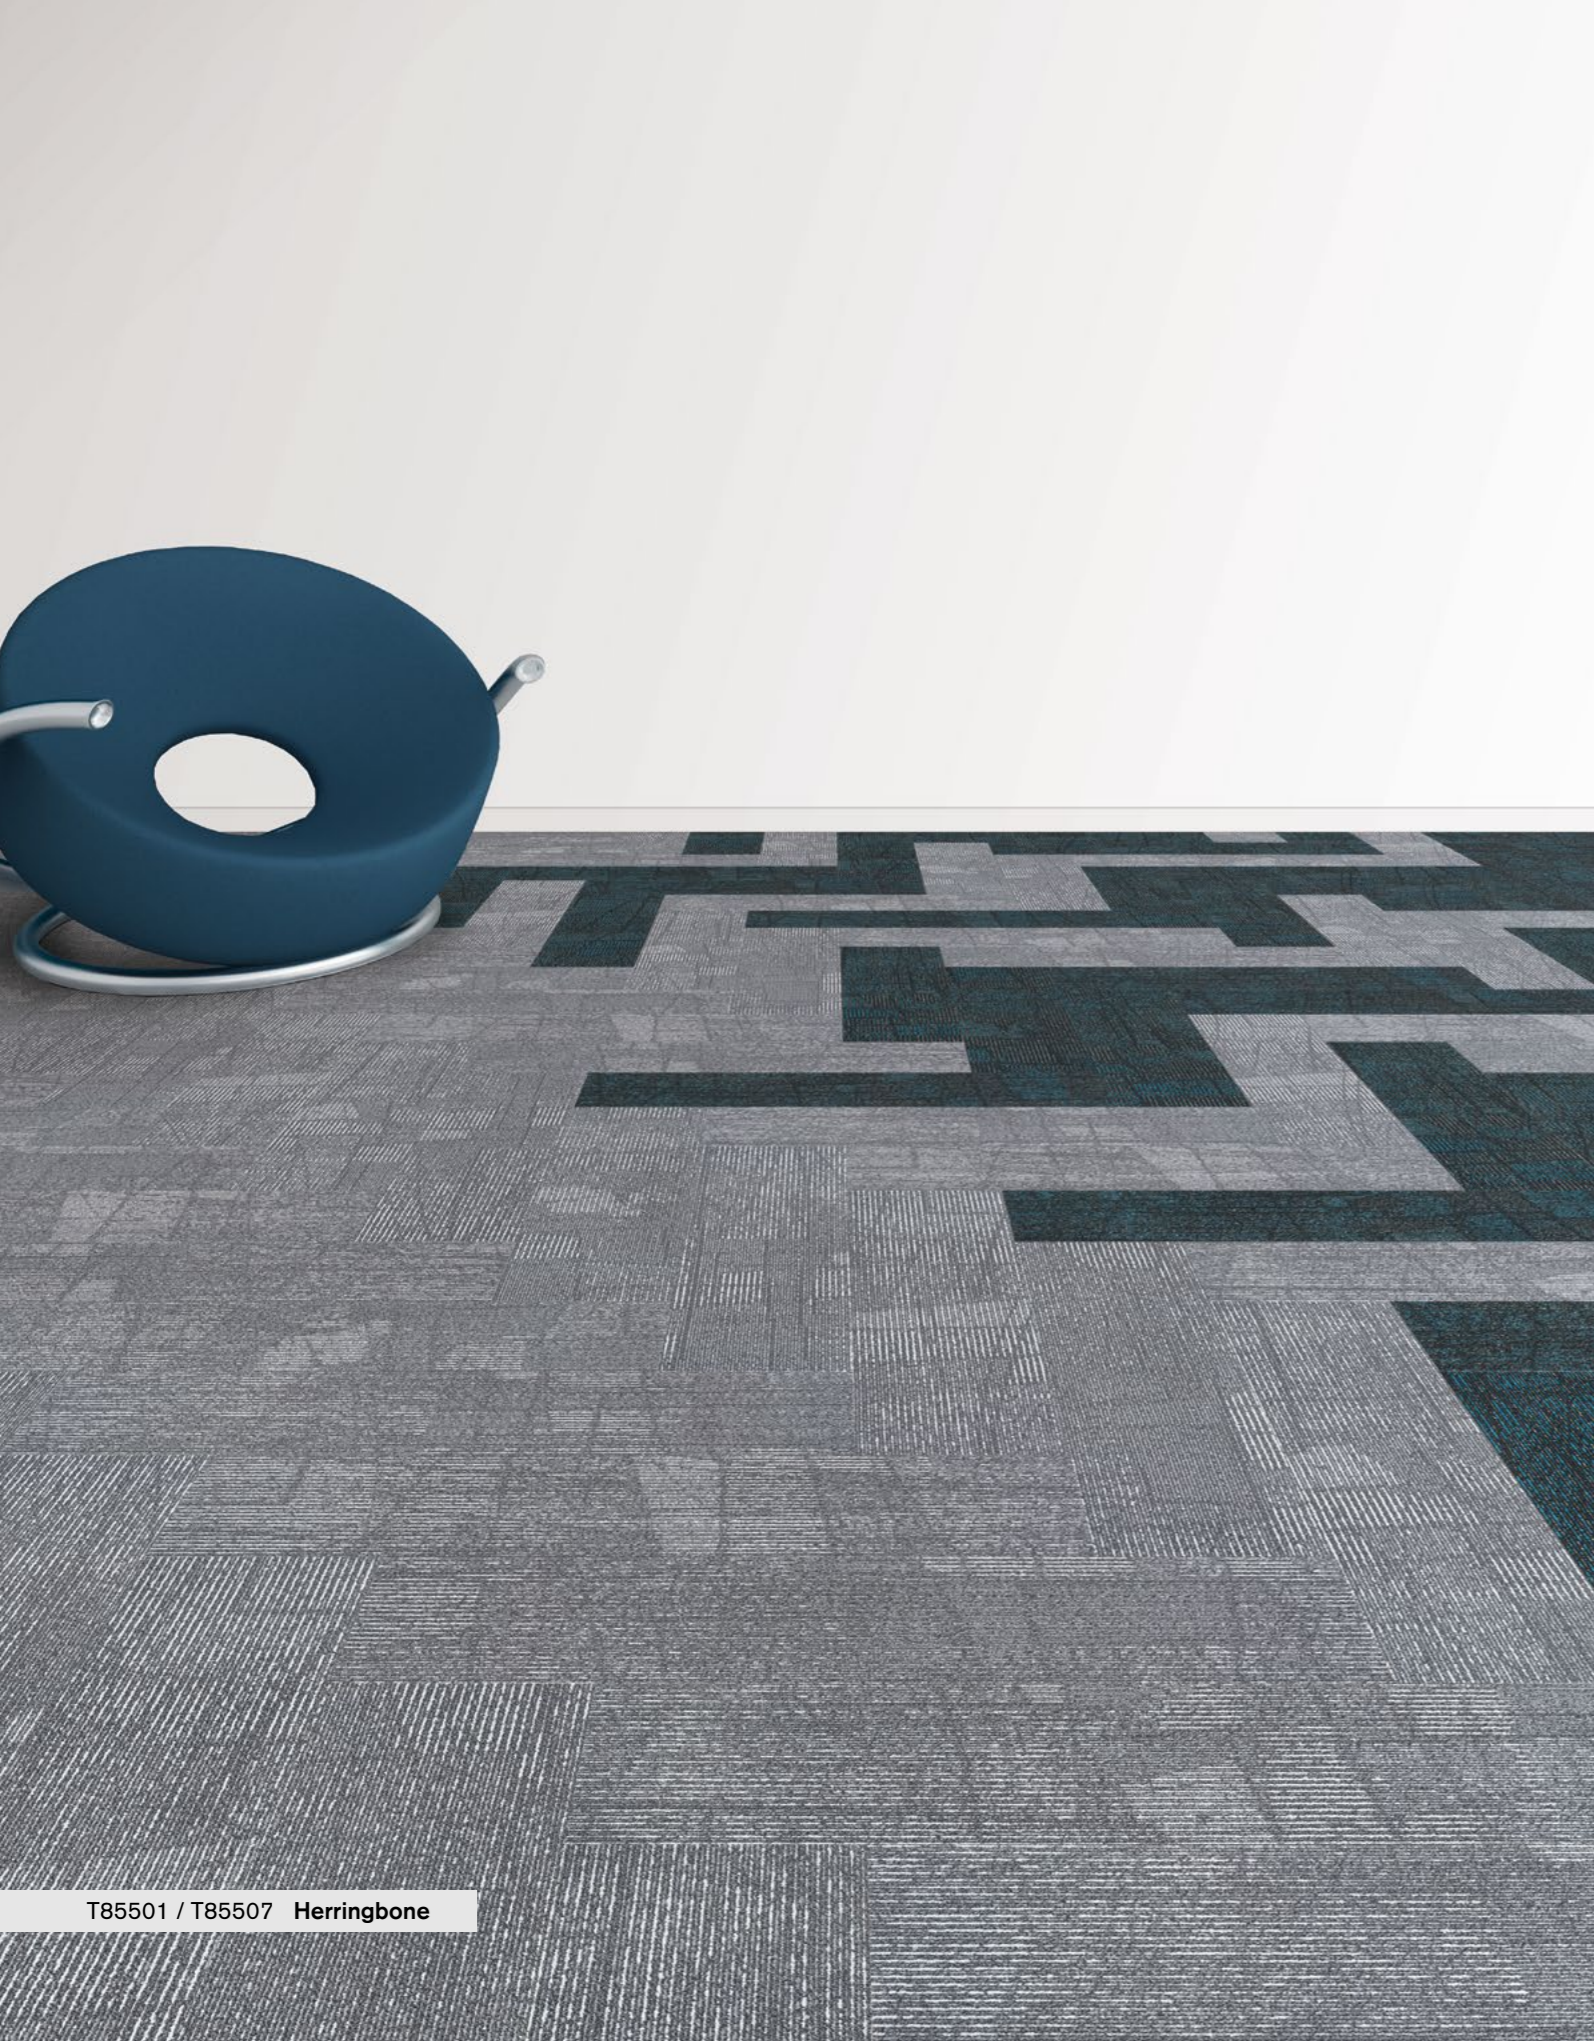

T85501 / T85507 Herringbone



T85501 Dove



T85502 Shadow




T85503 Charcoal



T85504 Hazel




T85505 Chocolate



T85506 Olive



T85507 Peacock



T85508 Brick

<b>Style</b>	T855 "Reflection"
<b>Construction</b>	Hi / Mid / Lo Loop
<b>Pile Fibre</b>	nexlon™ Premium Solution Dyed Nylon featured with aircell
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	1 / 12G
<b>Pile Height</b>	5.5 / 5.0 / 3.5mm
<b>Total Thickness</b>	7.5mm(±0.5mm)
<b>Tile size</b>	250mm x 1000mm
<b>Total Weight</b>	Approx. 4950g / m <sup>2</sup>
<b>Secondary Back</b>	TUNTEX Duraback
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAIN</b> SHIELD™
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOIL</b> GUARD™

---

<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 KV.
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



