






Mosaic
T856

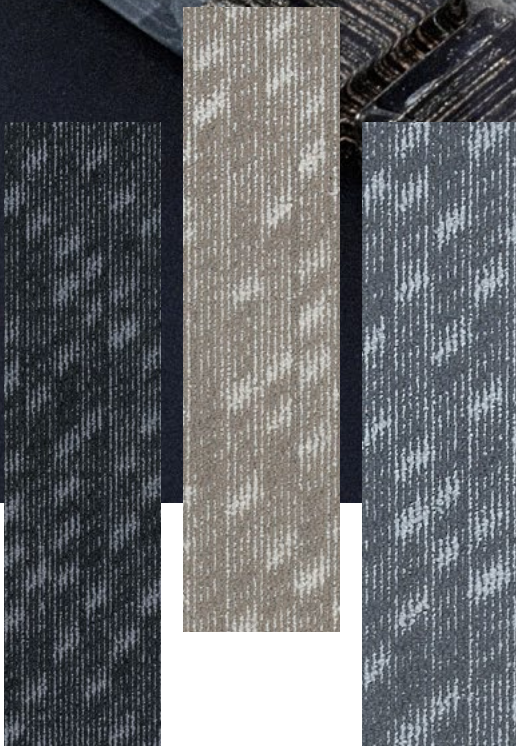

TUNTEX™

Ancient

Mosaic is a piece of art or image typically made from assembling small pieces of colored glasses or stones; it has a long history, dating back to the 3rd millennium BC. Mosaics are often used as interior decoration on walls, windows, and ceilings.

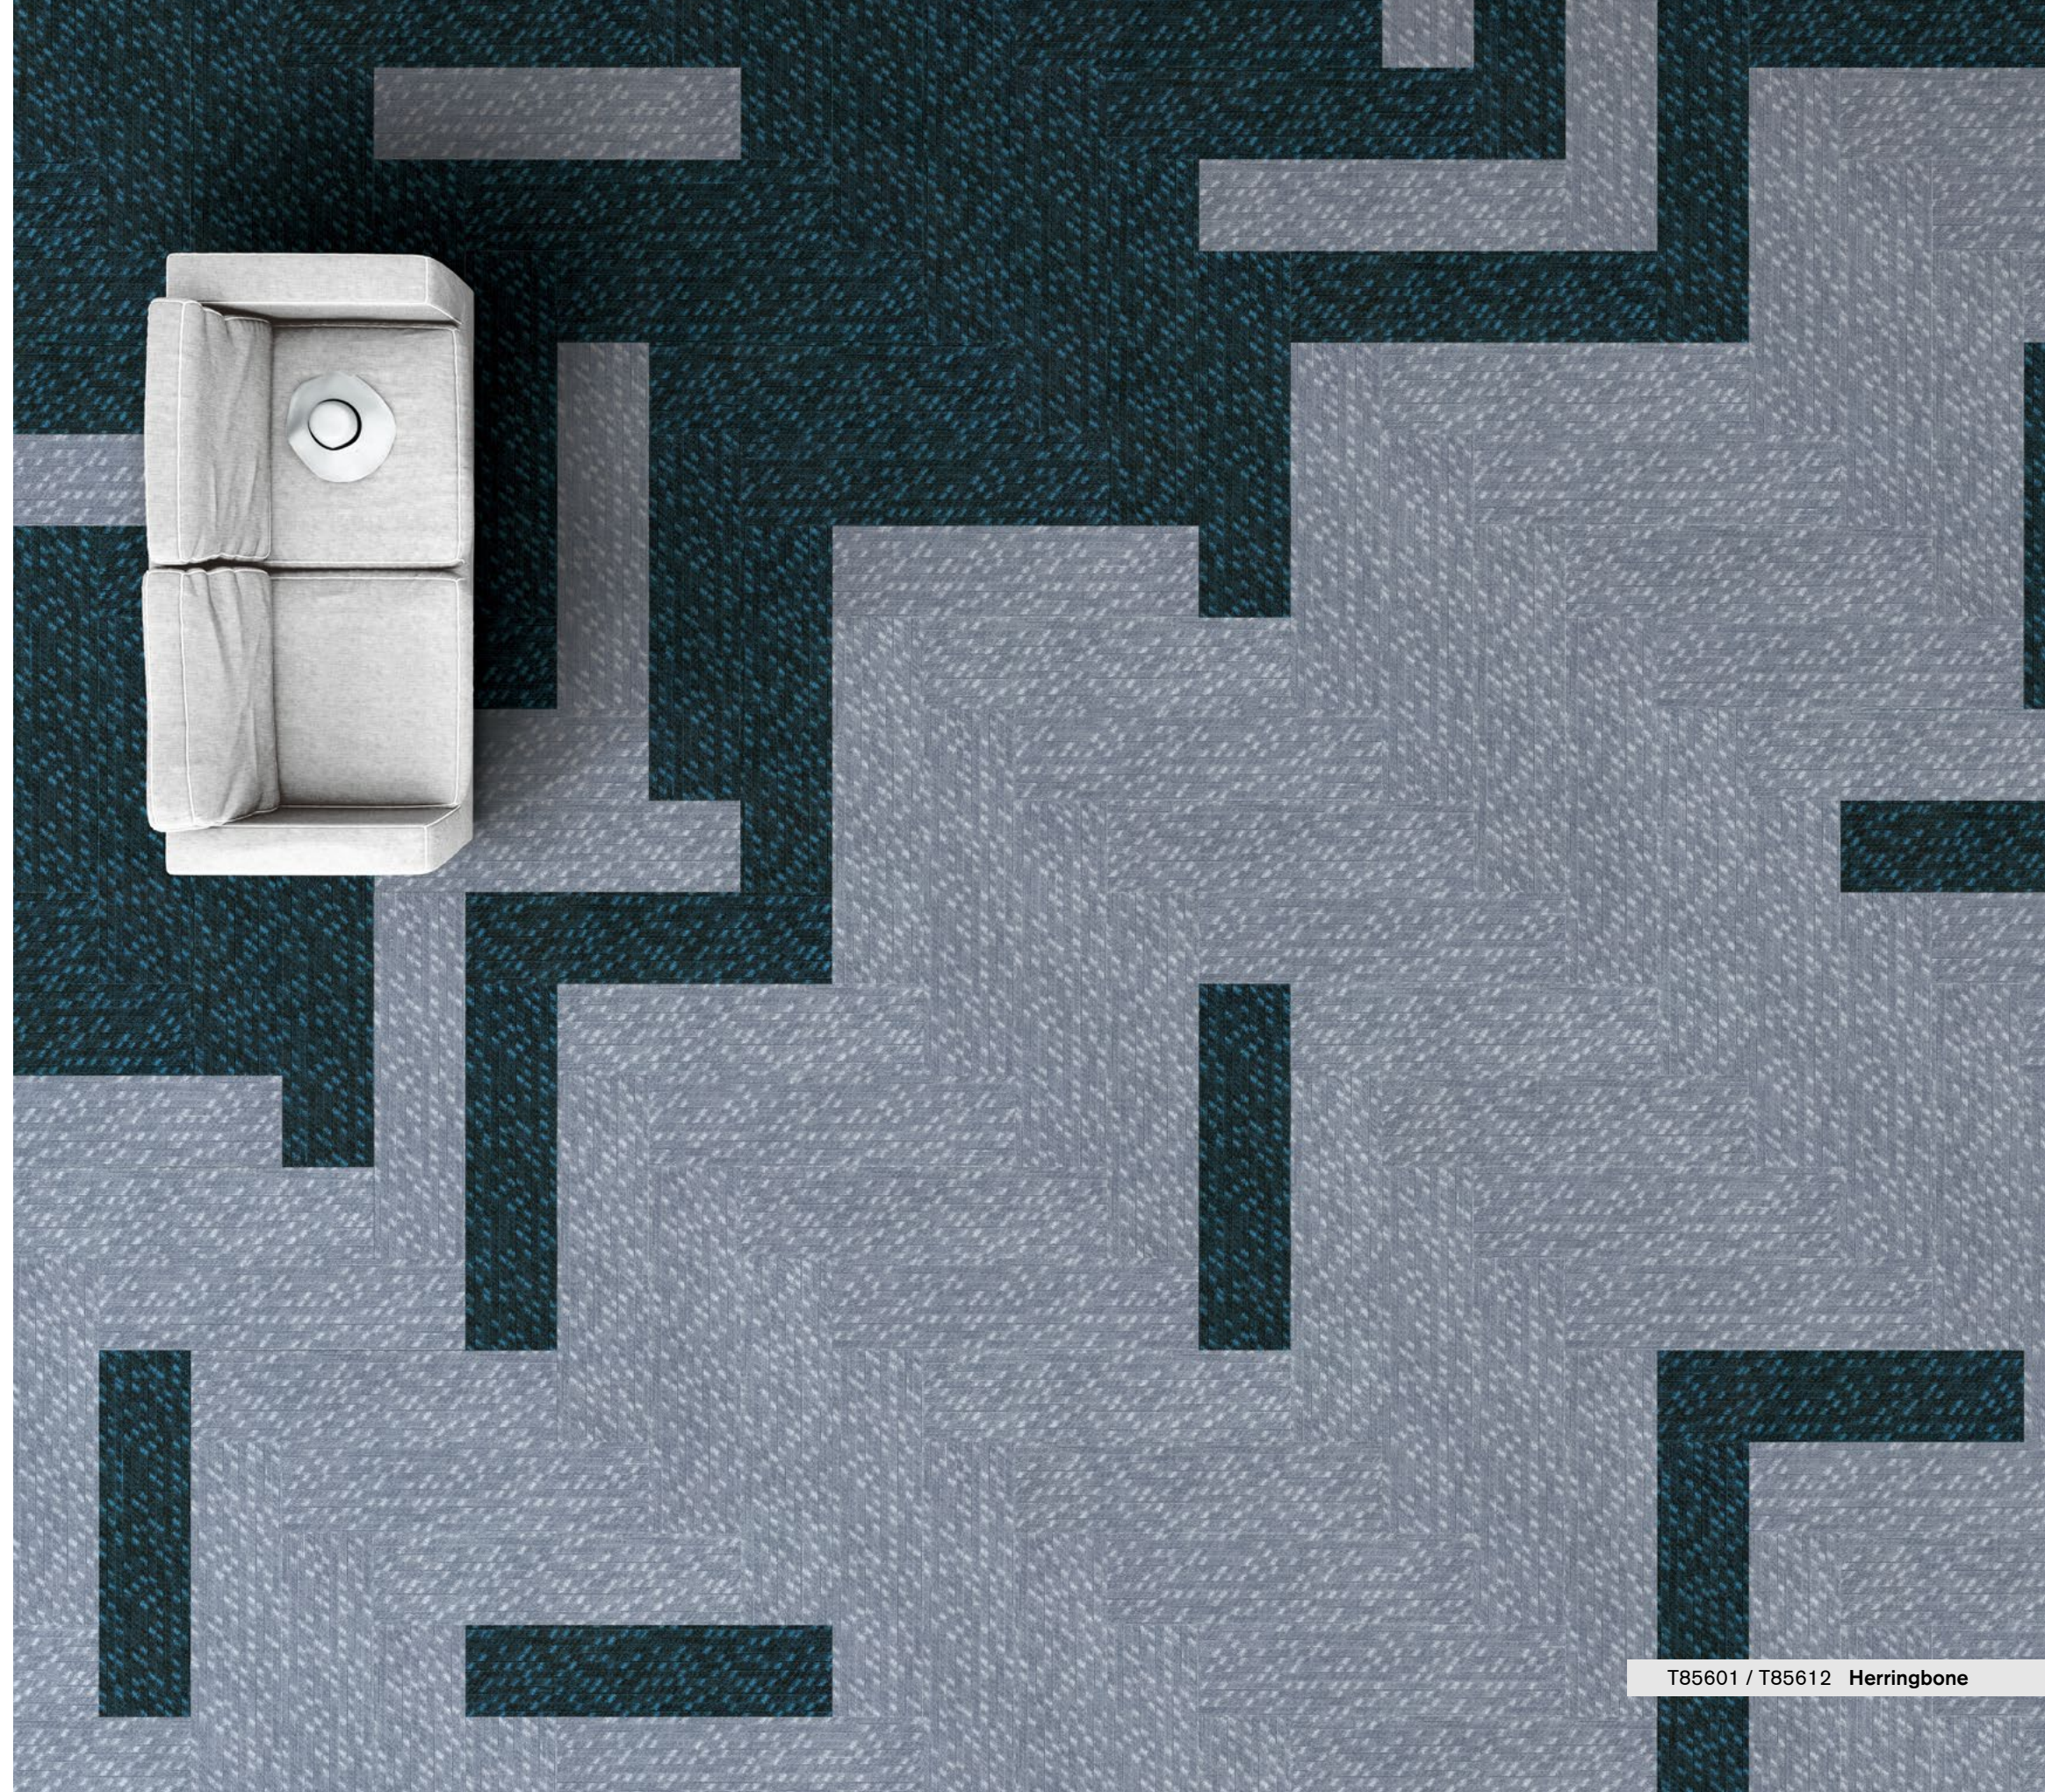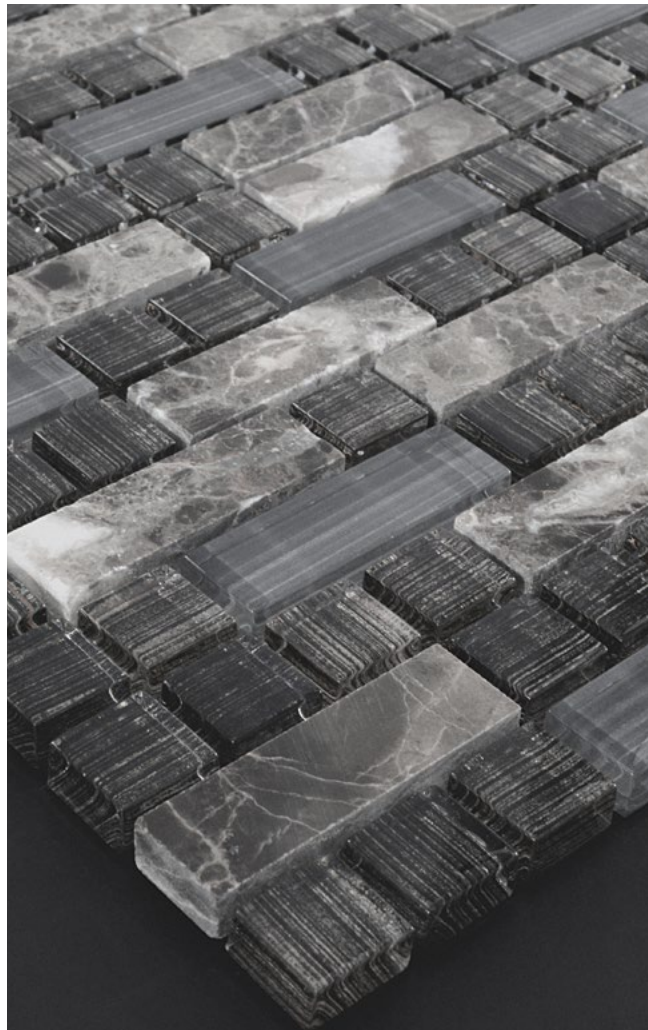




T85605 / T85606 / T85609 / T85610 Herringbone

Symbolic

Tuntex interprets Mosaic as a spiritual symbol of life, symbolising the various patterns in which everyone lives through from choosing different paths, thus, reminding everyone that there is no limit as to what one wants to do in his or her life.

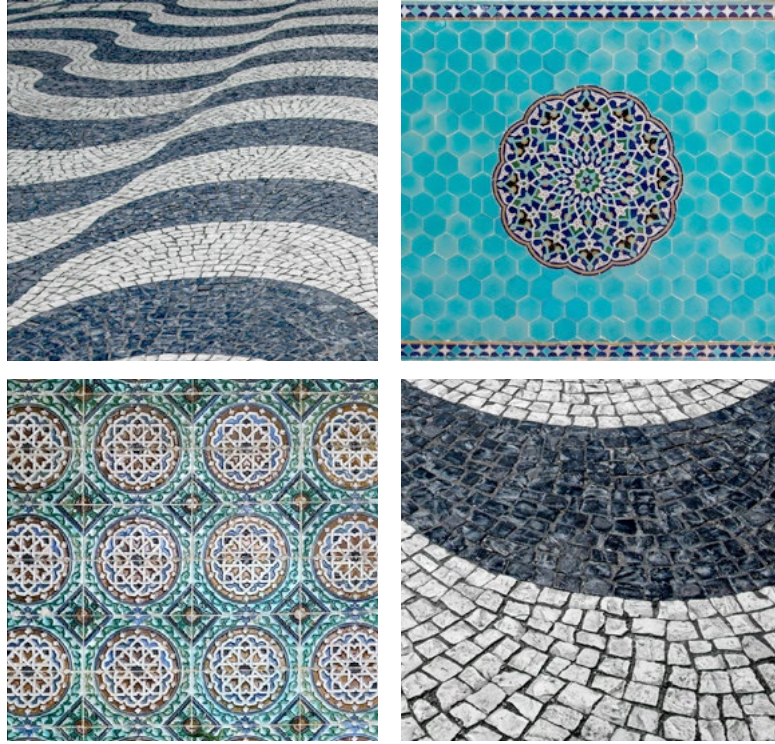

Nostalgic

By recreating mosaics as a carpet design, Tuntex brings back the ancient art form in an innovative, modern way. T856 Mosaic is designed to create indoor spaces that reflect art history while keeping the interior design contemporary and simple. Old memory, Old days, Good times.





T85606 / T85610 Ashlar



T85604 / T85608 Ashlar





T85601 / T85602 Herringbone




T85602 / T85613 Ashlar




T85601 / T85604 Ashlar



T85601 Coin



T85602 Fossil



T85603 Porpoise




T85604 Shadow



T85605 Cloud



T85606 Ash



T85607 Iron



T85608 Grape



T85609 Jam



T85610 Tawny



T85611 Shamrock



T85612 Aegean



T85613 Ocean

Style	T856 "Mosaic"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	6.0 / 5.5 / 3.5mm
Total Thickness	7.3mm(±0.5mm)
Tile size	250mm x 1000mm
Total Weight	Approx. 4850g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAINSHIELD™
Soil Resistance	Soil Guard Treatment: SOILGUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



