



**Time T673  
& Tide T873**



**TUNTEX™**





# TIME





Time and tide wait for no man.  
Listening to the lapping of the waves and seeing the tides being high or low,  
we feel the magic and power of time.

# TIDE



# Time & Tide


Time & Tide Collection is dedicated to the greatest of time. Based on neutral colors that symbolize eternity, the gradient colors simulate the trail of time flowing.

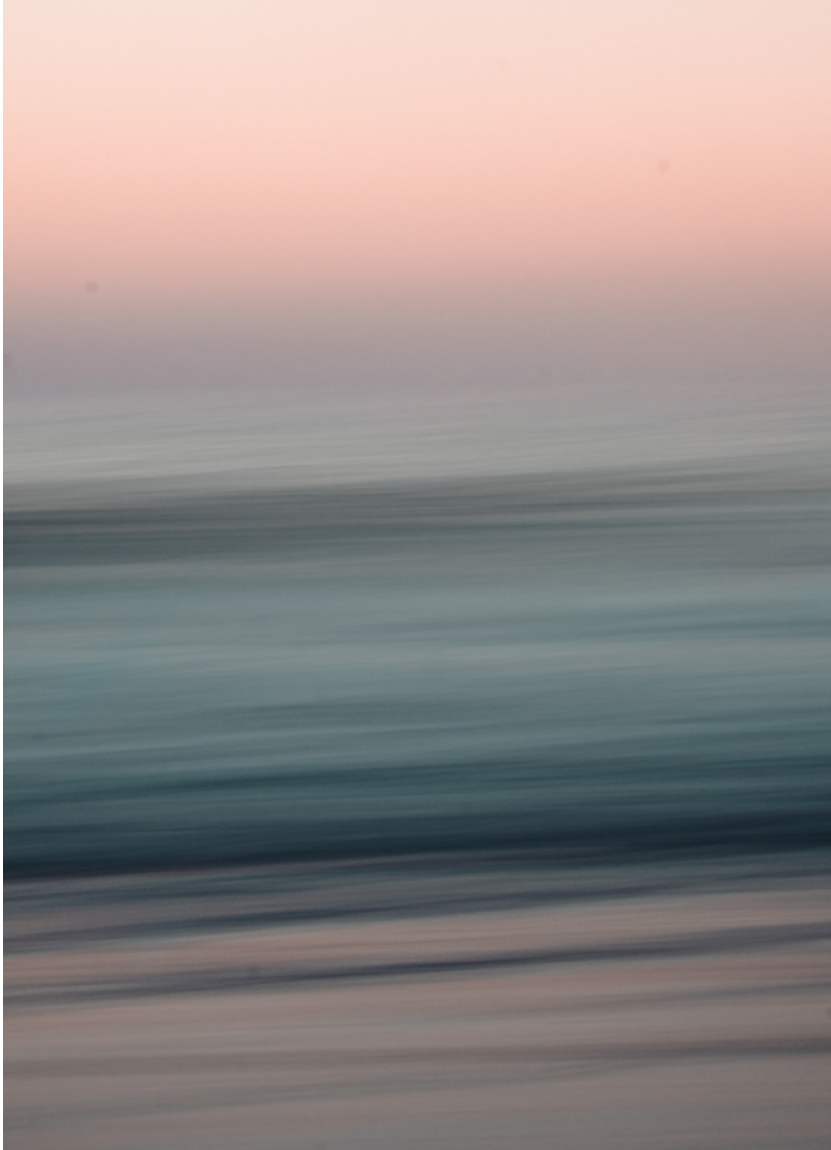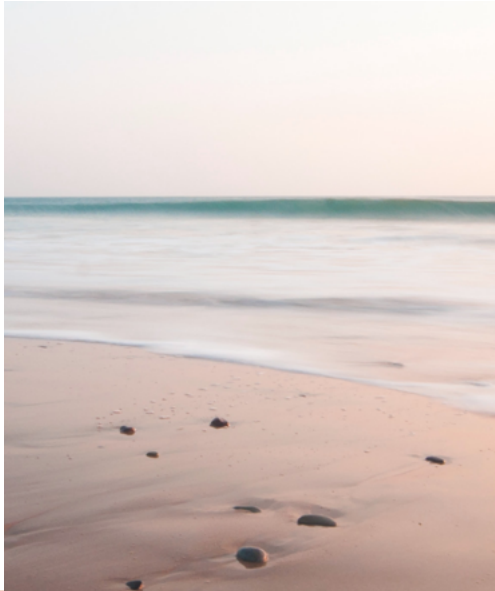

T873 Tide opens to a special cross pattern, while T673 Time conveys a positive meaning with bright accents. The simple and modern design accommodates a variety of environments including commercial, hospitality, and public spaces.





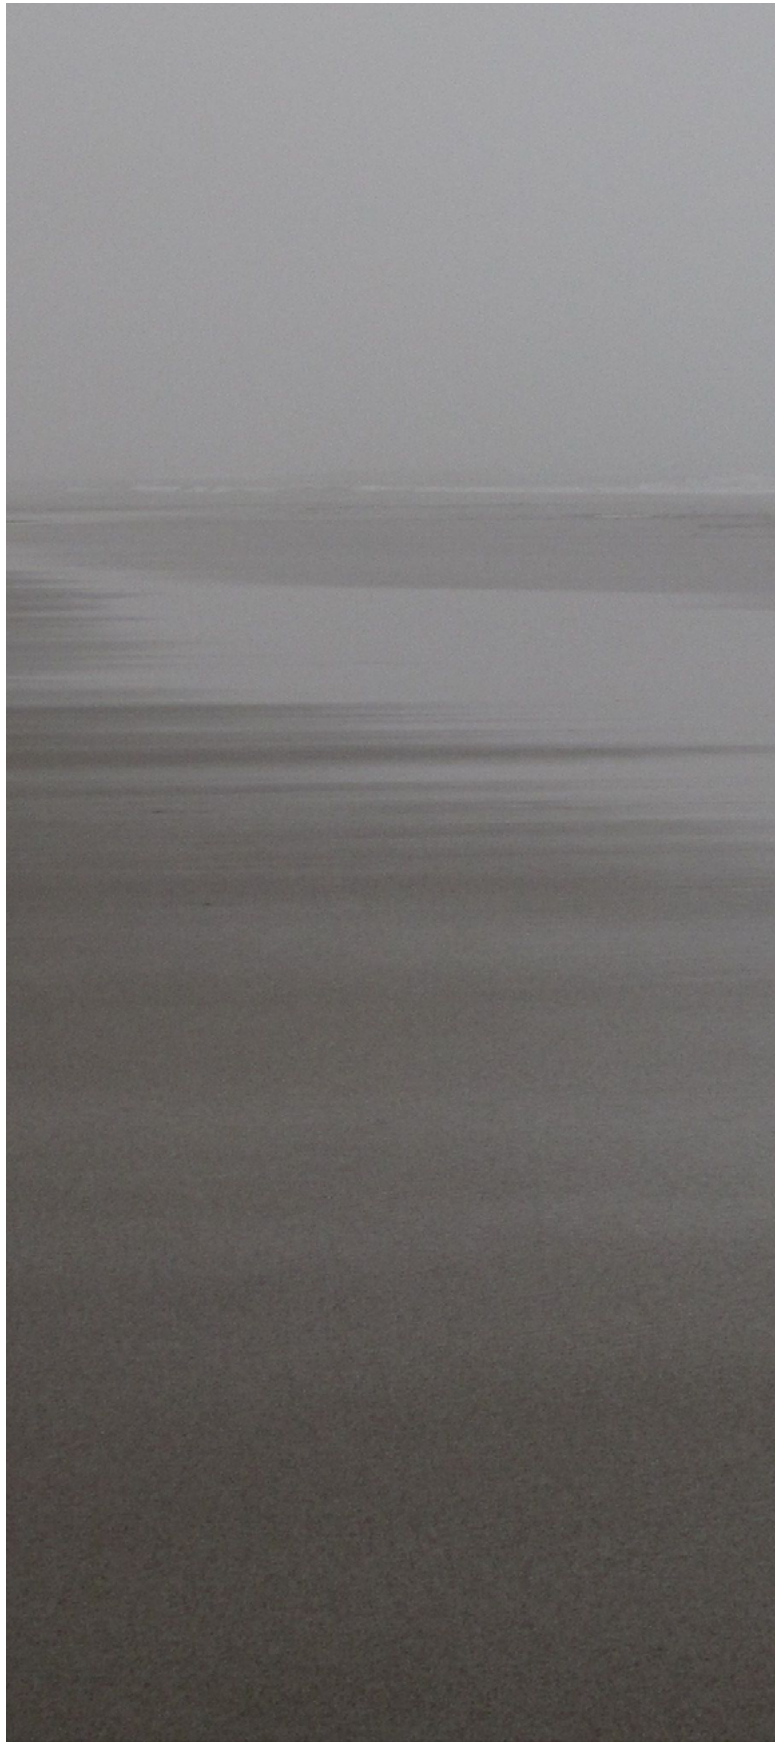





T67320 / T67321 Quarter-Turn



T67330 / T67331 / T873S02 / T873S03





T67310 Quarter-Turn



T67311 Quarter-Turn





T67310 / T67320 Brick



T67330 / T67331 / T873S03 / T873L03





T67320 / T67330 Brick



T873L01 / T873L03 Ashlar






T873L01 Cloud Cross




T873S01 Cloud



T873L02 Fossil Cross



T873S02 Fossil



T873L03 Iron Cross



T873S03 Iron

<b>Style</b>	T873 "Tide"
<b>Construction</b>	Multi Hi / Lo Loop
<b>Pile Fibre</b>	nexlon™ Premium Solution Dyed Nylon featured with aircell
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	1 / 10G
<b>Pile Height</b>	6.0 ~ 4.0mm
<b>Total Thickness</b>	6.7mm(±0.5mm)
<b>Tile size</b>	250mm x 1000mm
<b>Total Weight</b>	Approx. 4950g / m <sup>2</sup>
<b>Secondary Back</b>	TUNTEX Duraback
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAIN</b> SHIELD™
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOIL</b> GUARD™

<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 KV.
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.





