




Snowflakes


T896

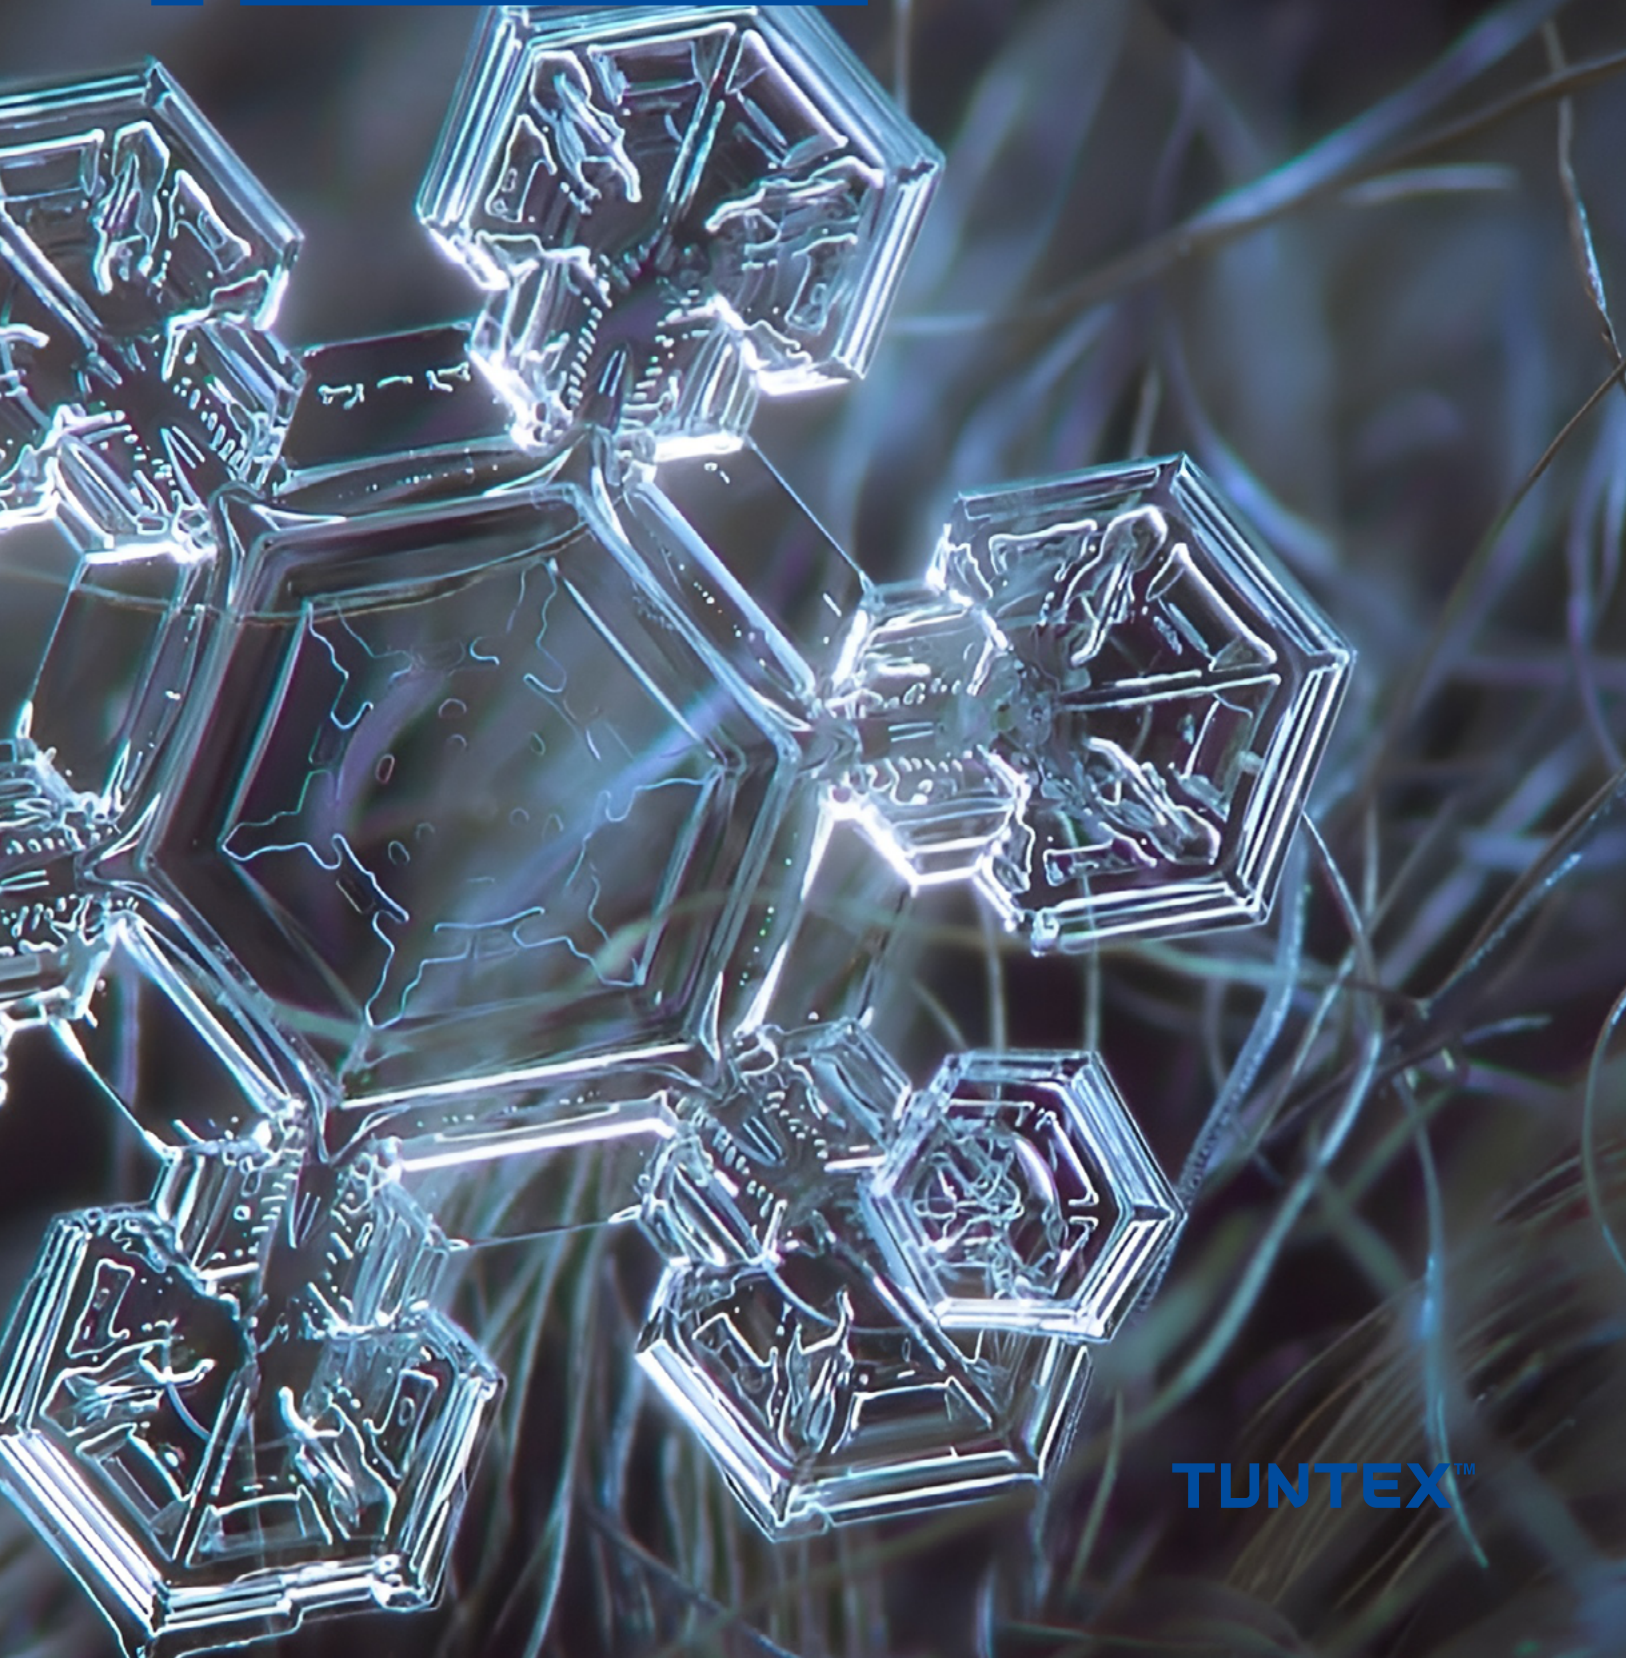

TUNTEX™

Geometry in Nature

Geometry in Nature collection explores the power and mystery of the earth. T861 Bumblebees, T871 Ice Shards, and T896 Snowflakes interpret the iconic shapes that show up in nature.

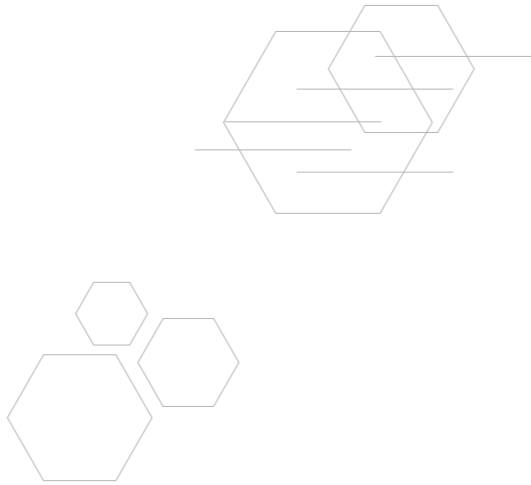

T896 Snowflakes takes the name of snowflake and mimics its hexagon pattern. Neutral colors highlight the distinctive and pure atmosphere. Shapes change and combine in a wide range which evokes more charms.







T89604 / T89605 Ashlar



T89601 / T89603 Ashlar



T89604 / T89608 Ashlar



T89604 / T89606 Ashlar



T89601 Tan



T89602 Hazel wood



T89603 Sand



T89604 Coin



T89605 Anchor



T89606 Shadow



T89608 Aegean



T89609 Spruce

Style	T896 "Snowflakes"
Construction	Hi / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	6.0 / 3.0mm
Total Thickness	7.5mm(±0.5mm)
Tile size	250mm x 1000mm
Total Weight	Approx. 5050g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



