

The background of the entire page is a traditional Japanese ink wash painting (suiboku-ga). It depicts a serene landscape with bamboo stalks in the foreground, blossoms (likely cherry blossoms) on branches in the upper corners, and misty mountains in the distance. The brushwork is expressive, with varying shades of ink and wash creating a sense of depth and atmosphere.

**Base T710G**  
**Bamboo T711G**  
**Blossom T712G**

**TUNTEX™**



# Base Bamboo Blossom

T710G Base consist of a color palette that sets the tone for the rest of the design.

T711G Bamboo is inspired by the natural beauty of bamboo, which is reflected in the elegant pattern made in various colors.

T712G Blossom is inspired by the natural beauty of flower, which is reflected in the elegant pattern made in various colors.











T7103G Ashlar



T7102G / T711X21G / T711Y21G Ashlar









T7103G / T712X32G / T712Y32G Ashlar











T7104G / T711X45G / T711Y45G Brick



## T711G BAMBOO

full pattern








half pattern





## T712G BLOSSOM

full pattern

half pattern



## T710G BASE

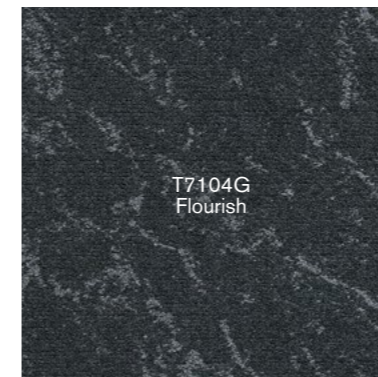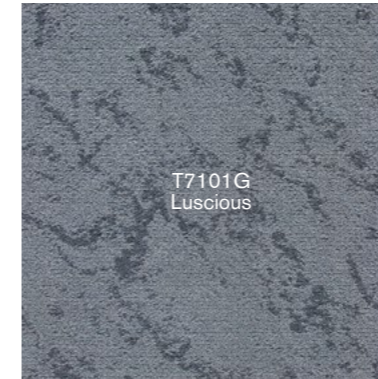

**Style** T710G "Base" / T711G "Bamboo" / T712G "Blossom"

**Construction** Multi Hi / Lo Loop

**Pile Fibre** nexlon™ Premium Solution Dyed Nylon

**Dye Method** Solution Dyed

**Gauge** 1 / 10G

**Pile Height** 6.0 - 4.0mm

**Total Thickness** 9.0 - 9.2mm(±0.5mm)

**Tile size** 500mm x 500mm

**Total Weight** 5550g - 5600g / m<sup>2</sup>

**Secondary Back** TUNTEX Duraback

**Stain Resistance** Stainshield Treatment: **STAINSHIELD™**

**Soil Resistance** Soil Guard Treatment: **SOILGUARD™**

**Odor Reducer** Ecofresh Treatment: **ECOFRESH™**

**Anti-microbial** Microshield Treatment: **MICROSHIELD™**

**Wear Warranty** Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.

**Colour Fastness** 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

**Static Electricity** Permanent Lifetime Protection - less than 2.0 KV.

**Dimensional Stability** Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.

**Installation** Tackifier or Releasable adhesive Recommended.

**Sustainability** All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.





