

Vintage

The vintage style reminds us of preserved architecture, antique cars made in the early 19th century. "Vintage" also refers to high quality within the wine industry, as it reflects the year of the grape harvest, the water and weather they received, which gives the wine a particular identity and unique taste for that year.







Unique

The beauty of vintage comes from the uniqueness the era brings, similar to wine. Each vintage wine has a particular flavor fundamentally molded by the grapes harvested that year. "Vintage" describes something hard to replicate or mimic, unrepeatable over time.

All images are computer generated files and may not exactly represent actual installation appearance and tile seams.

Full tiles can be provided if required.





Timeless

There are styles that only get better over time. Timeless elements that, like vintage wine, age gracefully and even become more charming and appreciated over the decades. Tuntex's T716G Vintage collection is designed with organic patterns with a tie-dye effect, creating a sense of antiqueness that tells a story of history and memory, ensuring its long lasting presence.



















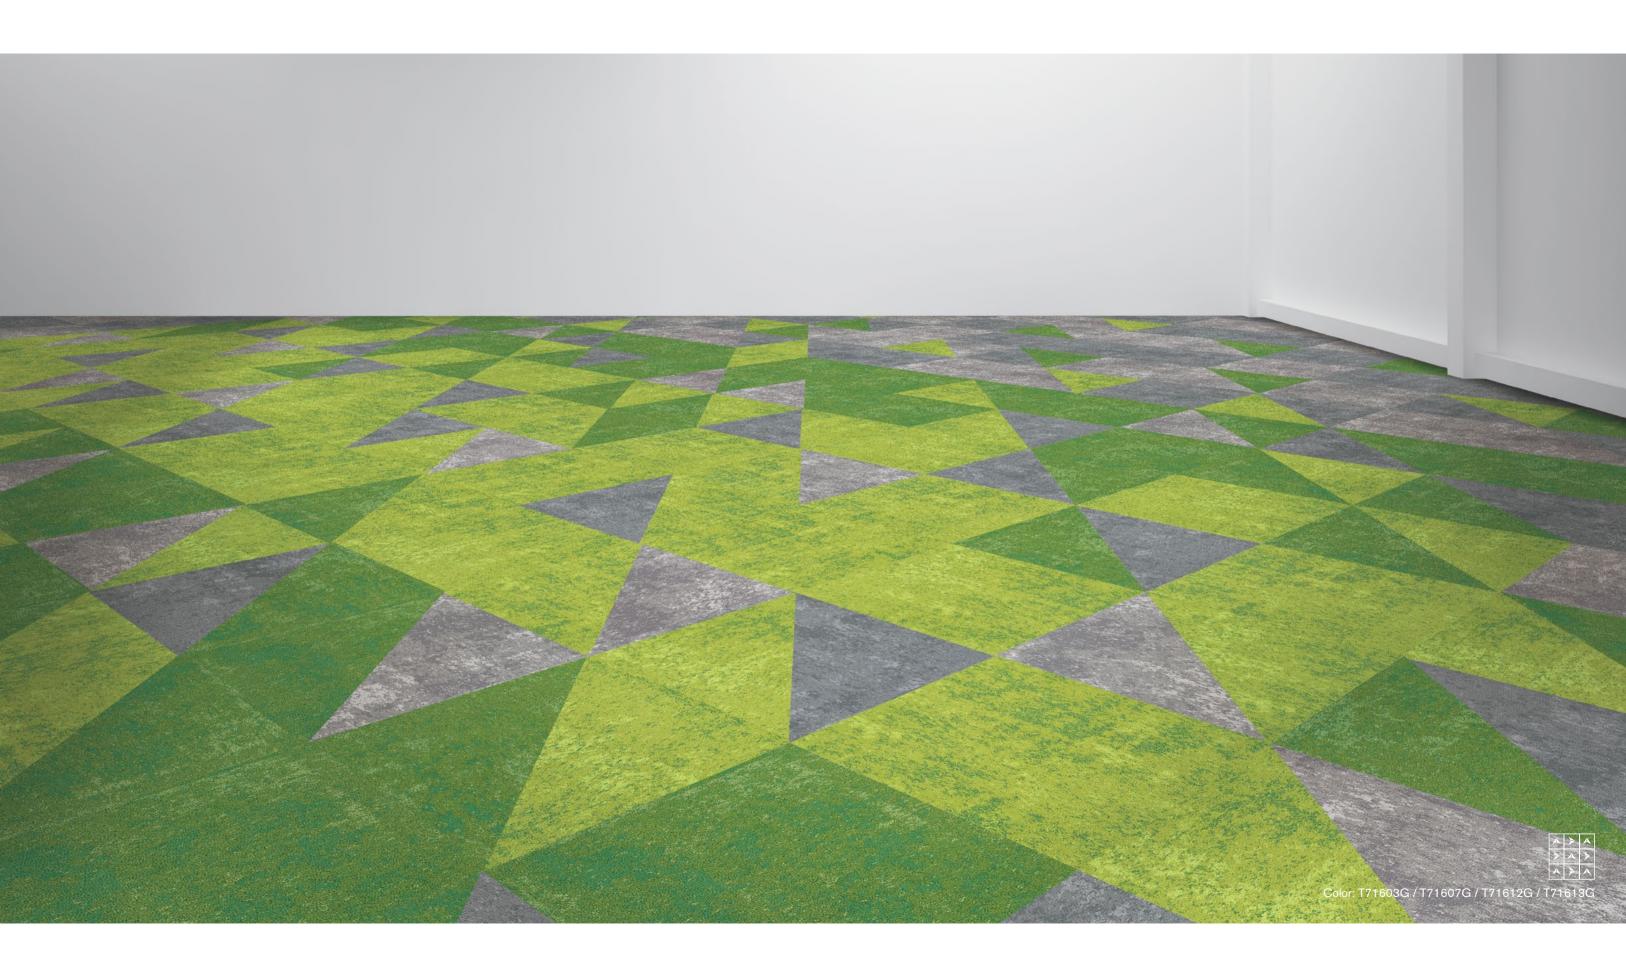



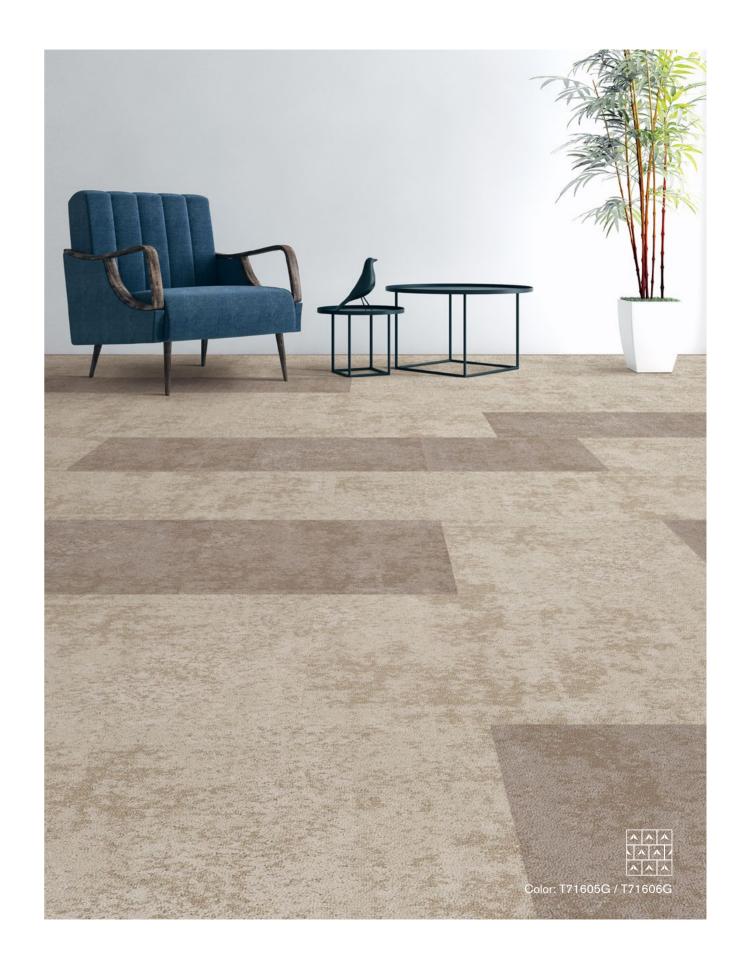










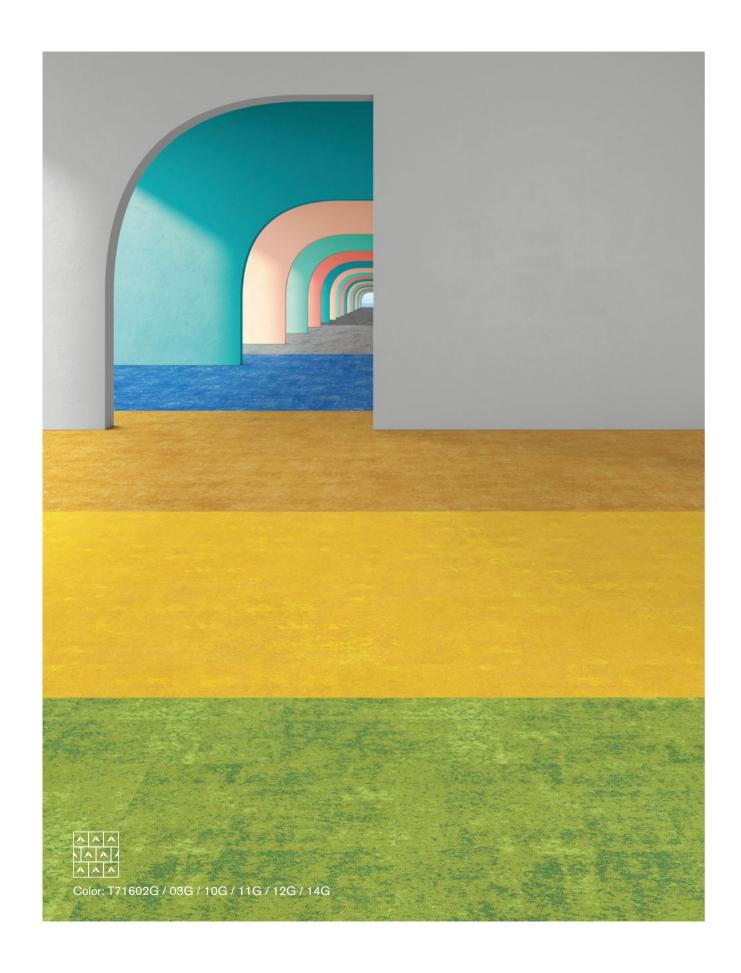







T71603G Hermitage



T71605G Chablis



T71607G Lafitte



T71610G Champagne T71611G Chardonnay



T71612G Napa



T71614G Marlborough T71615G Tuscany



T71616G Cabernet





T71602G Riesling



T71604G Reims



T71606G Toscana



T71608G Penfolds






T71613G Barossa





T71617G Shiraz



T71619G Bordeaux

Style T716G "Vintage"

Construction Multi Hi / Lo Loop

Universal Fiber Solution Dyed Nylon Pile Fibre

Dye Method Solution Dyed

Gauge 1 / 10G

Pile Height 6.0 - 3.5mm

Total Thickness 8.4mm(±0.5mm)

Tile size 500mm x 500mm

Total Weight Approx. 6300g / m²

RECYCLED TUNTEX Commercial Duraback Secondary Back

Wear Warranty Product is warranted not to lose more than 10% pile fibre

by weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

Static Electricity Permanent Lifetime Protection - less than 2.0 KV.

Stain Resistance Stainshield Treatment: STAINSHIELD™ **Soil Resistance** Soil Guard Treatment: SOILGUARD™

Odor Reducer Ecofresh Treatment: ECOFRESH"

Anti-microbial Microshield Treatment: MICROSHIELD™

Dimensional Stability Warranted not to change in size by more than 0.5 mm in

normal use. Will not dome or dish in normal use.

Installation Tackifier or Releasable adhesive Recommended.

Sustainability All yarns used are Solution dyed to minimise use of water

and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test. Static Propensity: ≤3.5 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

Passes EN 13501 European Fire Test Bfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.















