




WEAVE PLUS
T718G

TUNTEX™



TUNTEX™

All images are computer generated files and may not exactly represent actual installation appearance and tile seams. Full tiles can be provided if required.






Color: T71840G / T71841G





Color: T71810G / T71811G

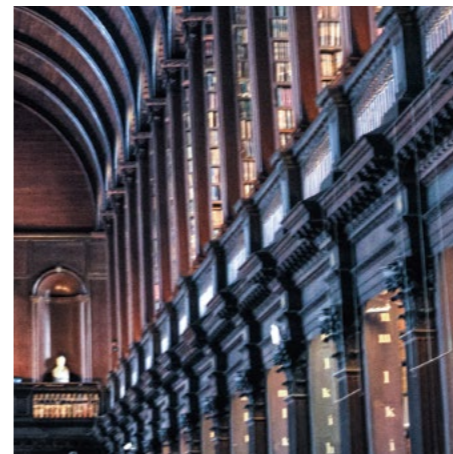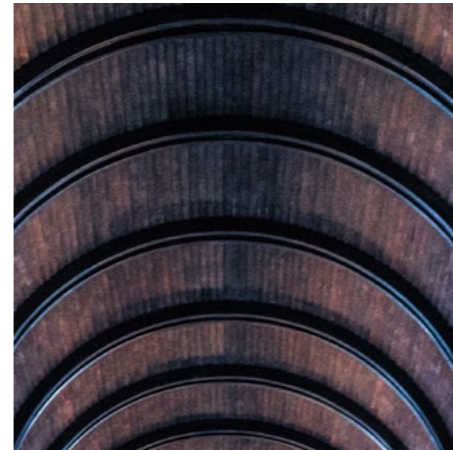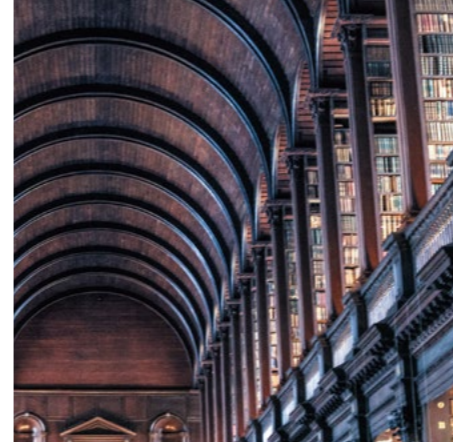

Color: T71840G / T71842G



Color: T71840G / T71843G



Color: T71810G / T71811G






Color: T71812G



Color: T71810G



Color: T71830G / T71833G

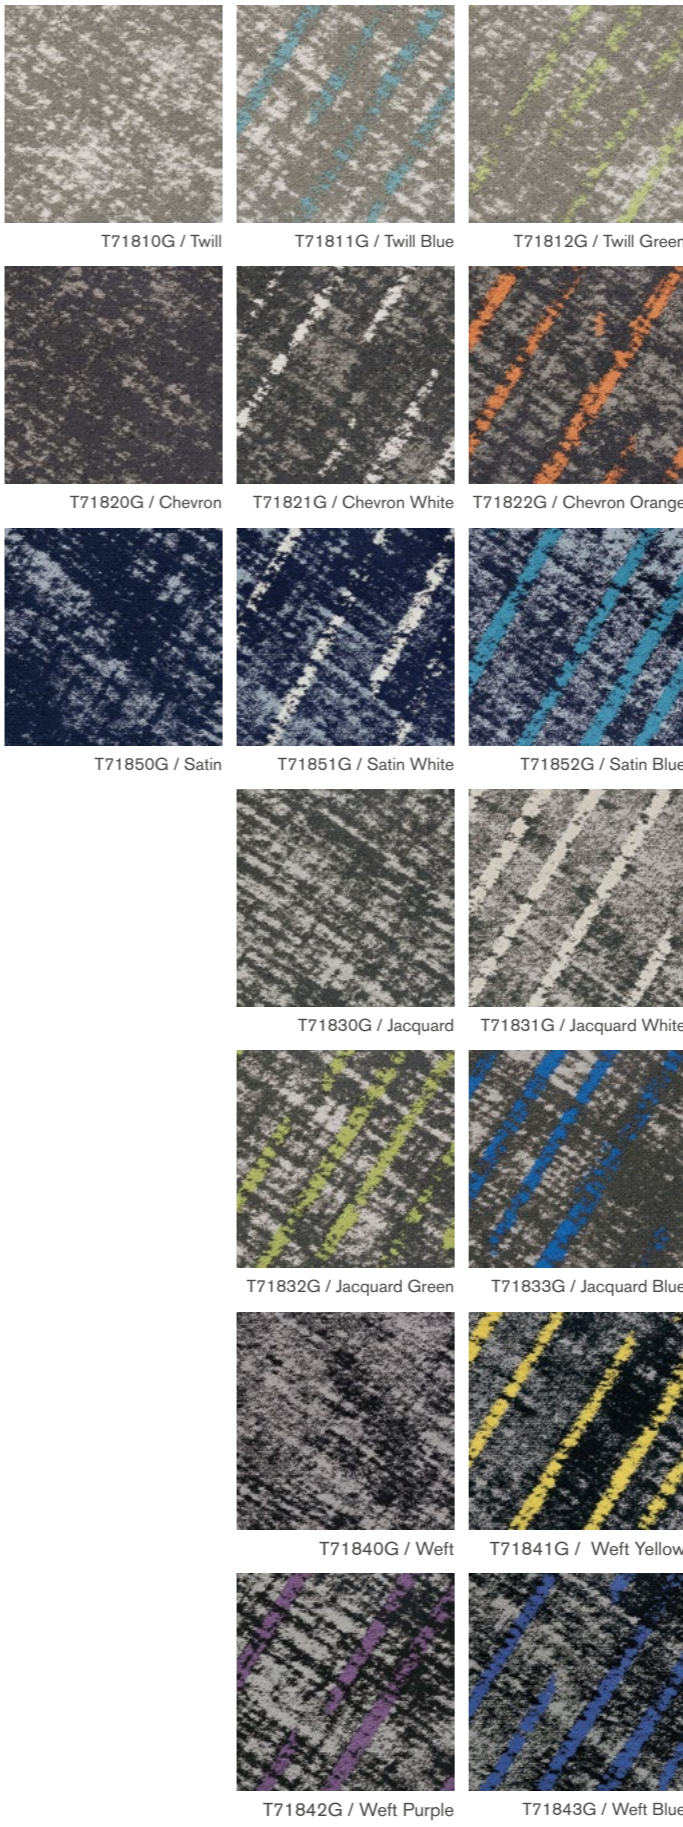

T71810G / Twill T71811G / Twill Blue T71812G / Twill Green
 T71820G / Chevron T71821G / Chevron White T71822G / Chevron Orange
 T71850G / Satin T71851G / Satin White T71852G / Satin Blue
 T71830G / Jacquard T71831G / Jacquard White
 T71832G / Jacquard Green T71833G / Jacquard Blue
 T71840G / Weft T71841G / Weft Yellow
 T71842G / Weft Purple T71843G / Weft Blue

Style T718G "Weave Plus"

Construction Multi Hi / Lo Loop

Pile Fibre nexlon™ Premium Solution Dyed Nylon with Stain & Soil Resist Technology

Dye Method Solution Dyed

Gauge 1 / 10G

Pile Height 5.5 - 3.0mm

Total Thickness 8.4mm(±0.5mm)

Tile size 500mm x 500mm

Total Weight Approx. 6200g / m²

Secondary Back RECYCLED TUNTEX Commercial Duraback

Wear Warranty Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 – Little or no change.

Static Electricity Permanent Lifetime Protection – less than 2.0 KV.

Stain Resistance Stainshield Treatment: **STAINSHIELD™**

Soil Resistance Soil Guard Treatment: **SOILGUARD™**

Odor Reducer Ecofresh Treatment: **ECOFRESH™**

Anti-microbial Microshield Treatment: **MICROSHIELD™**

Dimensional Stability Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.

Installation Tackifier or Releasable adhesive Recommended.

Sustainability All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

Recycled Content Certification by US GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
 Flammability: Passes (ASTM E648)
 Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
 Static Propensity: ≤3.5 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO9001 Quality Management System.

ISO14001 Environmental Management System.

Passes EN 13501 European Fire Test Bfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.



