



FREE FORM  
T719G  
**TUNTEX™**




# TUNTEX™

All images are computer generated files and may not exactly represent actual installation appearance and tile seams. Full tiles can be provided if required.



Color: T71906G



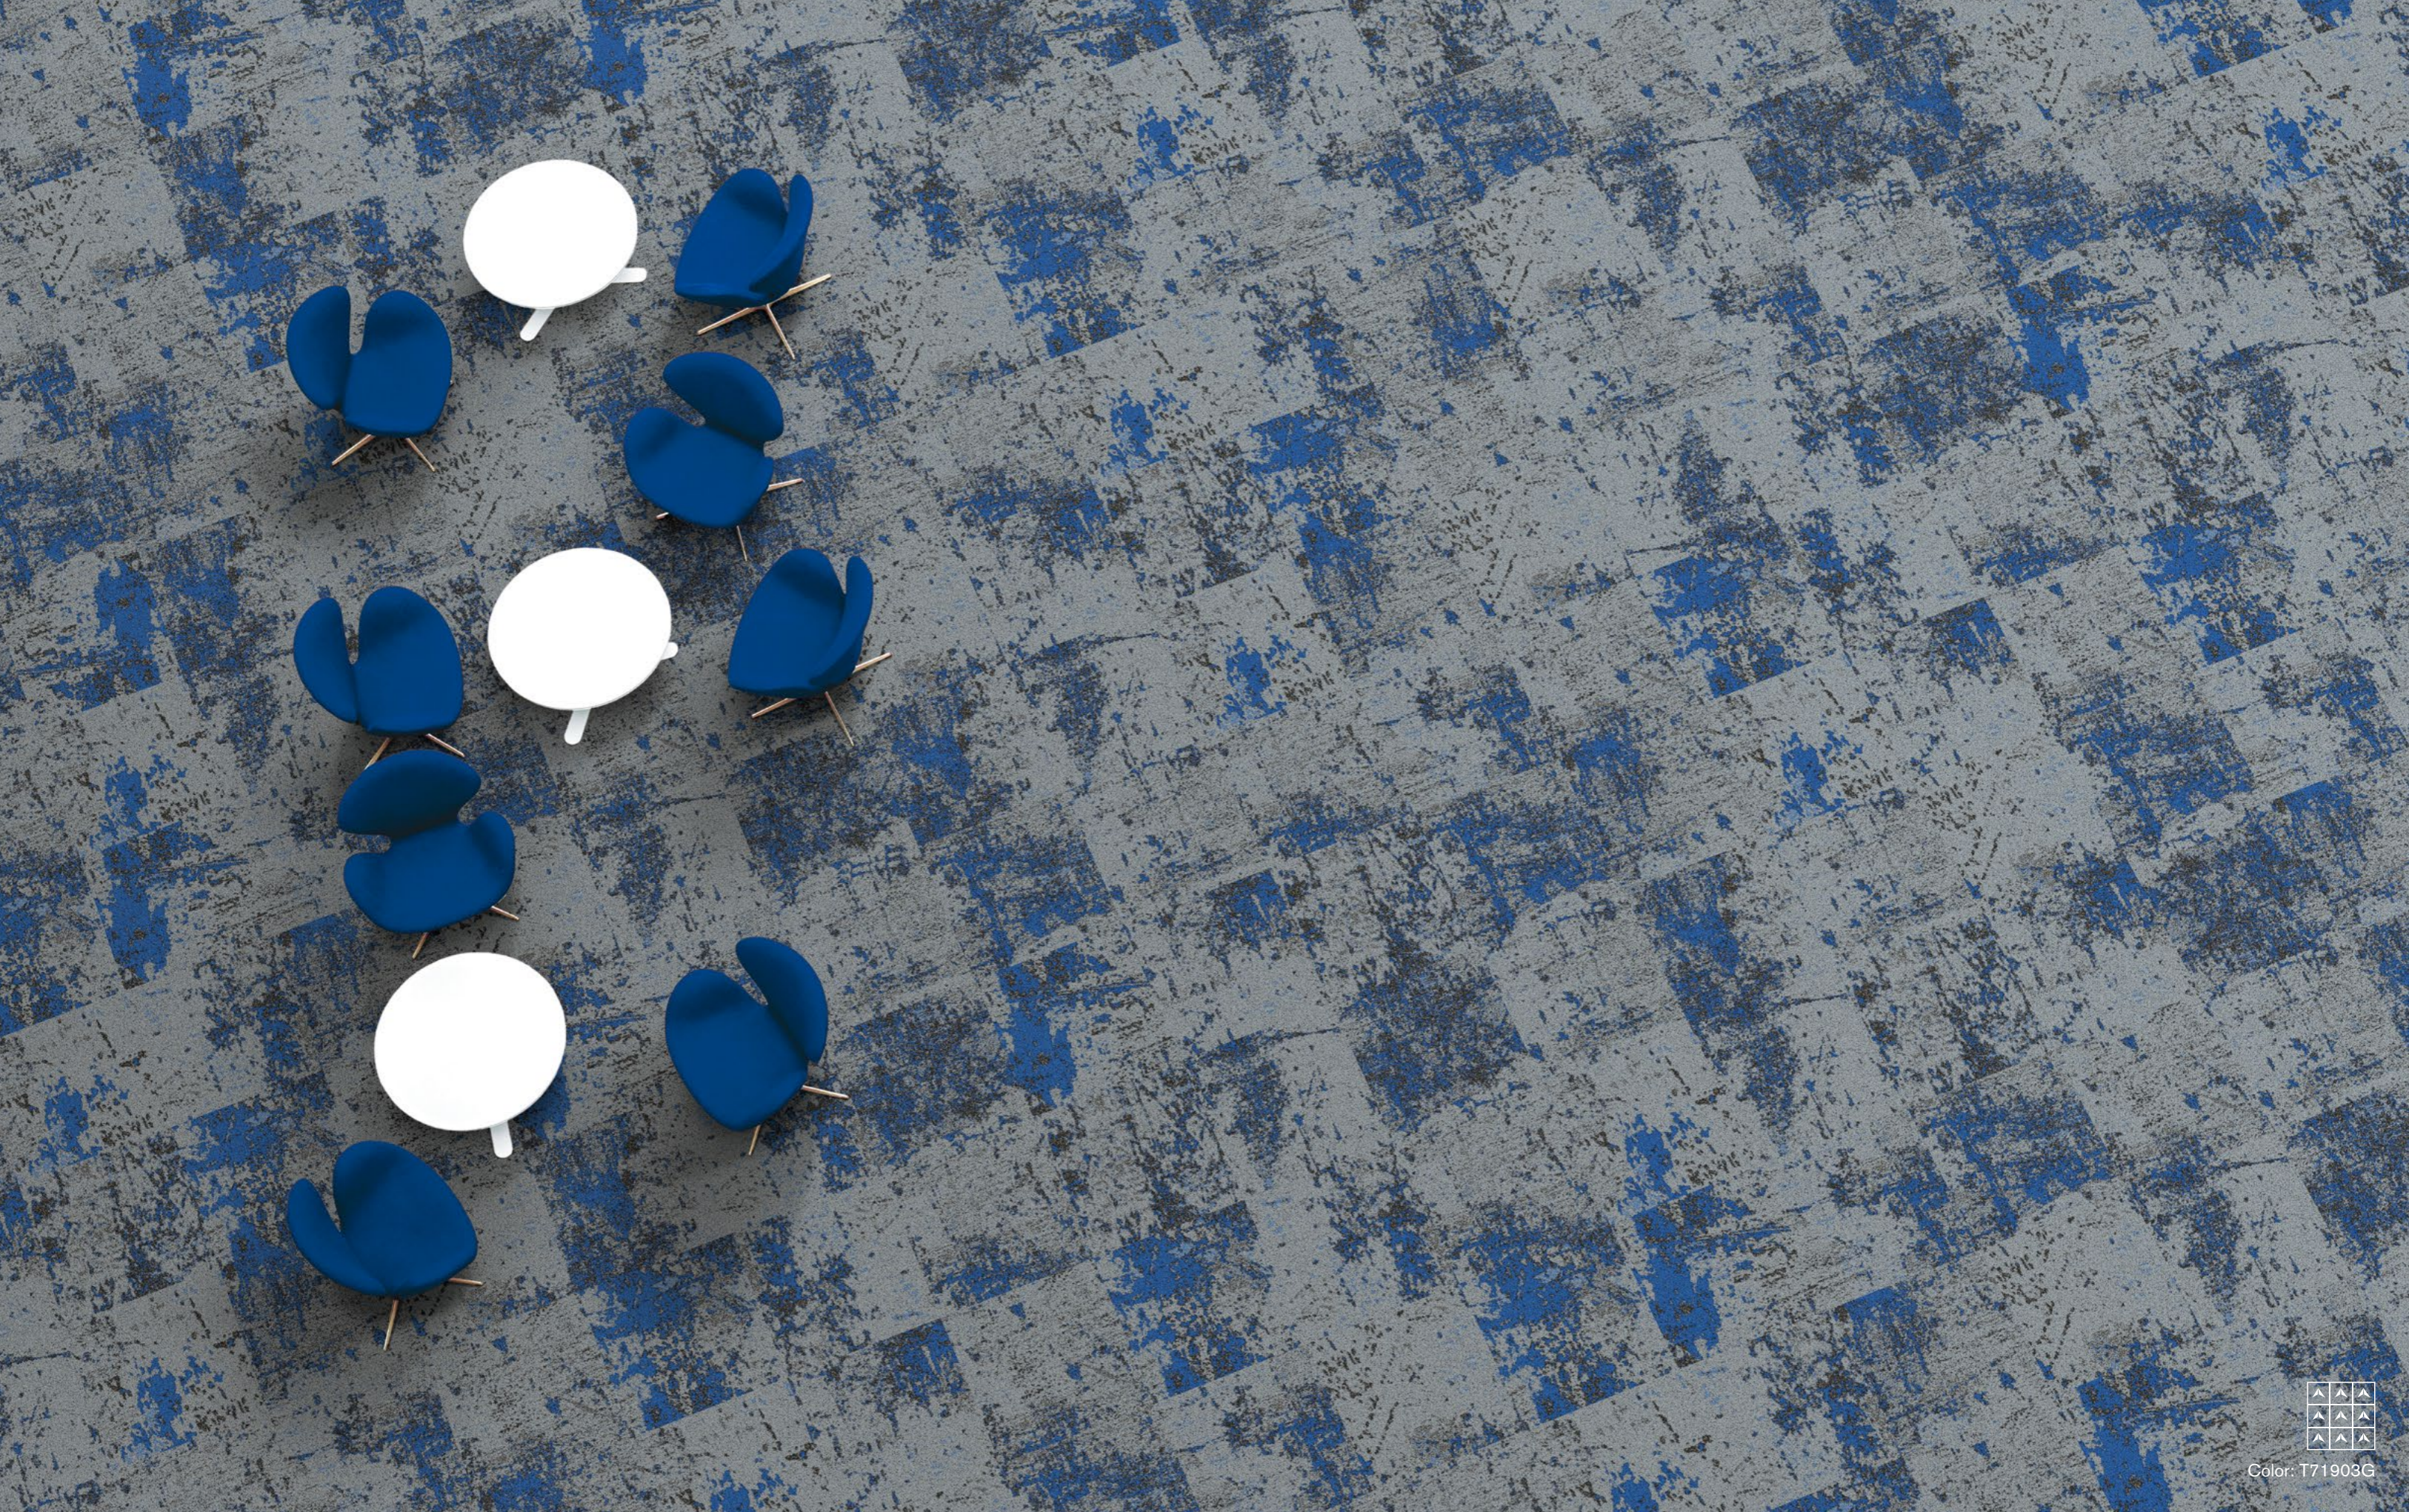





Color: T71902G / T71907G



Color: T71904G

















Color: T71901G / T71906G



<b>Style</b>	T719G "Free Form"
<b>Construction</b>	Multi Hi / Lo Loop
<b>Pile Fibre</b>	nexlon™ Premium Solution Dyed Nylon with Stain & Soil Resist Technology
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	1 / 10G
<b>Pile Height</b>	5.5 - 3.5mm
<b>Total Thickness</b>	8.4mm (± 0.5mm)
<b>Tile size</b>	500mm x 500mm
<b>Total Weight</b>	Approx. 6300g / m <sup>2</sup>
<b>Secondary Back</b>	RECYCLED TUNTEX Commercial Duraback
<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 KV.
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAIN</b> SHIELD™
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOIL</b> GUARD™
<b>Odor Reducer</b>	Ecofresh Treatment: <b>ECO</b> FRESH™
<b>Anti-microbial</b>	Microshield Treatment: <b>MICRO</b> SHIELD™
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

- Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.
- Environmental Product Declaration (EPD) certified by UL.
- Recycled Content Certification by US GreenCircle Certified.
- U.S. CRI Green Label Plus Certificate.
- Singapore Green Building Council Product Certificate - 4 Ticks "Leader".
- Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)
- Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 3.5 KV (AATCC 134)
- Passes the Quality Test of China National Carpet Quality Test Center.
- Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.
- ISO9001 Quality Management System.
- ISO14001 Environmental Management System.
- Passes EN 13501 European Fire Test Bfl.
- Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.





