

Shadow


T670

TUNTEX™

Shadow

As you pass the streetlight at night, you notice the shadow becoming gradually longer until it disappears. Shadow can create a sort of puppet show by changing the shape of your hand between the light. Shadows are everywhere, in real life, art, and architecture.




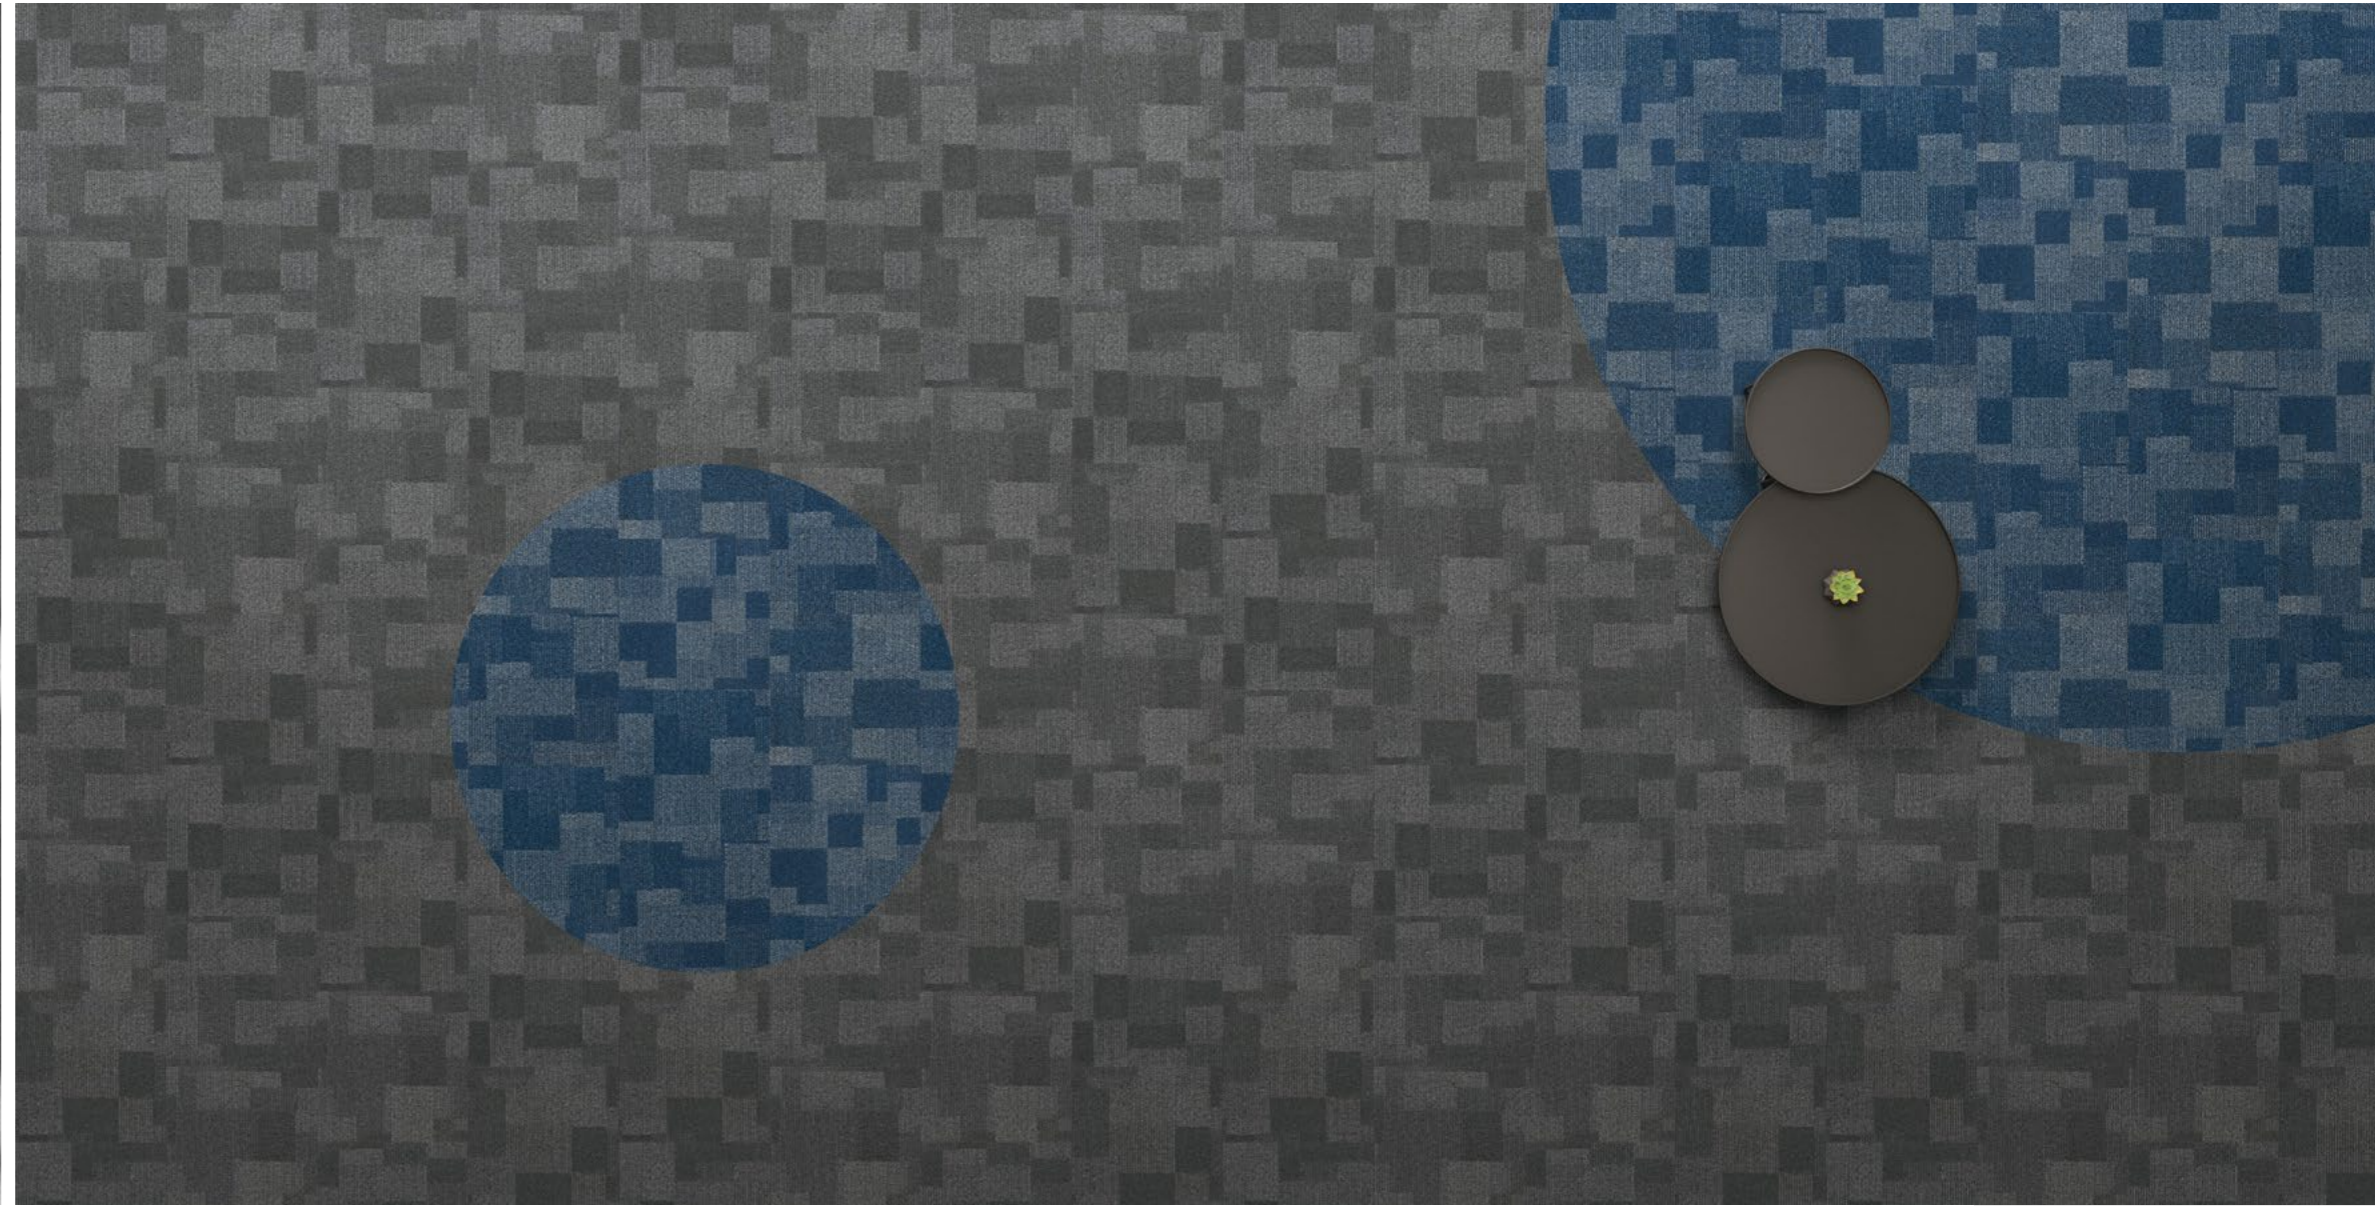

T67003 / T67010 Ashlar

Fickleness

Shadows always change shape with movement and light. It is sometimes short and squat, or sometimes long and thin, depending on how the light moves away.

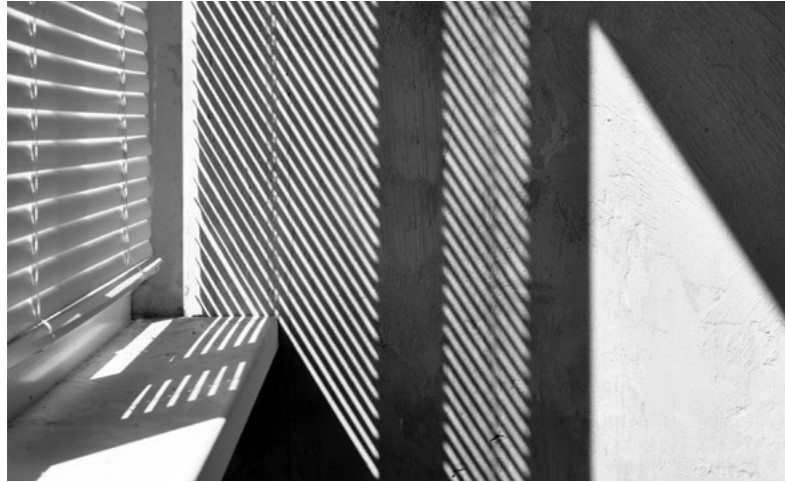

Dynamic

Inspired by shadows, T670 features simple texture through different combinations. The pattern can be different, depending on where you are in the room. T670 is available in 10 different colors, providing unpredictable possibilities to energize the space.





T67002 Quarter-Turn



T67010 Quarter-Turn



T67002 Brick




T67003 Quarter-Turn






T67011 Quarter-Turn



T67002 Coin



T67003 Fossil



T67010 Sapphire



T67011 Silver



T67012 Oat

Style	T670 "Shadow"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.5 / 4.5 / 3.5mm
Total Thickness	7.5mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4900g/m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



