

# Petrichor

T728




**TUNTEX™**

# Petrichor

Nature, refreshed by the rain, always reveals a unique tranquility and freshness. T728 Petrichor aims to evoke the scent of rain-kissed earth as you enter the indoor space. It carries a touch of moisture, a hint of freshness, and a warm, soothing sensation that invites you to immerse yourself in its embrace.



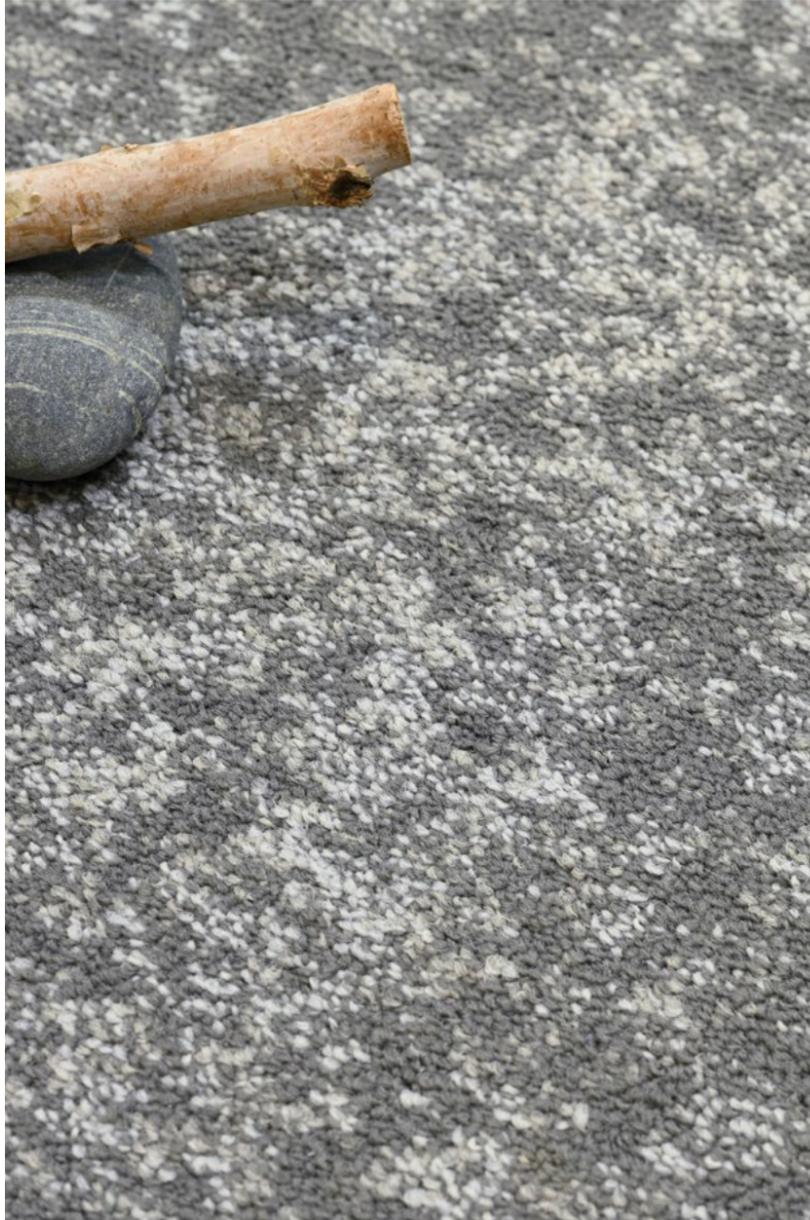

The mountains are shrouded in clouds and mist, as if draped in a delicate, mysterious veil. The air carries the fresh scent of earth and grass, inviting you to step into a pristine paradise.





T72808 Quarter-Turn




T72802 / T72806 Ashlar



T72801 Ashlar



T72804 Ashlar

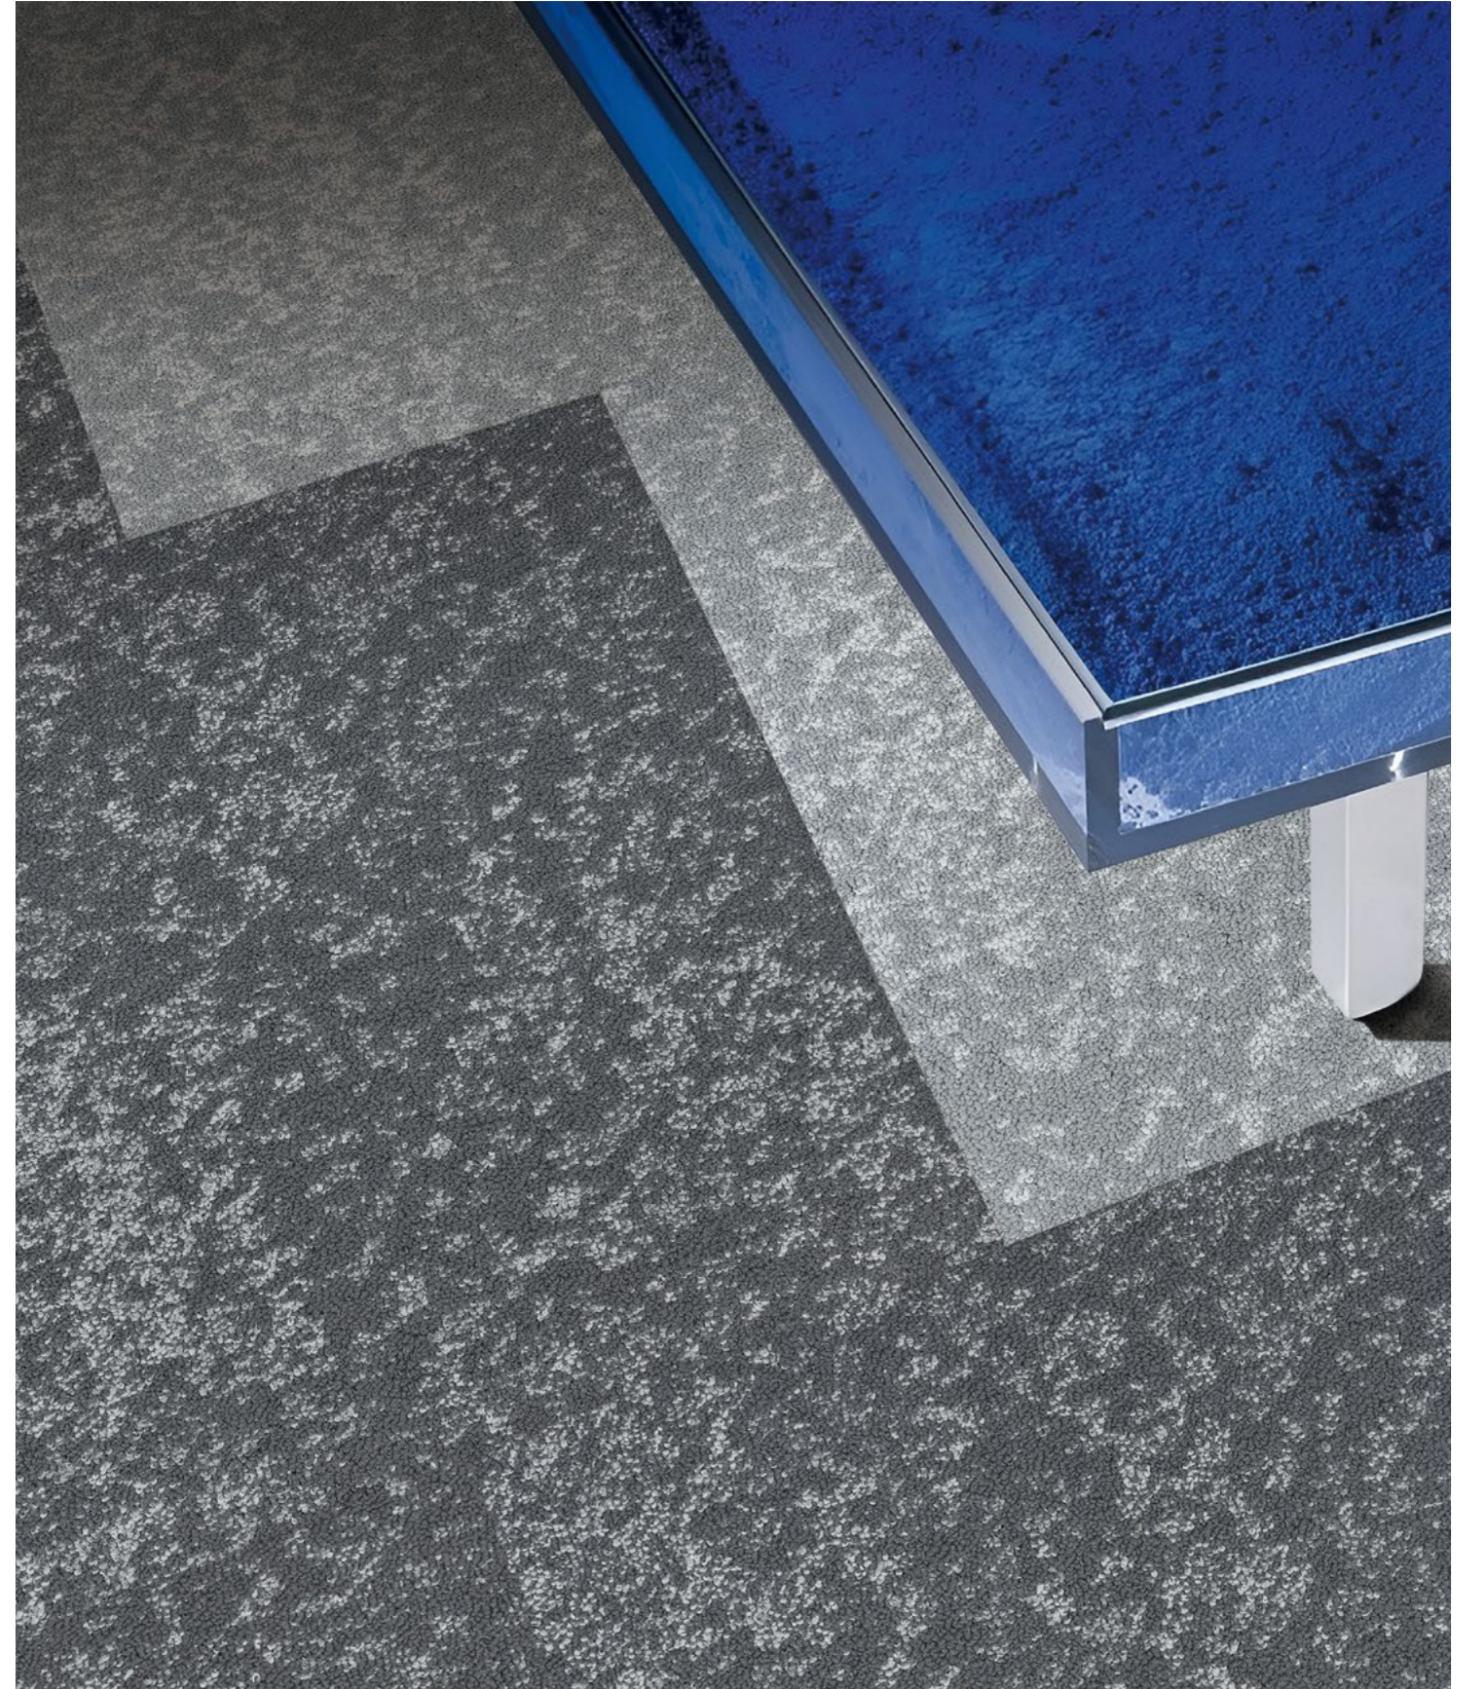

T72803 / T72804 Brick



T72805 Brick




T72801 Quarter-Turn




T72803 / T72804 Quarter-Turn




T72804 / T72808 Quarter-Turn




T72801 Grassy



T72802 Still Lake



T72803 White Pebble



T72804 Plant Ash



T72805 Lichen



T72806 Blue Hole



T72807 Drab



T72808 Clay

<b>Style</b>	T728 "Petrichor"
<b>Construction</b>	Multi Hi / Lo Loop
<b>Pile Fibre</b>	nexlon™ Premium Solution Dyed Nylon featured with aircell
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	1 / 10G
<b>Pile Height</b>	6.5 - 3.0mm
<b>Total Thickness</b>	8.5mm( ±0.5mm)
<b>Tile size</b>	500mm x 500mm
<b>Total Weight</b>	Approx. 6150g/m <sup>2</sup>
<b>Secondary Back</b>	TUNTEX Duraback
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAIN</b> SHIELD™
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOIL</b> GUARD™
<b>Odor Reducer</b>	Ecofresh Treatment: <b>ECO</b> FRESH™
<b>Anti-microbial</b>	Microshield Treatment: <b>MICRO</b> SHIELD™

<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 KV.
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



