




TUNTEX

## **Denim**


T895 Denim interprets the style and character of denim through carpets, transforming the wear and fading into intricate and interesting patterns. With nine color options that offer versatility and adaptability, these tiles can complement various interior styles and atmospheres.





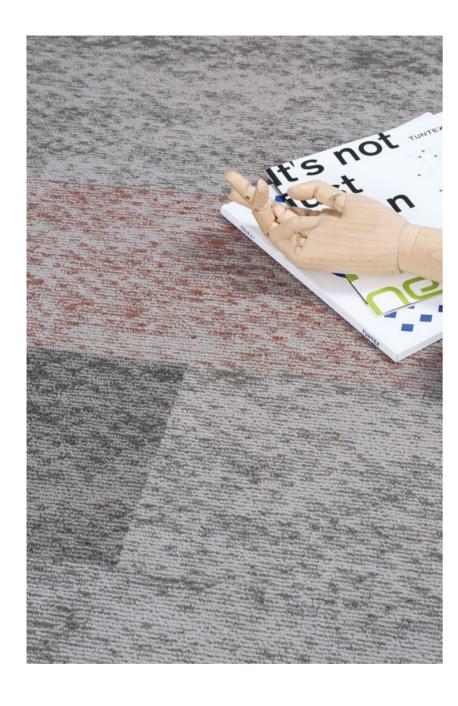

Denim, as a classic textile material, carries a rich history, cultural significance, and fashionable essence. Over time and with prolonged use, denim fabric develops a unique texture imbued with a slightly worn pattern.

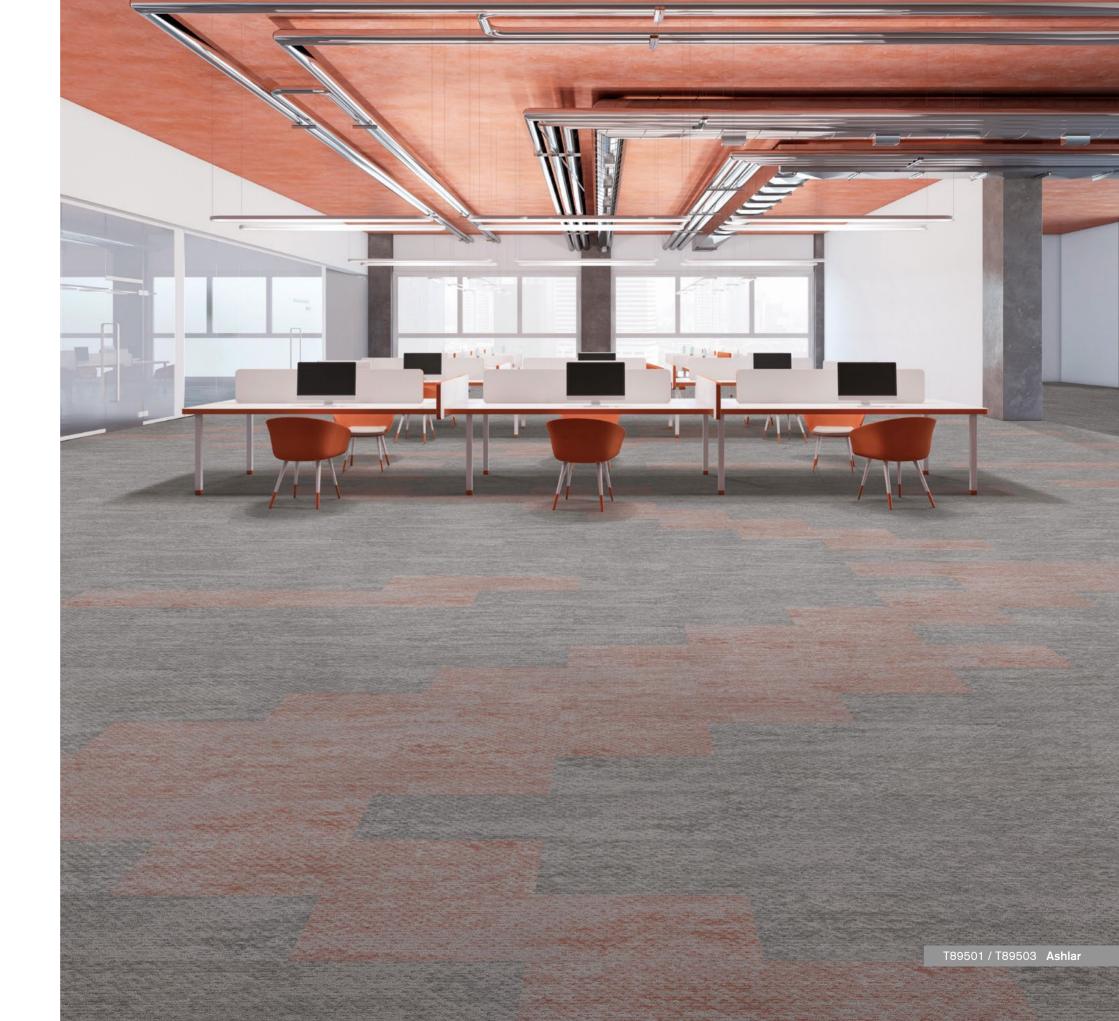









T89501 / T89502 | T89502 | T89503 | Herringbone





T89501 / T89502 / T89503 Ashlar









T89501 Hazel Wood



T89502 Hazelnut



T89503 Blush



T89504 Pebble



T89505 Shadow



T89506 Fossil



T89507 Stone



T89508 Slate



T89509 Sage

Style T895 "Denim"

Hi / Lo Loop Construction

nexlon<sup>™</sup> Premium Solution Dyed Nylon featured with aircell Pile Fibre

**Dve Method** Solution Dyed

1 / 12G Gauge

6.0 / 3.0mm Pile Height

7.4mm(±0.5mm) **Total Thickness** 

Tile size 250mm x 1000mm

**Total Weight** Approx. 4950g/m<sup>2</sup>

**Secondary Back TUNTEX Duraback** 

Stainshield Treatment: STAINSHIELD" Stain Resistance

Soil Resistance Soil Guard Treatment: SOILGUARD™

Product is warranted not to lose more than 10% pile fibre by **Wear Warranty** 

weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

Permanent Lifetime Protection - less than 2.0 KV. **Static Electricity** 

**Dimensional Stability** Warranted not to change in size by more than 0.5 mm in normal

use. Will not dome or dish in normal use.

Installation Tackifier or Releasable adhesive Recommended.

Sustainability All yarns used are Solution dyed to minimise use of water and exclude any effluent production.

ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test. Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.















