



# Flagstone


T709

TUNTEX™



# Flagstone

T709 Flagstone use the texture of flagstone and recreate a seamless pattern.

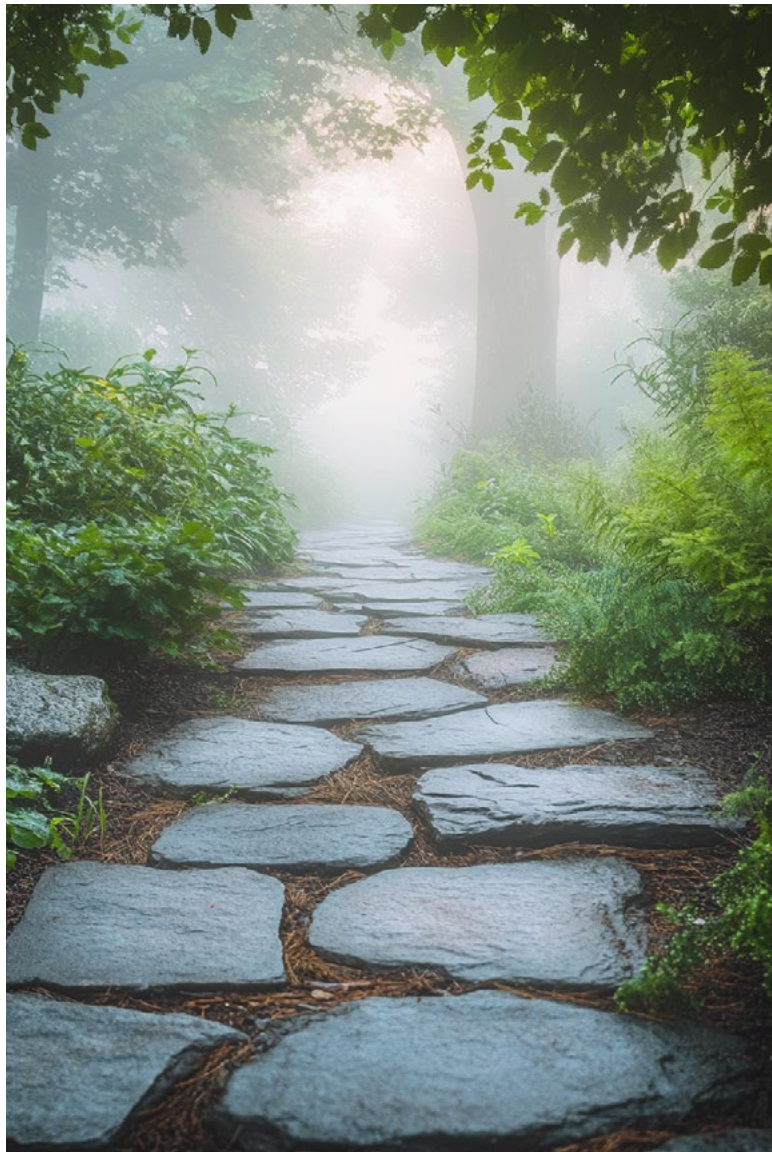





T709L01 / T709S01 Brick



T709L03 / T709S03 Brick










T709S04 Ashlar

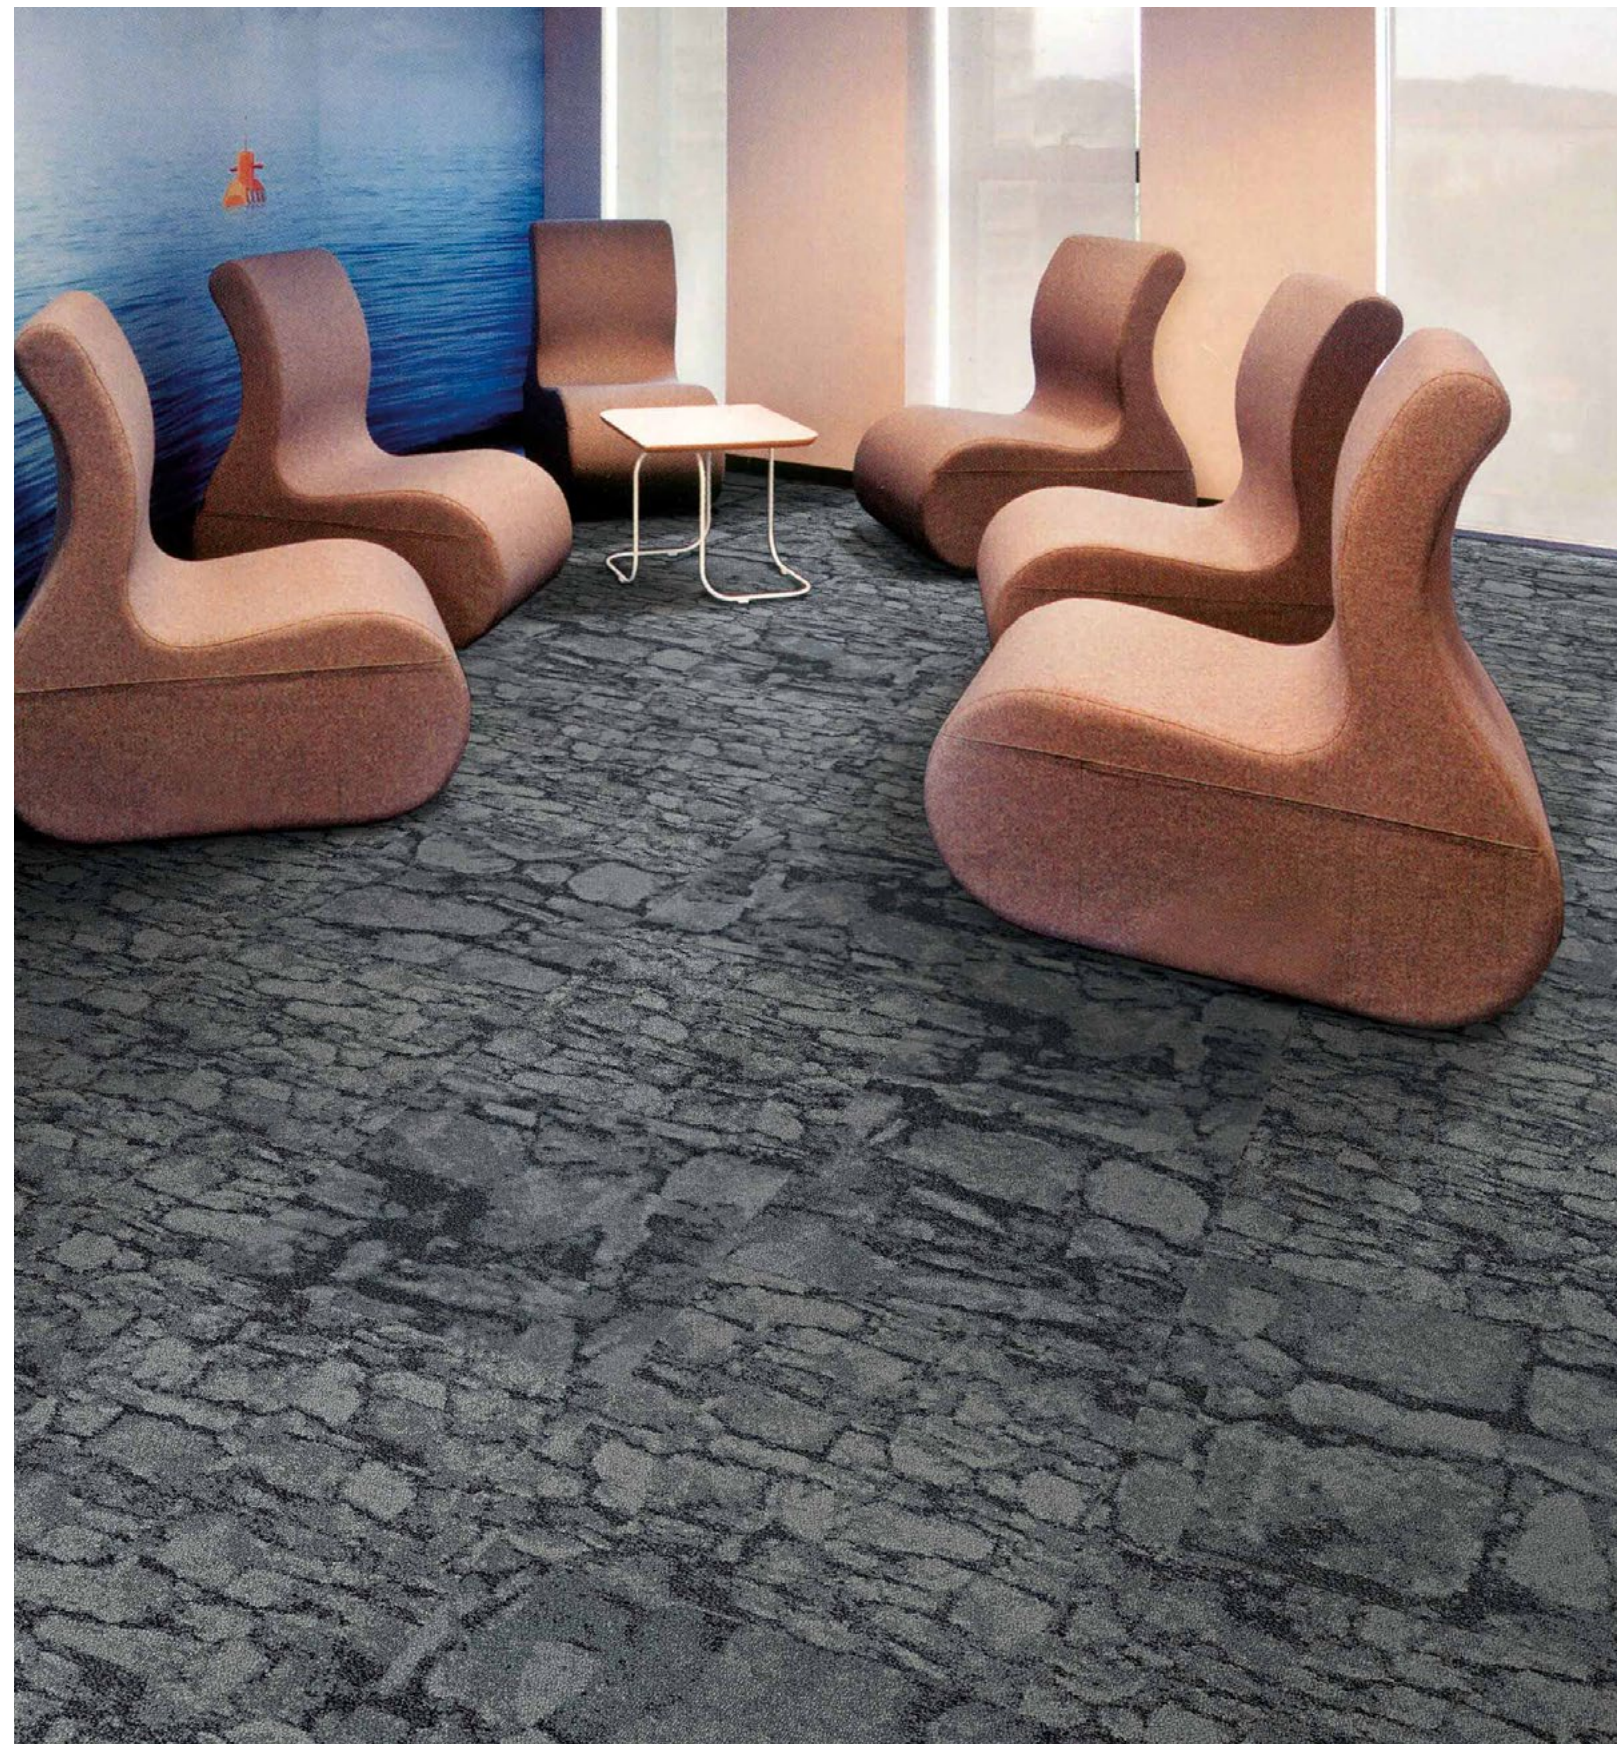

T709L05 / T709S05 Ashlar







T709L01 Limestone



T709S01 Limestone



T709L02 Moss



T709S02 Moss



T709L03 Plateau



T709S03 Plateau



T709L04 Phlogopite



T709S04 Phlogopite



T709L05 Gabbro



T709S05 Gabbro

<b>Style</b>	T709 "Flagstone"
<b>Construction</b>	Multi Hi / Lo Loop
<b>Pile Fibre</b>	nexlon™ Premium Solution Dyed Nylon
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	1/10 G
<b>Pile Height</b>	6.5 - 3.0 mm
<b>Total Thickness</b>	9.6 mm(±0.5mm)
<b>Tile size</b>	500mm x 500mm
<b>Total Weight</b>	Approx. 6400 g/m <sup>2</sup>
<b>Secondary Back</b>	TUNTEX Duraback
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAINSHIELD™</b>
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOILGUARD™</b>
<b>Odor Reducer</b>	Ecofresh Treatment: <b>ECOFRESH™</b>
<b>Anti-microbial</b>	Microshield Treatment: <b>MICROSHIELD™</b>

---

<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 KV.
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.





