Base T710
Bamboo T711
Blossom T712
TUNTEX™

Base
Bamboo
Blossom

T710 Base consist of a color palette that sets the tone for the rest of the design.
T711 Bamboo is inspired by the natural beauty of bamboo, which is reflected in the elegant pattern made in various colors.
T712 Blossom is inspired by the natural beauty of flower, which is reflected in the elegant pattern made in various colors.

T7101 / T711X16 / T711Y16 Ashlar

T7104 / T712X45 Brick

T7103 **Ashlar**

T7102 / T711X21 / T711Y21 Ashlar

T7103 / T711X32 Brick

T7103 / T712X32 / T712Y32 **Ashlar**

T7104 / T711X45 / T711Y45 Brick

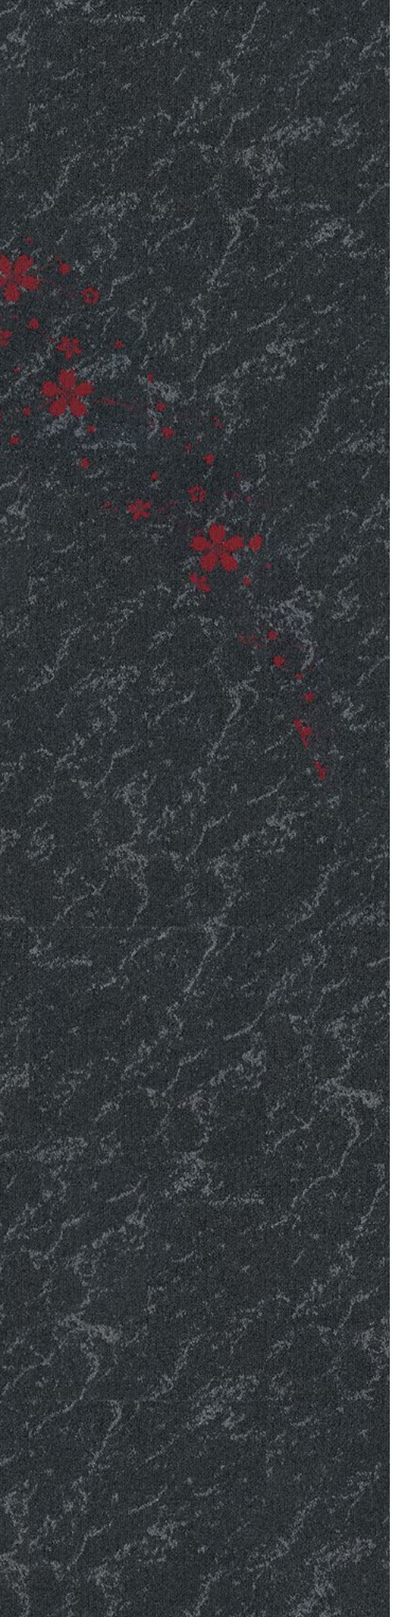

T711 BAMBOO

full pattern | half pattern









T712 BLOSSOM

full pattern | half pattern









T710 BASE



Style	T710 "Base" / T711 "Bamboo" / T712 "Blossom"
Construction	Multi Hi / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1/10 G
Pile Height	6.0 - 4.0 mm
Total Thickness	9.0 - 9.2 mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	6150 - 6200 g/m^2
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: **STAIN**SHIELD™
Soil Resistance	Soil Guard Treatment: **SOIL**GUARD™
Odor Reducer	Ecofresh Treatment: **ECO**FRESH™
Anti-microbial	Microshield Treatment: **MICRO**SHIELD™
Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ⩽ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.