

Vintage

T716 Vintage collection features organic patterns with a tie-dye effect that gives a sense of antiqueness and tells a story of history and memory.







Unique

The beauty of vintage comes from the uniqueness the era brings, similar to wine. Each vintage wine has a particular flavor fundamentally molded by the grapes harvested that year. "Vintage" describes something hard to replicate or mimic, unrepeatable over time.






Timeless

There are styles that only get better over time. Timeless elements that, like vintage wine, age gracefully and even become more charming and appreciated over the decades. Tuntex's T716 Vintage collection is designed with organic patterns with a tie-dye effect, creating a sense of antiqueness that tells a story of history and memory, ensuring its long lasting presence.







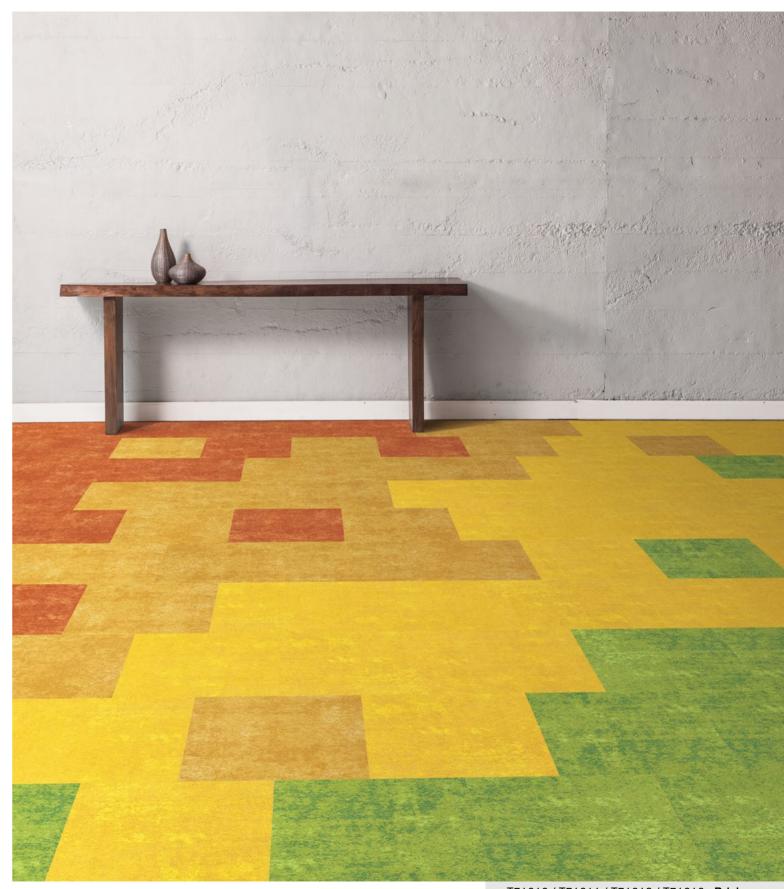


T71605 / T71606 / T71611 / T71612 Quarter-Turn


T71610 / T71611 / T71612 / T71616 Brick



T71610 / T71611 / T71617 / T71619 Quarter-Turn

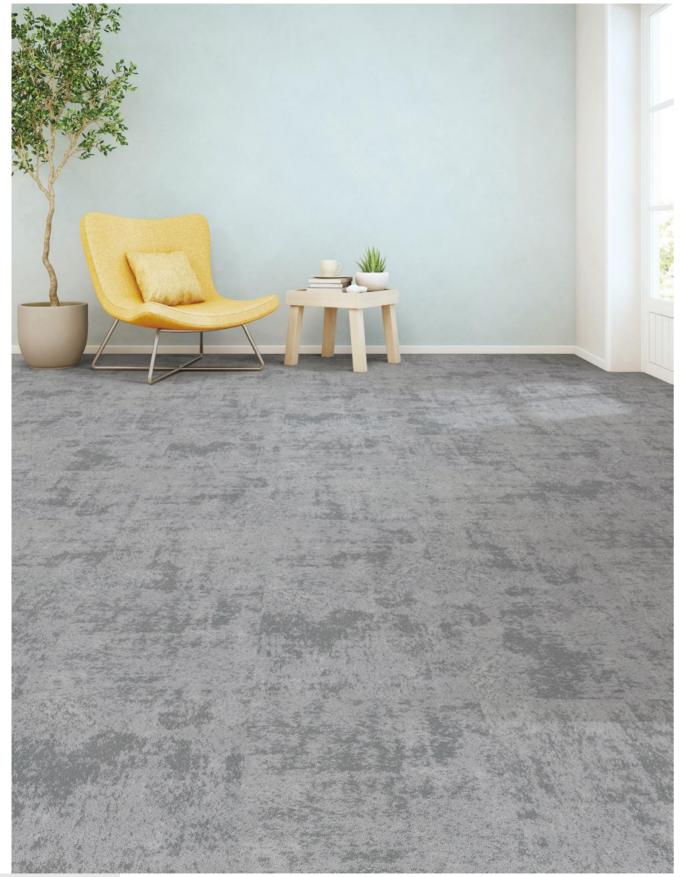



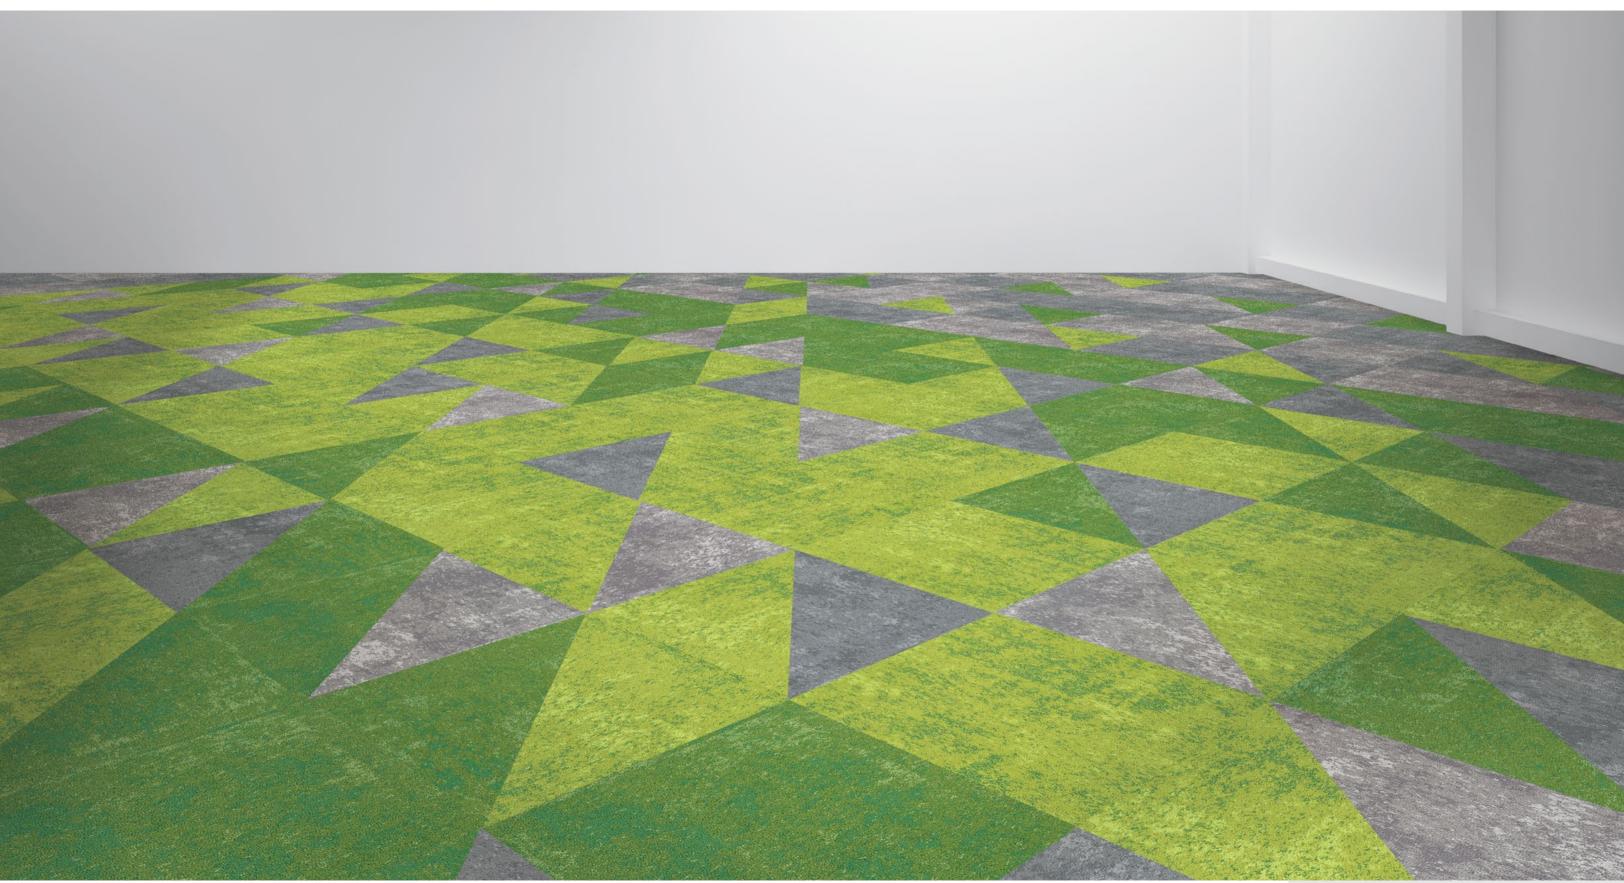

T71603 / T71607 / T71612 / T71613 Quarter-Turn





T71605 / T71606 Brick








T71601 / T71603 / T71604 / T71610 Quarter-Turn

T71602 / T71603 / T71604 / T71607 Quarter-Turn



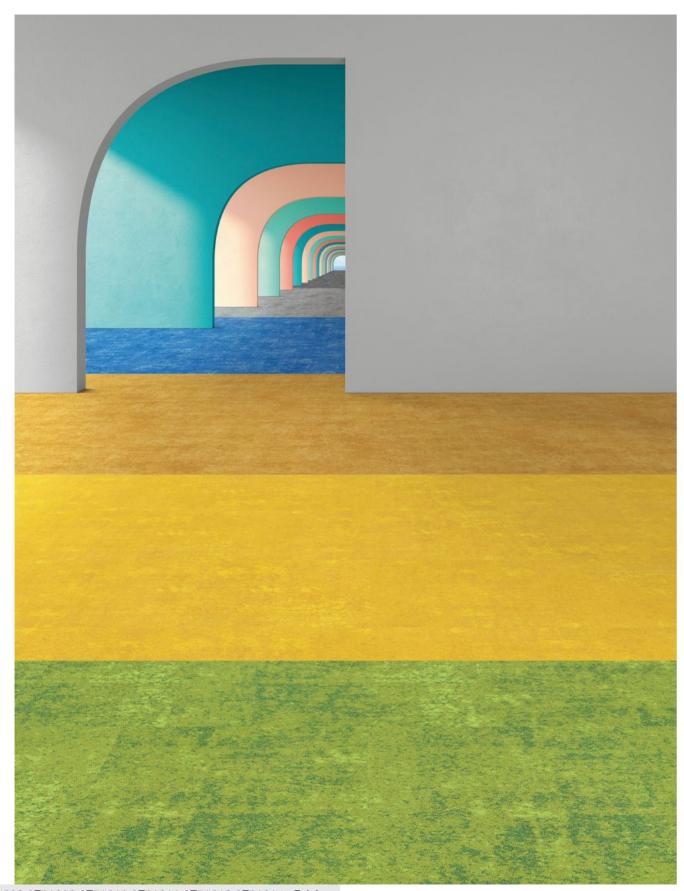

T71602 / T71603 / T71610 / T71611 / T71612 / T71614 Brick



T71601 Moscato



T71603 Hermitage



T71605 Chablis



T71608 Penfolds

T71613 Barossa

T71615 Tuscany

T71602 Riesling

T71604 Reims

T71607 Lafitte



T71610 Champagne T71611 Chardonnay



T71612 Napa



T71614 Marlborough



T71616 Cabernet



T71618 Burgundy



T71619 Bordeaux

Style T716 "Vintage"

Multi Hi / Lo Loop Construction

Pile Fibre Universal Fiber Solution Dyed Nylon

Dve Method Solution Dyed

Gauge 1/10 G

6.0 - 3.5 mm Pile Height

8.4 mm(±0.5mm) **Total Thickness**

Tile size 500mm x 500mm

Total Weight Approx. 6300 g/m²

Secondary Back TUNTEX Duraback

Stain Resistance Stainshield Treatment: STAINSHIELD"

Soil Guard Treatment: SOILGUARD™ Soil Resistance

Odor Reducer Ecofresh Treatment: ECOFRESH™

Anti-microbial Microshield Treatment: MICROSHIELD™

Wear Warranty Product is warranted not to lose more than 10% pile fibre by

weight in normal commercial use within 15 years.

Colour Fastness 15 Year Warranty AATCC 16. Grade 4 - Little or no change.

Static Electricity Permanent Lifetime Protection - less than 2.0 KV.

Dimensional Stability Warranted not to change in size by more than 0.5 mm in normal

use. Will not dome or dish in normal use.

Installation Tackifier or Releasable adhesive Recommended.

Sustainability All yarns used are Solution dyed to minimise use of water and

exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.













