Weave Plus
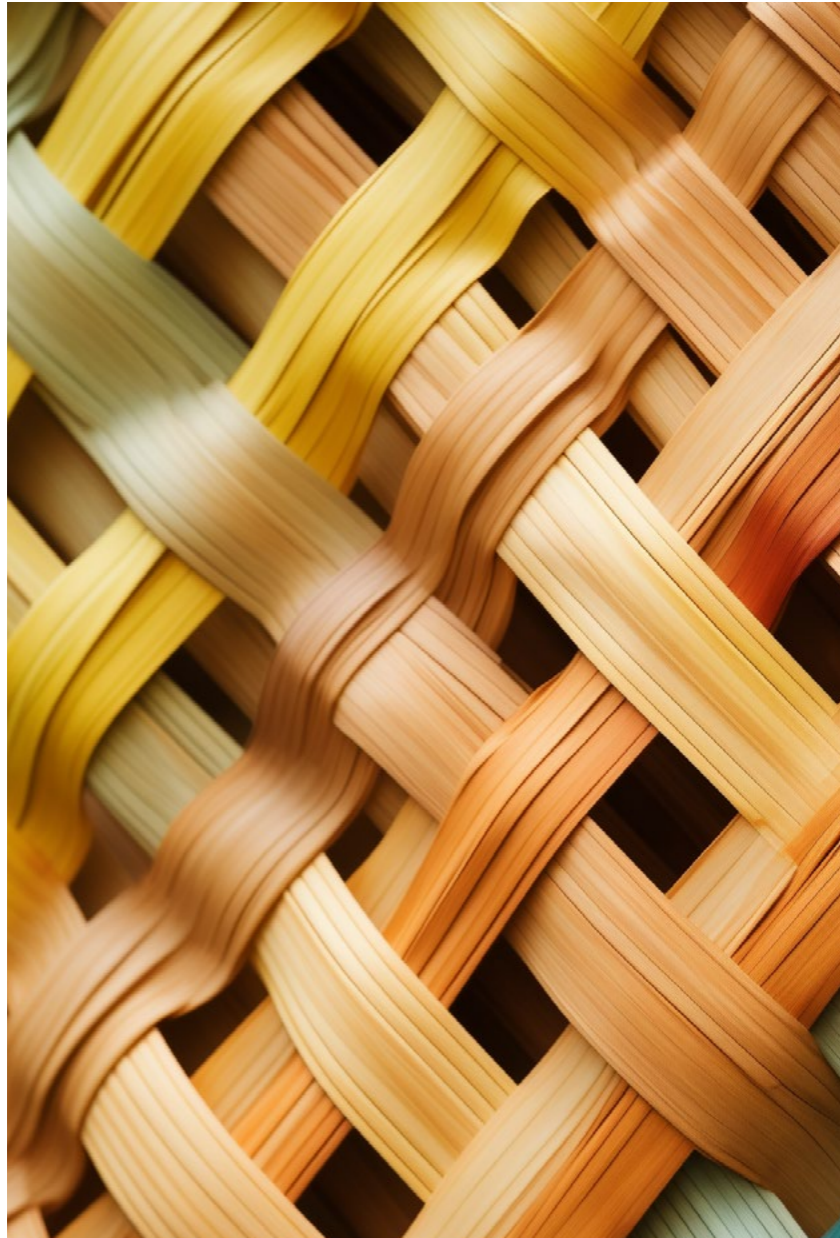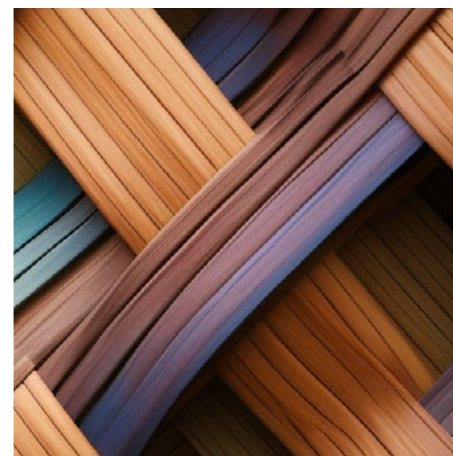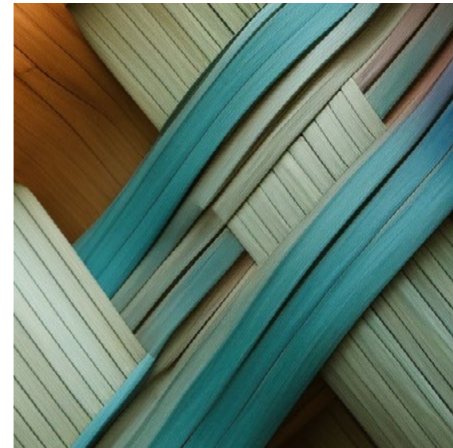## T718

TUNTEX™

Weave Plus

T718 Weave Plus gets inspiration from the classic look of woven cloth. Soft tone brings a sense of warmth and coziness while keeping the entire space visually bright and comfortable.

T71840 / T71841 **Quarter-Turn**

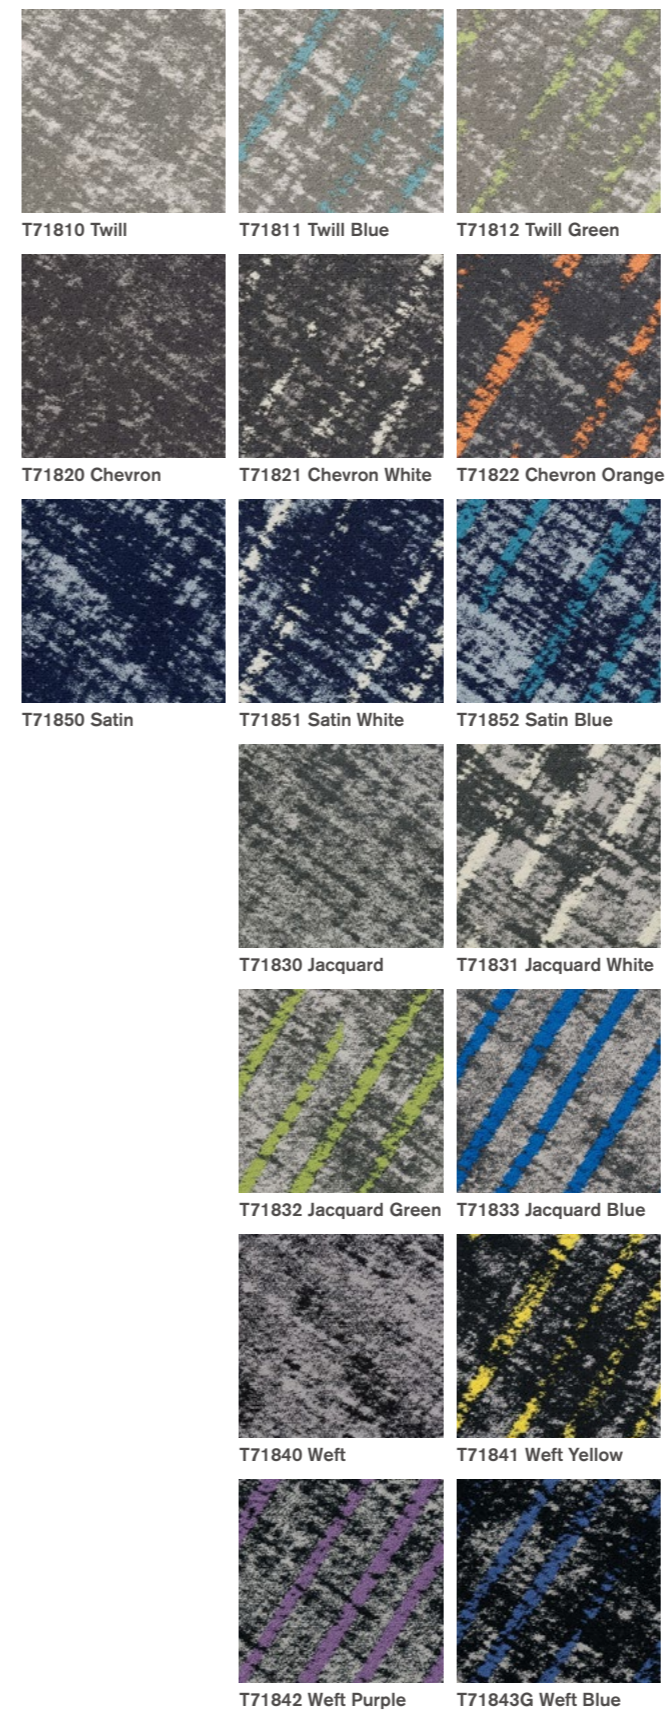T71810 / T71811 Brick

T71840 / T71842 Brick

T71840 / T71843 Brick

T71850 / T71851 Brick

T71830 / T71831 / T71832 Brick

T71810 Twill	T71811 Twill Blue	T71812 Twill Green
T71820 Chevron	T71821 Chevron White	T71822 Chevron Orange
T71850 Satin	T71851 Satin White	T71852 Satin Blue
T71830 Jacquard	T71831 Jacquard White	
T71832 Jacquard Green	T71833 Jacquard Blue	
T71840 Weft	T71841 Weft Yellow	
T71842 Weft Purple	T71843G Weft Blue	

Style	T718 "Weave Plus"
Construction	Multi Hi / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1/10 G
Pile Height	5.5 - 3.0 mm
Total Thickness	8.4 mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 6200 g/m²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: **STAIN**SHIELD™
Soil Resistance	Soil Guard Treatment: **SOIL**GUARD™
Odor Reducer	Ecofresh Treatment: **ECO**FRESH™
Anti-microbial	Microshield Treatment: **MICRO**SHIELD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

T71830 / T71833 Brick