

Times Square

T722



TUNTEX™

Times Square

T722 Times Square captures the stunning metropolitan view at night. The tail lights of cars, bustling streets, and lights become shapes and colors in the design, creating a vibrant vibe.







T72207 Brick

Flourishing

NYC Times Square is brightly adorned with billboards, making it look like day. People are talking around you and cars are honking, but you're impervious to them because you're captivated by all the lights.

All images are computer generated files and may not exactly represent actual installation appearance and tile seams. Full tiles can be provided if required.

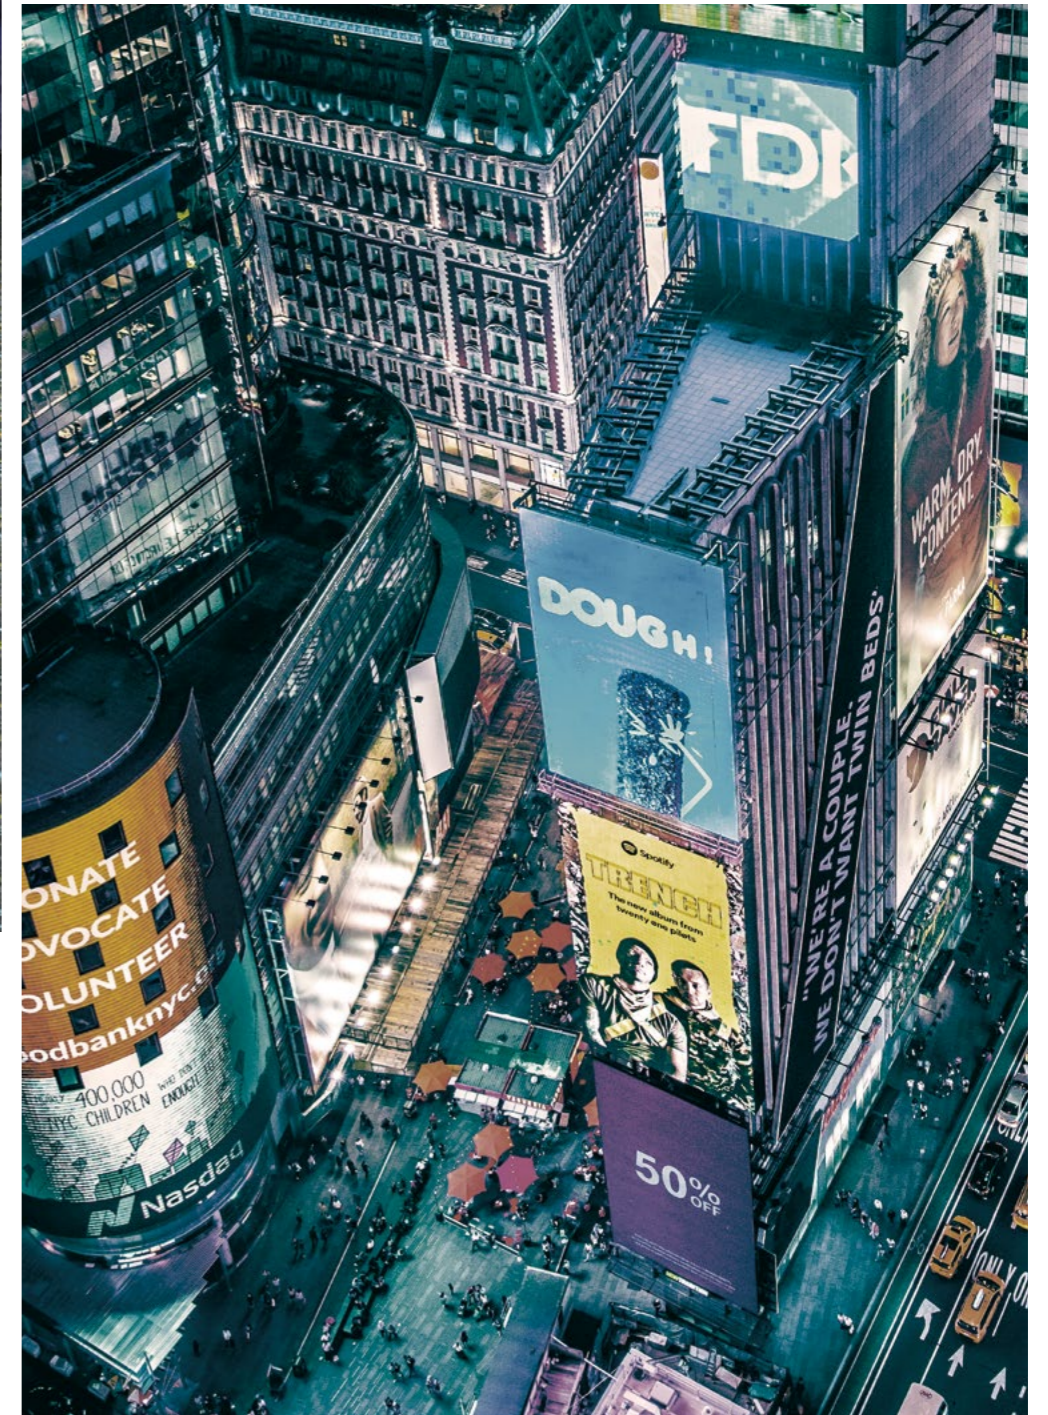

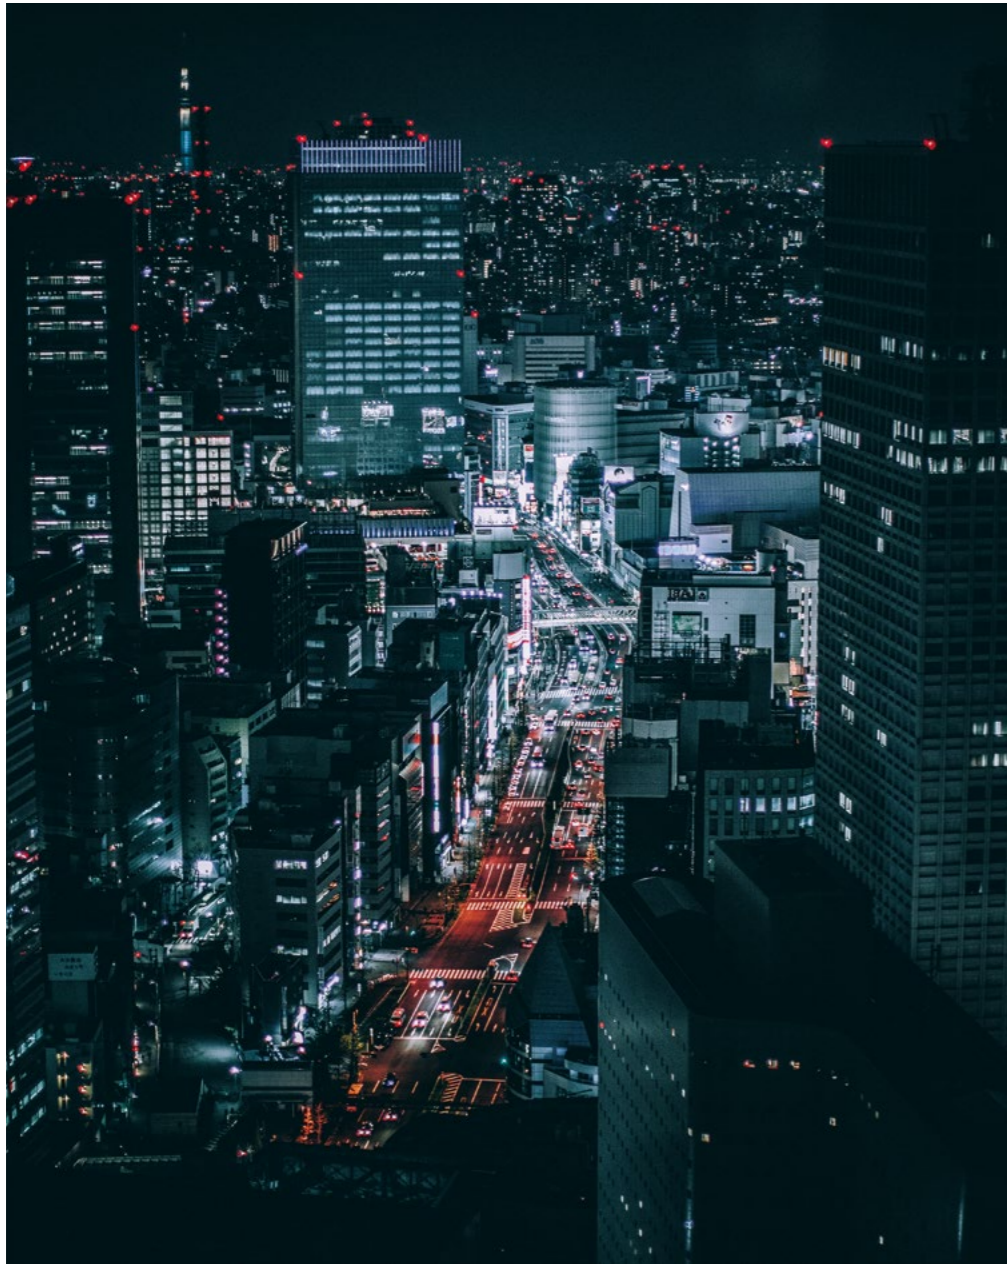

T72208 Quarter-Turn

Cosmopolitan

Do you ever enjoy the view of metropolitan areas at night on your way home? The tail lights of cars swoosh by as you drive past, and the lights from the buildings around you embellish the night sky above you.

T722
product insight



T72201 Brick




T72203 Quarter-Turn






T72205 Quarter-Turn

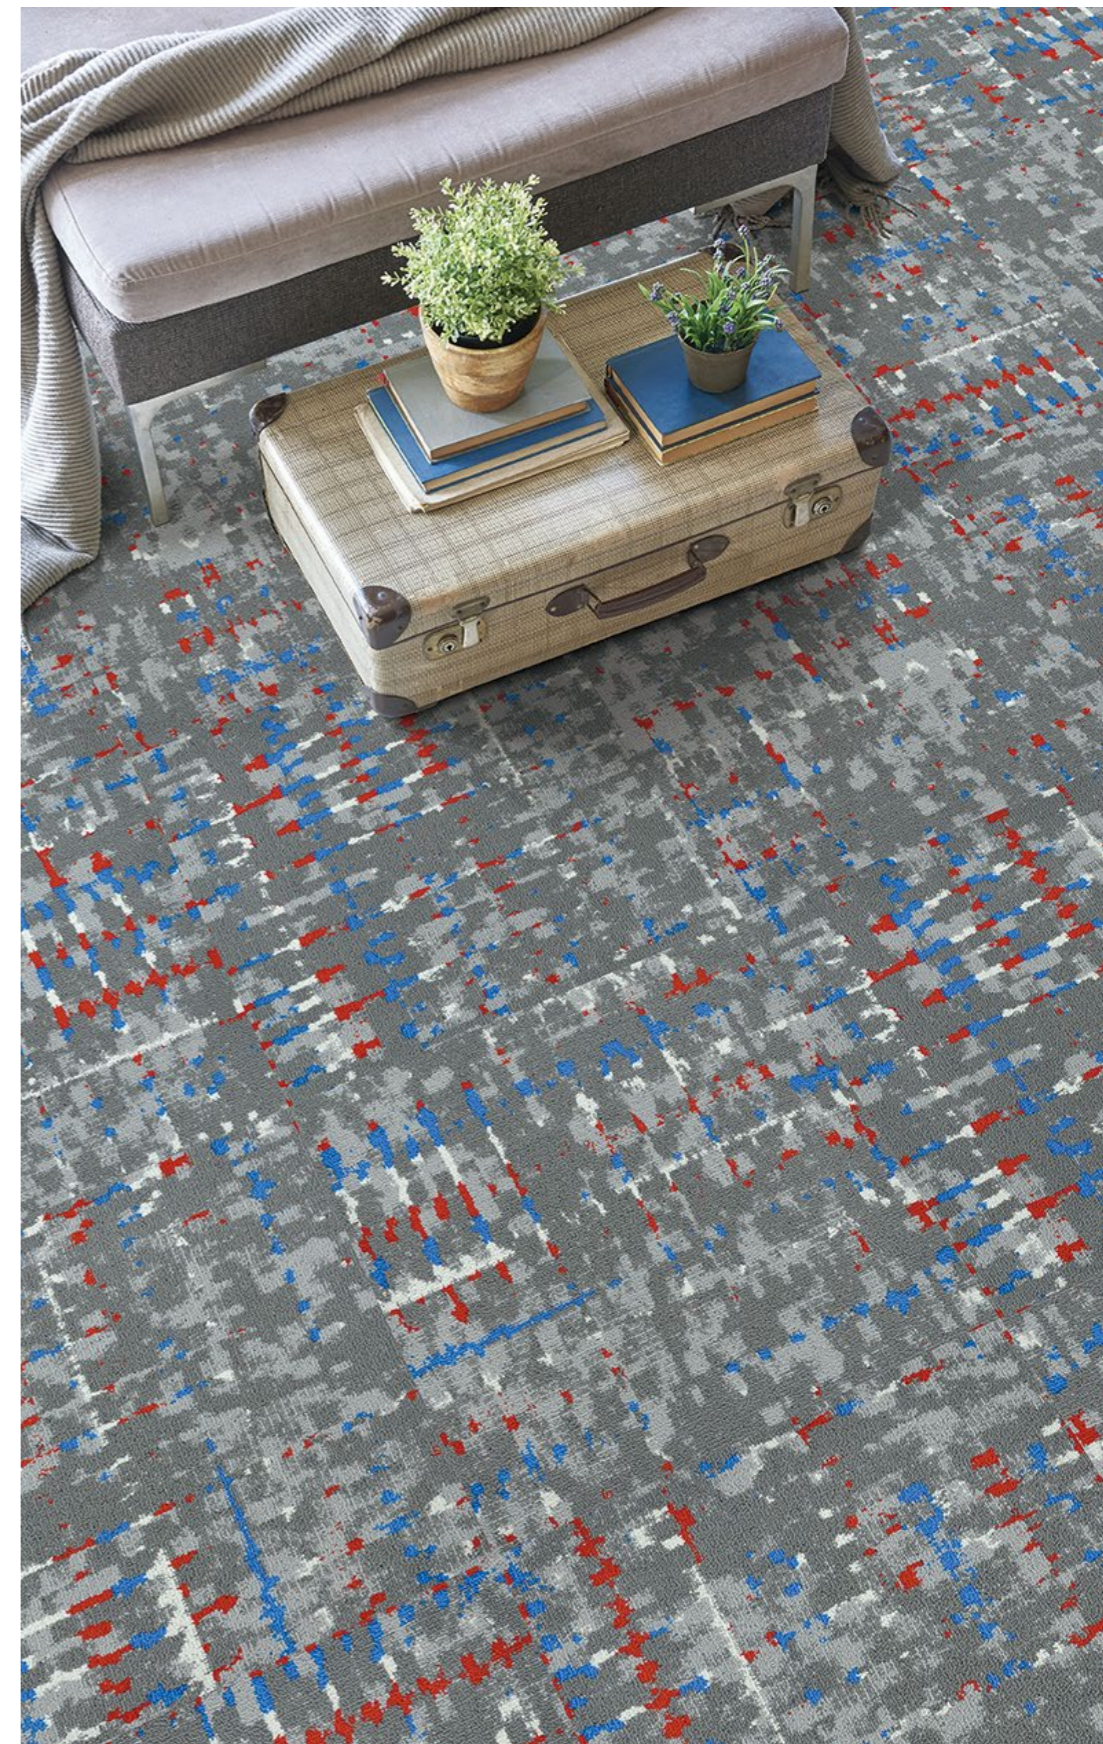


T72204 Quarter-Turn

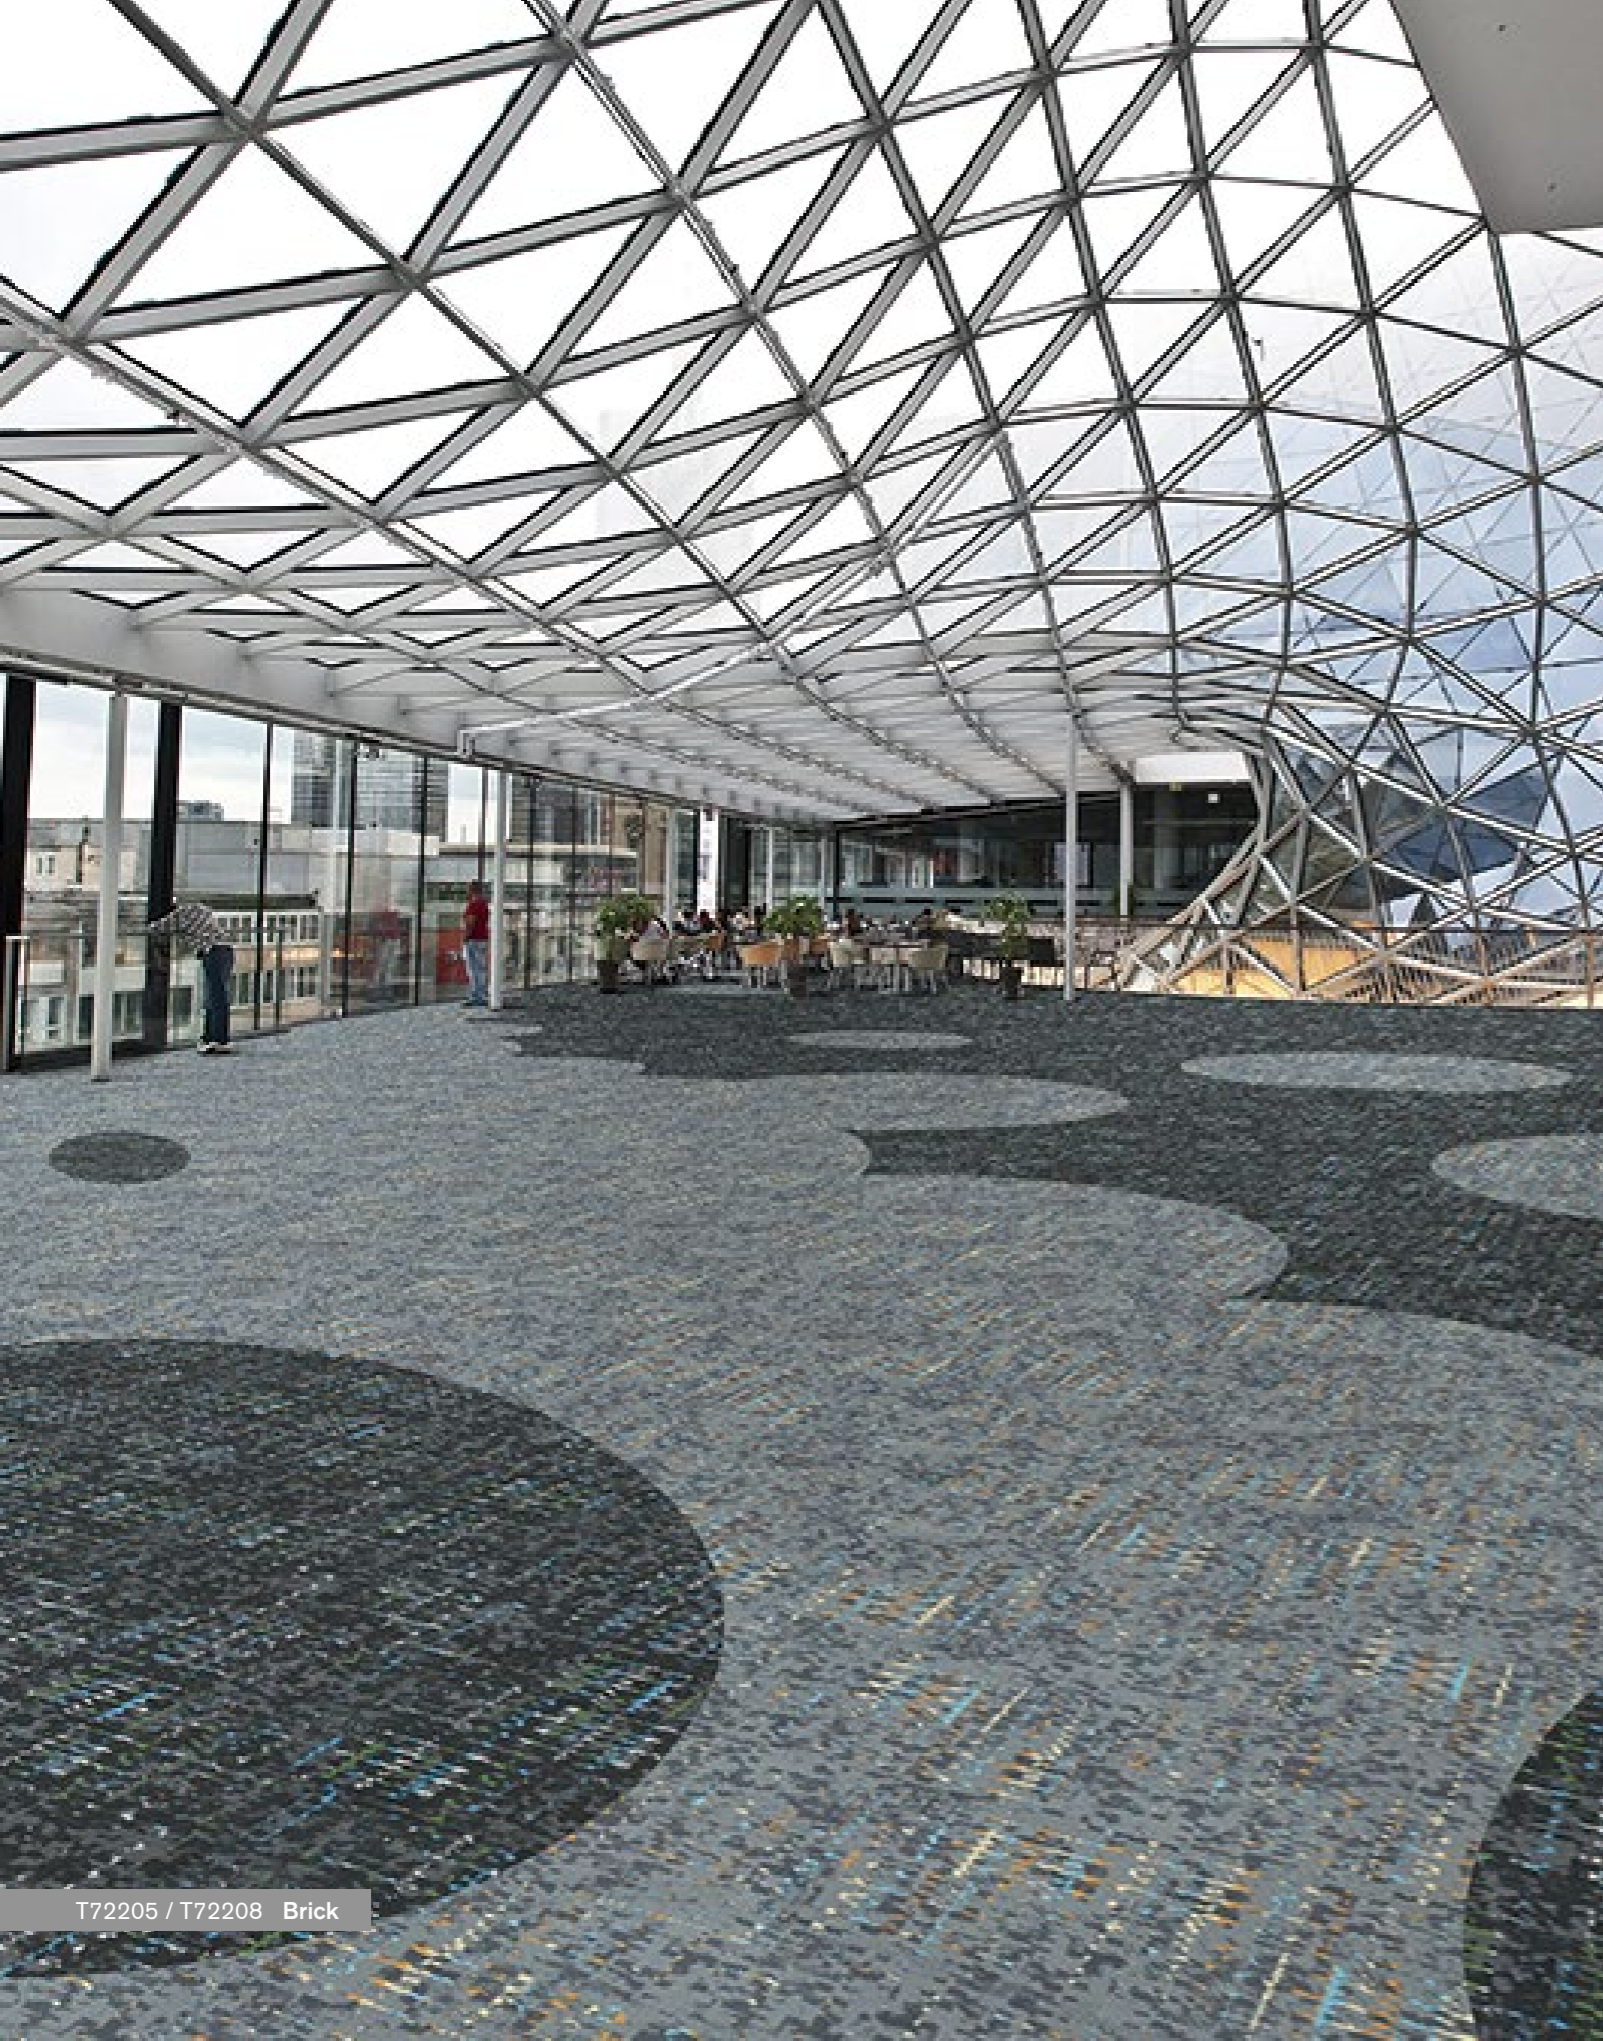


T72205 / T72208 Brick




T72201 / T72205 / T72207 / T72208 Brick




T72201 Long Island




T72202 Rockefeller




T72203 Soho




T72205 Midtown




T72204 Central Park



T72206 Yankee



T72207 Manhattan



T72208 Broadway

Style	T722 "Times Square"
Construction	Multi Hi / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1/10 G
Pile Height	9.0 - 4.5 mm
Total Thickness	11.0 mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 6400 g/m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™
Odor Reducer	Ecofresh Treatment: ECO FRESH™
Anti-microbial	Microshield Treatment: MICRO SHIELD™
<hr/>	
Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



