




**TUNTEX™**



# Zephyr

T678 Zephyr captures the serene movement of wind across open fields. Inspired by delicate natural contours, this design blends flowing silhouettes, minimalist patterns, and soothing color tones to craft a refined expression of understated elegance. The carpet becomes more than a surface—it redefines the atmosphere of the space with quiet luxury and poetic grace.

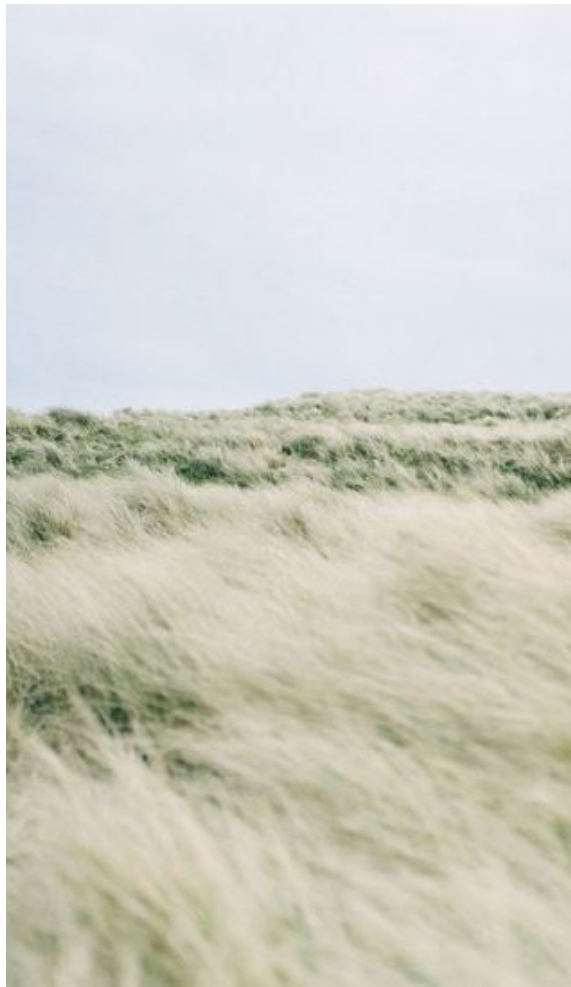





T67801 / T67802 Quarter-Turn



T67802 / T67803 Brick









T67805 Brick



T67804 Ashlar









T67805 / T67806 Ashlar



T67805 Ashlar





T67807 Brick



T67808 Ashlar



T67809 Brick





T67802 / T67804 Brick



T67803 / T67804 Brick





T67804 Ashlar



T67801  
Cloud




T67802  
Hazel Wood




T67803  
Cedar



T67804  
Oat




T67805  
Fossil




T67806  
Pebble



T67807  
Sage




T67808  
Seaweed



T67809  
Moss



T67810  
Stone



T67811  
Spruce



T67812  
Aegean

Style	T678 "Zephyr"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.5 / 4.0 / 3.0mm
Total Thickness	7.5mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4950g/m <sup>2</sup>
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: <b>STAIN</b> SHIELD™
Soil Resistance	Soil Guard Treatment: <b>SOIL</b> GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.





