

Stonehenge

T901



TUNTEX™


Stonehenge

T901 Stonehenge draws inspiration from the ancient and enigmatic its namesake monument. Its abstract arrangement of megalithic forms creates a harmonious geometric texture, brought to life through an earthy palette of greys, browns, and beige tones. Through this artful flooring design, the story of civilization is retold—bringing a timeless sense of depth and sophistication to modern commercial spaces.





T90104 Ashlar

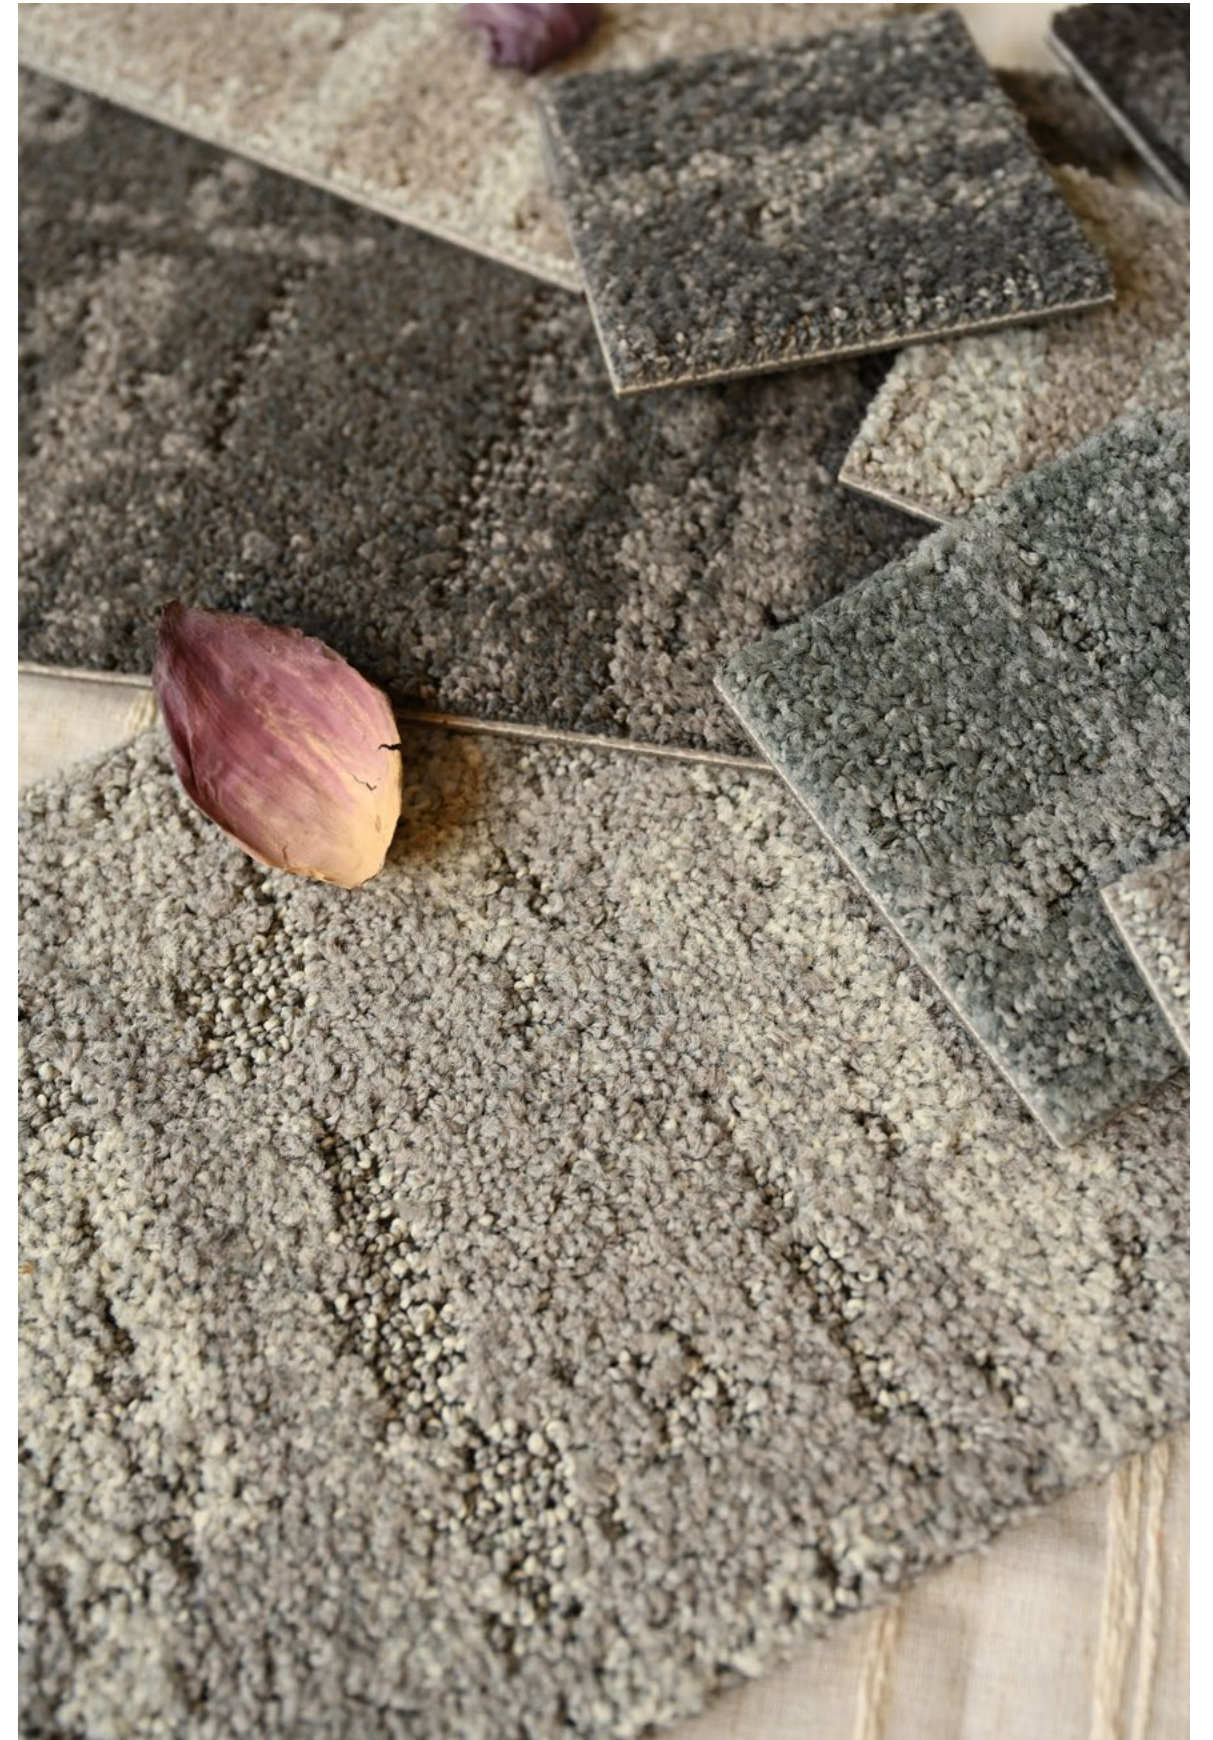





T90101 Quarter-Turn



T90106 Brick



T90104 / T90105 Ashlar



T90105 Ashlar



T90107 Quarter-Turn



T90101 Quarter-Turn



T90101 Cloud



T90102 Fossil



T90103 Shadow



T90104 Tan



T90105 Ceda



T90106 Slate



T90107 Sage

Style	T901 "Stonehenge"
Construction	High Cut Low Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1 / 10G
Pile Height	8.5 / 4.5mm
Total Thickness	10.0mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 5300g / m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



