




# ReGenerate

T108



TUNTEX™



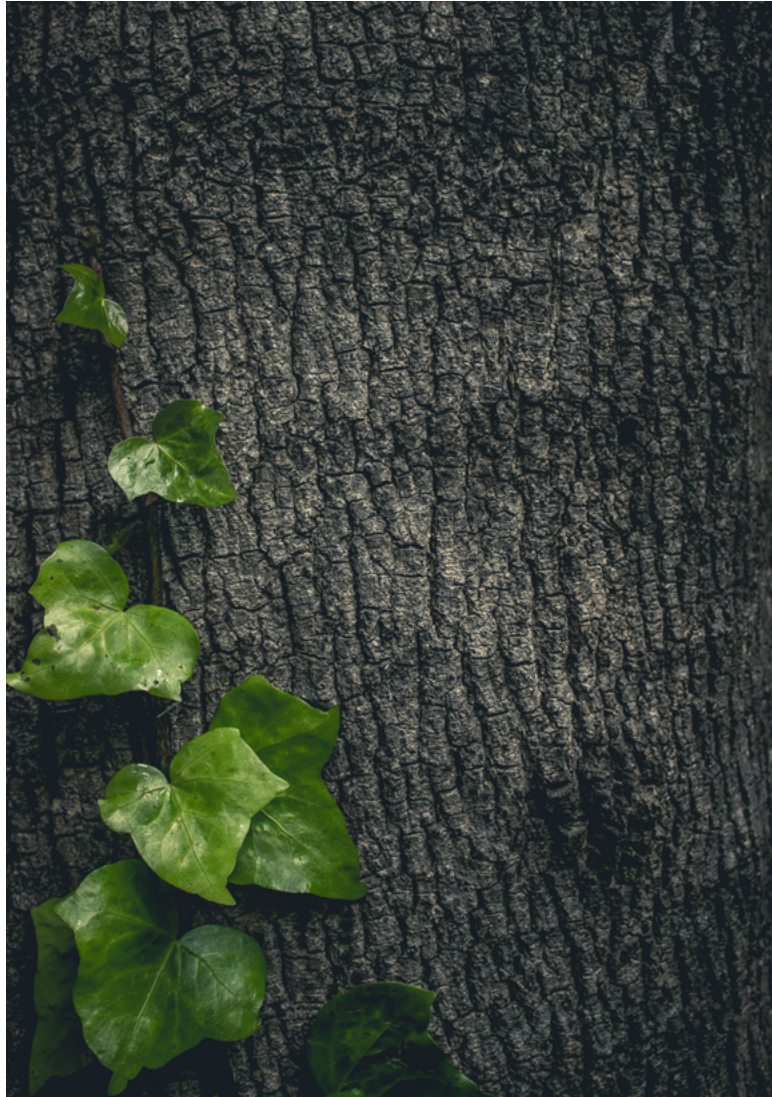

# ReGenerate

T108 ReGenerate is highly regarded for its practicality. From calm and neutral tones to much brighter and bolder colors, the flexibility in color options makes it easier to mix and match with the interior environment.











T10826 / T10834 **Brick**



T10807 / T10823 / T10825 / T10837 **Brick**





T10803 Brick



T10829 / T10838 Quarter-Turn









T10835 Brick



T10805 / T10822 Quarter-Turn





T10838 Yellow      T10826 Cloud      T10805 Smokey



T10829 Orange      T10834 Hazel Wood      T10806 Charcoal



T10821 Emerald      T10835 Iron      T10825 Silver



T10822 Ruby      T10817 Tawny      T10803 Ash



T10823 Denim      T10830 Porpoise



T10837 Aegean      T10807 Lead



Style	T108 "ReGenerate"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.0 / 4.5 / 3.0mm
Total Thickness	7.7mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4900g/m²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: <b>STAIN</b> SHIELD™
Soil Resistance	Soil Guard Treatment: <b>SOIL</b> GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).
U.S. CRI Green Label Plus Certificate.
Singapore Green Building Council Product Certificate - 4 Ticks "Leader".
Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)
Passes AATCC Static Propensity Test. Static Propensity: ≤ 2.0 KV (AATCC 134)
Passes the Quality Test of China National Carpet Quality Test Center.
Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.
ISO 9001 Quality Management System.
ISO 14001 Environmental Management System.
ISO 45001 Healthy & Safety Management System.





