



Eruption T628
Magma T818
Fissure T817

Volcanic Collection

TUNTEX™

Volcanic Collection

| T628 & T818 & T817
product insight

The Volcanic Collection channels the raw beauty and untamed power of the earth's most dramatic natural events. Inspired by the flowing magma, explosive eruptions, and deep fissures shaped by volcanic activity, each design captures a unique moment in nature's transformation. With dynamic lines, organic shapes, and rich, layered colors, the collection brings a sense of movement and energy to interior spaces.



T81718 / T81801 / T81802 Ashlar



T62804 / T62807 Ashlar



T62801 / T62803 / T81719 Random





T62801 / T81802 Random



T62801 / T62802 Brick





T81723 / T81724 / T81802 Ashlar



T81801 / T81802 Ashlar



T81718 / T81724 Ashlar



T81723 / T81724 / T81801 Ashlar





T62803 / T81718 Random



T62806 Ashlar





T62803 / T62804 Brick





T81716 / T81802 Ashlar



T81717 / T81718 / T81802 Ashlar



T81723 / T81724 Ashlar








T81711 / T81806 Ashlar




T81723 / T81803 / T81804 Ashlar




T81715 Ashlar

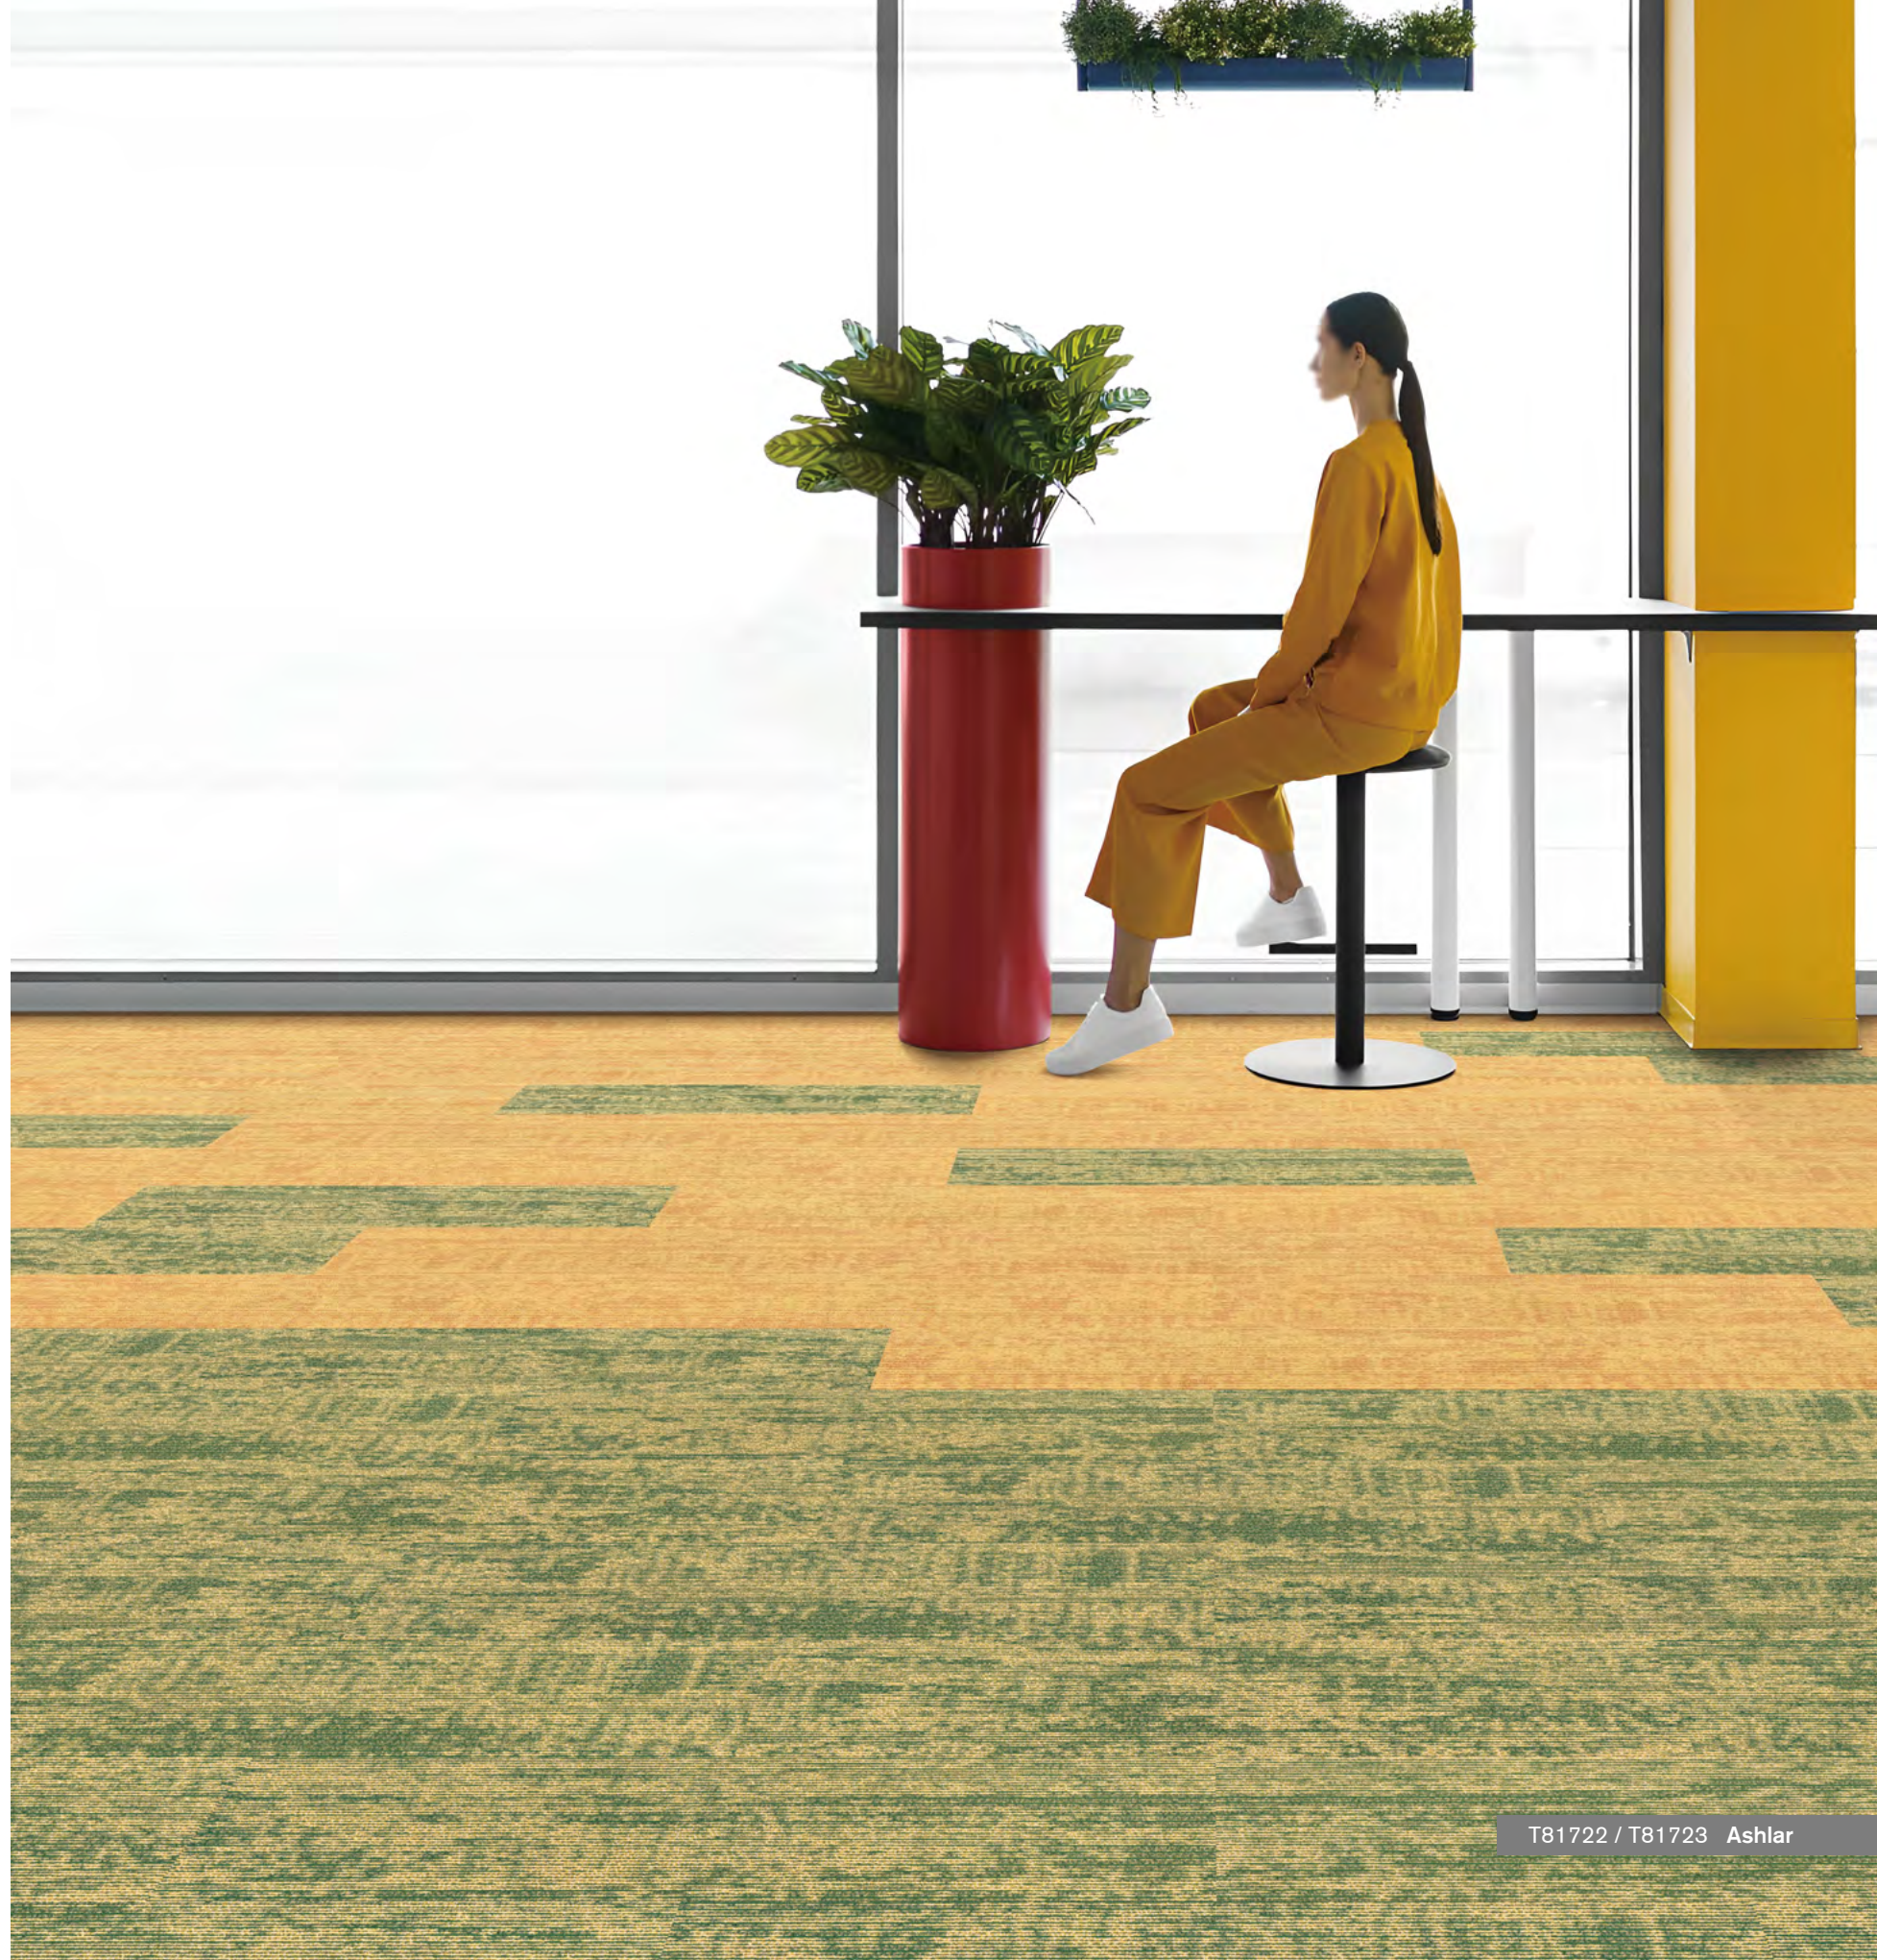

T81722 / T81723 Ashlar

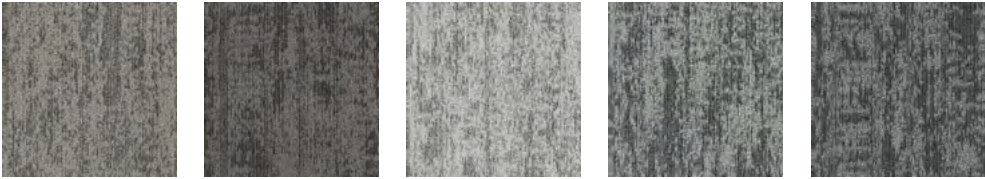


T62801 Peanut T62802 Brown T62803 Cloud T62804 Coin T62805 Iron

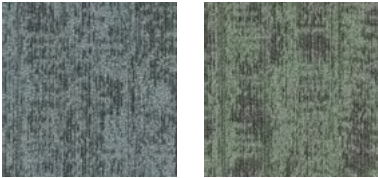


T62806 Aegean T62807 Moss



T81801 Peanut T81802 Brown T81803 Cloud T81804 Coin T81805 Iron T81806 Aegean T81807 Moss

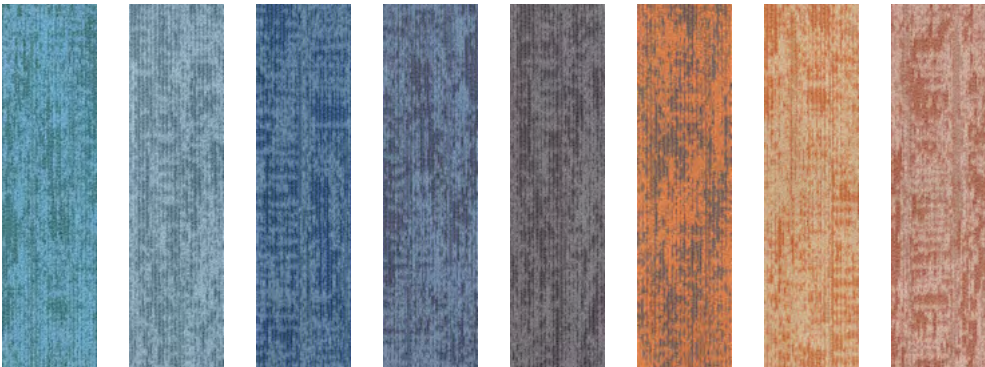

T81711 Sky T81712 Cerulean T81713 Navy T81714 Indigo T81715 Berry T81716 Yam T81717 Sandstone T81718 Rust

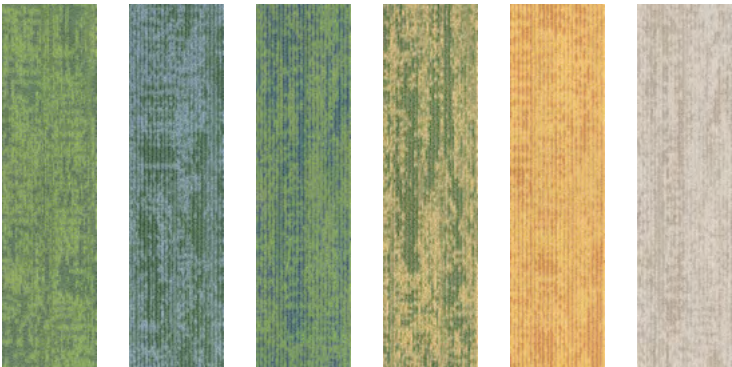

T81719 Moss T81720 Sage T81721 Pine T81722 Chartreuse T81723 Fire T81724 Tan



T62803 / T81712 / T81713 Brick

Style	T628 "Eruption" T818 "Magma" T817 "Fissure"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1 / 10G
Pile Height	5.7 / 3.5 / 3.0mm
Total Thickness	7.4mm(±0.5mm)
Tile size	T628 - 500mm x 500mm T817 & T818 - 250mm x 1000mm
Total Weight	T628 & T818 - Approx. 4900g/m ² T817 - Approx. 4950g/m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



