



TUNTEX™

Imprints

T879 Imprints captures the subtle beauty of a rain-kissed path, transforming it into a sophisticated design for commercial spaces. Its palette features warm beige and light gray as sun-drenched ground, while deep brown and charcoal "wheel tracks" meander across the surface in organic, varied lines.









T87906 Basketweave



T87907 Herringbone





T87905 / T87911 Random




T87907 / T87909 / T87910 Ashlar





T87903 / T87904 Ashlar

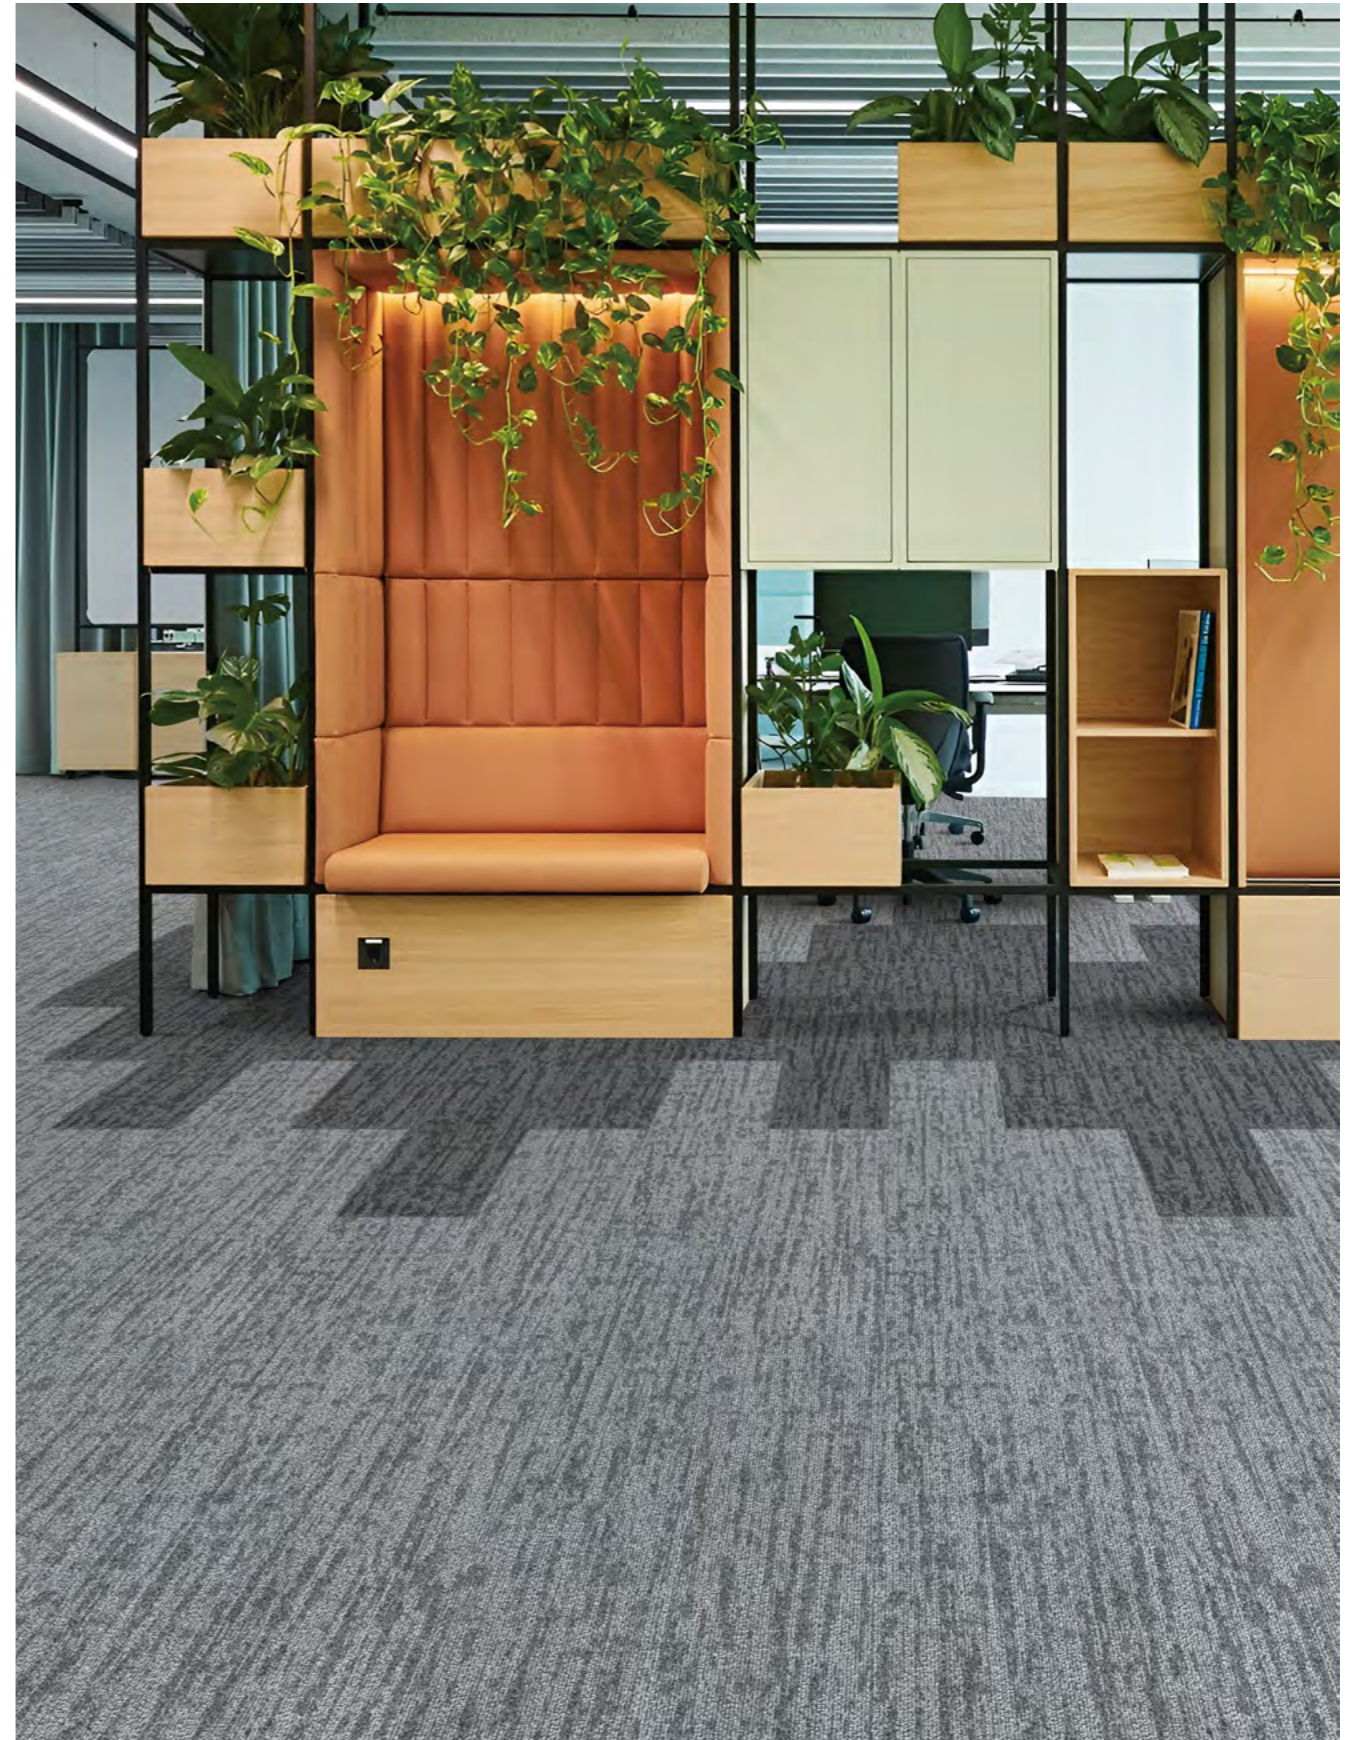

T87905 / T87906 Ashlar






T87909 Ashlar



T87910 Ashlar

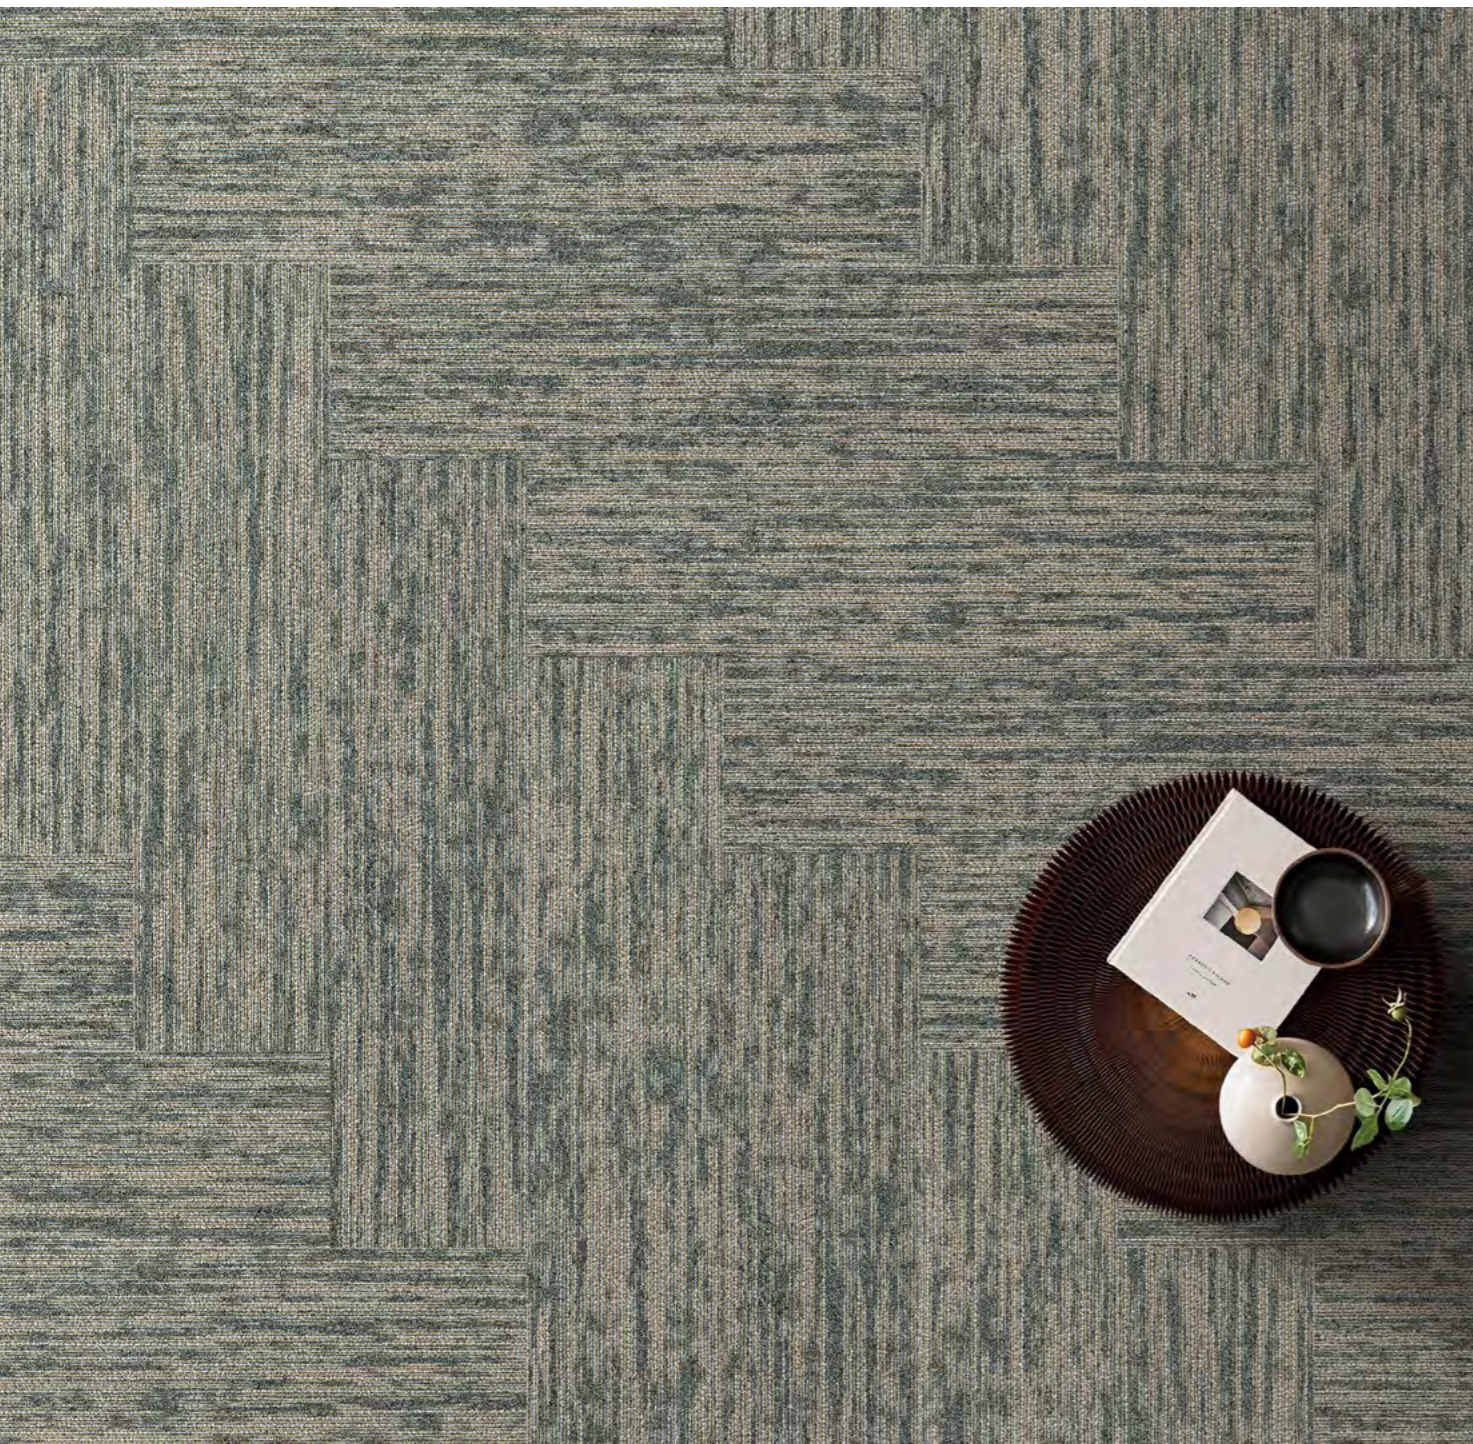

T87911 Herringbone



T87908 / T87911 Ashlar







T87911 Ashlar




T87901 Stone



T87902 Denim



T87903 Sage



T87904 Juniper




T87905 Coin



T87906 Shadow




T87907 Fossil



T87908 Iron



T87909 Rose



T87910 Rosewood



T87911 Flaxen

Style	T879 "Imprints"
Construction	Hi / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.0 / 3.0mm
Total Thickness	6.5mm(±0.5mm)
Tile size	250mm x 1000mm
Total Weight	Approx. 4900g/m²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



