



Ginkgo Flutter T903
Ginkgo Drift T905



Ginkgo Collection


TUNTEX™

Ginkgo Collection

T903 & T905
product insight

Ginkgo Collection transforms the ephemeral beauty of golden ginkgo leaves dancing in the wind into a rich narrative woven into commercial spaces. This collection spins the dialogue between ginkgo and wind into a tapestry of yarn and texture.

Starting with the elegant ginkgo leaf as its motif, T903 Ginkgo Flutter offers a lush, intricate pattern that's never chaotic, while T905 Ginkgo Drift provides a sparser, more breathable design. Used together, these two patterns infuse any space with an understated, poetic charm.

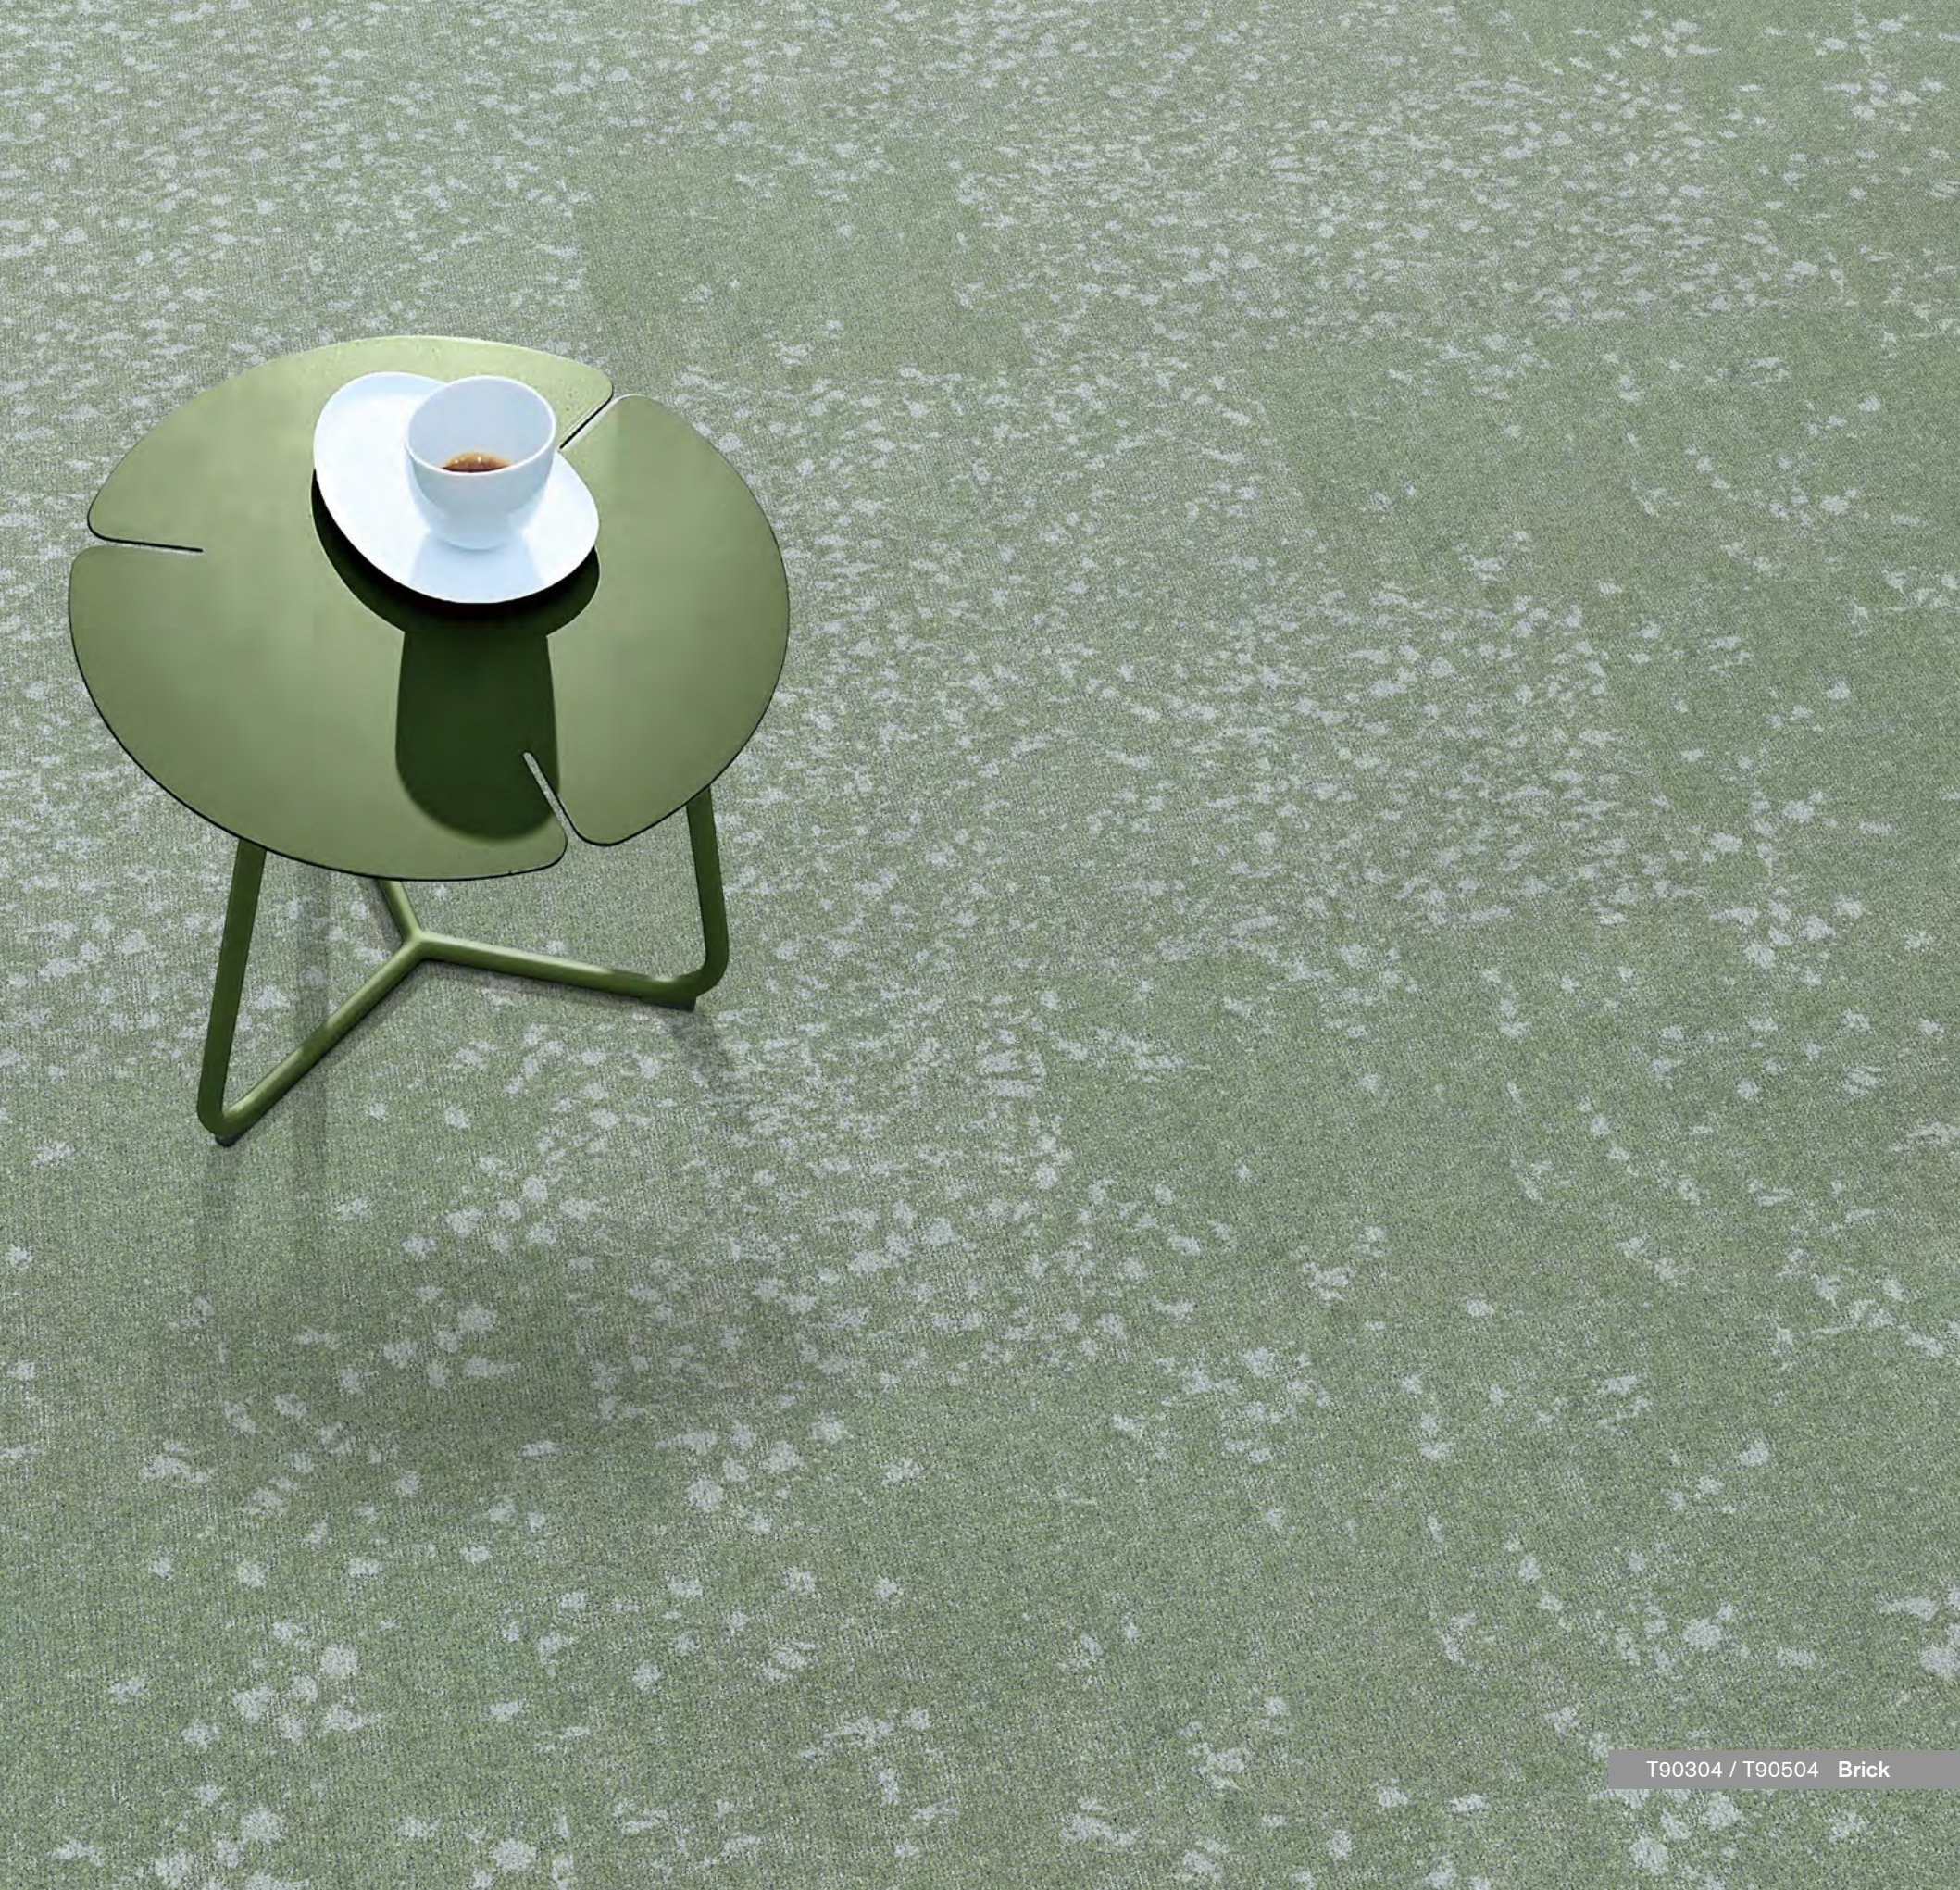







T90307 / T90507 Quarter-Turn



T90304 / T90503 Quarter-Turn



T90302 Brick




T90301 / T90302 / T90502 Brick





T90308 / T90506 Quarter-Turn

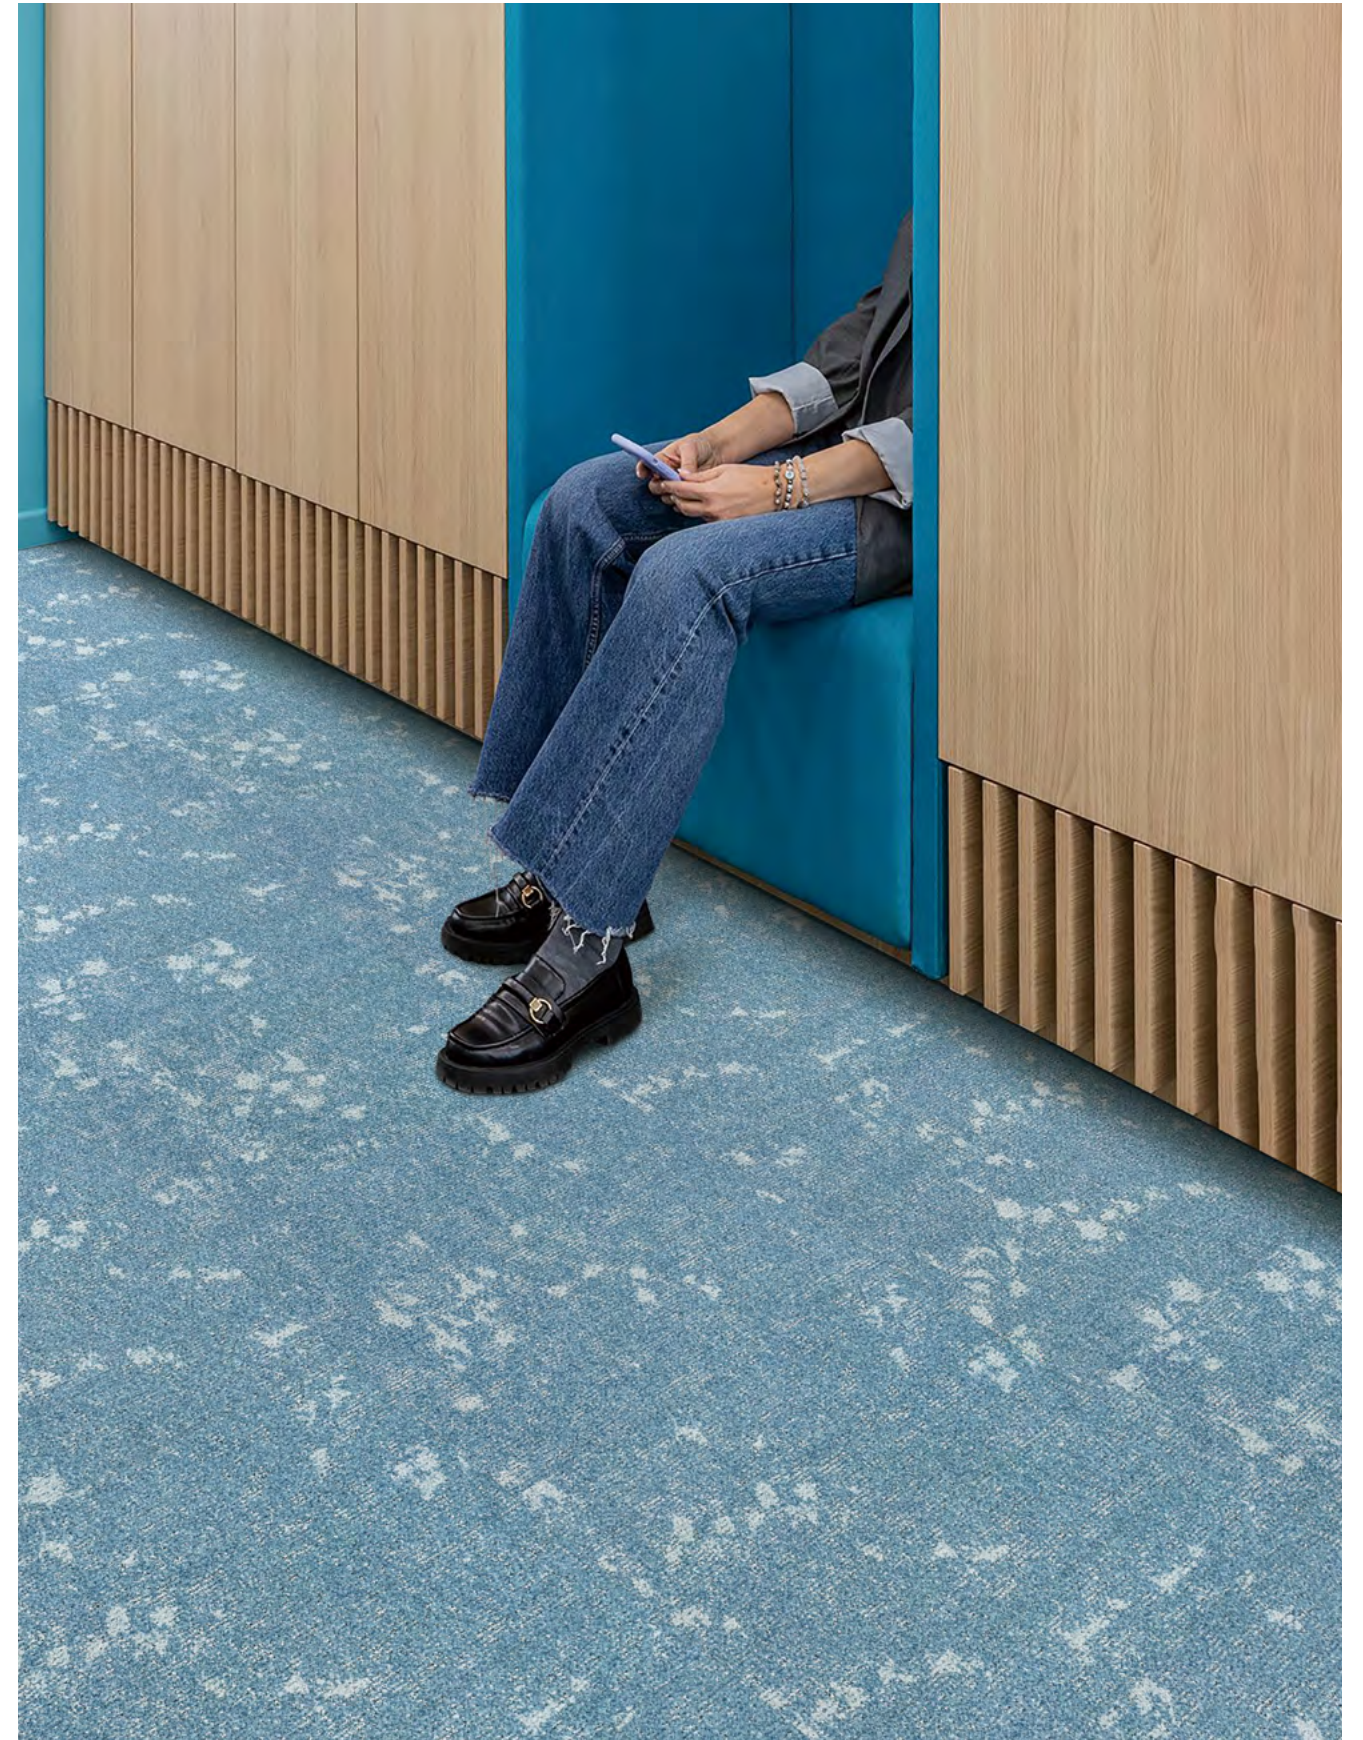


T90505 Brick






T90304 / T90307 / T90503 Brick




T90301 Fossil




T90501 Fossil




T90302 Smoke




T90502 Smoke




T90303 Coin




T90503 Coin




T90304 Sage




T90504 Sage




T90305 Cerulean




T90505 Cerulean




T90306 Anchor




T90506 Anchor




T90307 Ocean



T90507 Ocean



T90308 Aegean



T90508 Aegean

Style	T903 "Ginkgo Flutter" T905 "Ginkgo Drift"
Construction	High Cut Low Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1 / 10G
Pile Height	8.5 / 5.0mm
Total Thickness	11.0mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 5200g/m²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



