



**Drizzle** T825

**Colorfall** T826

**Afterglow** T829

# After-Rain Collection

**TUNTEX™**

# After-Rain Collection

T825 & T826 & T829  
product insight

After-Rain Collection captures the atmospheric clarity of post-rain light. By pairing a palette of balanced neutrals with muted warms, this collection introduces a rhythmic color logic to the interior landscape. Three distinct styles are engineered for functional versatility across open, transitional, and private zones, providing seamless spatial navigation through a unified aesthetic language.



T82623 / T82923 Ashlar



T82614 / T82921 / T82924 Ashlar



T82521 / T82612 / T82922 / T82932 Ashlar



T82923 Herringbone



T82914 Ashlar




T82914 Brick



T82914 / T82924 Ashlar



T82913 / T82923 Ashlar

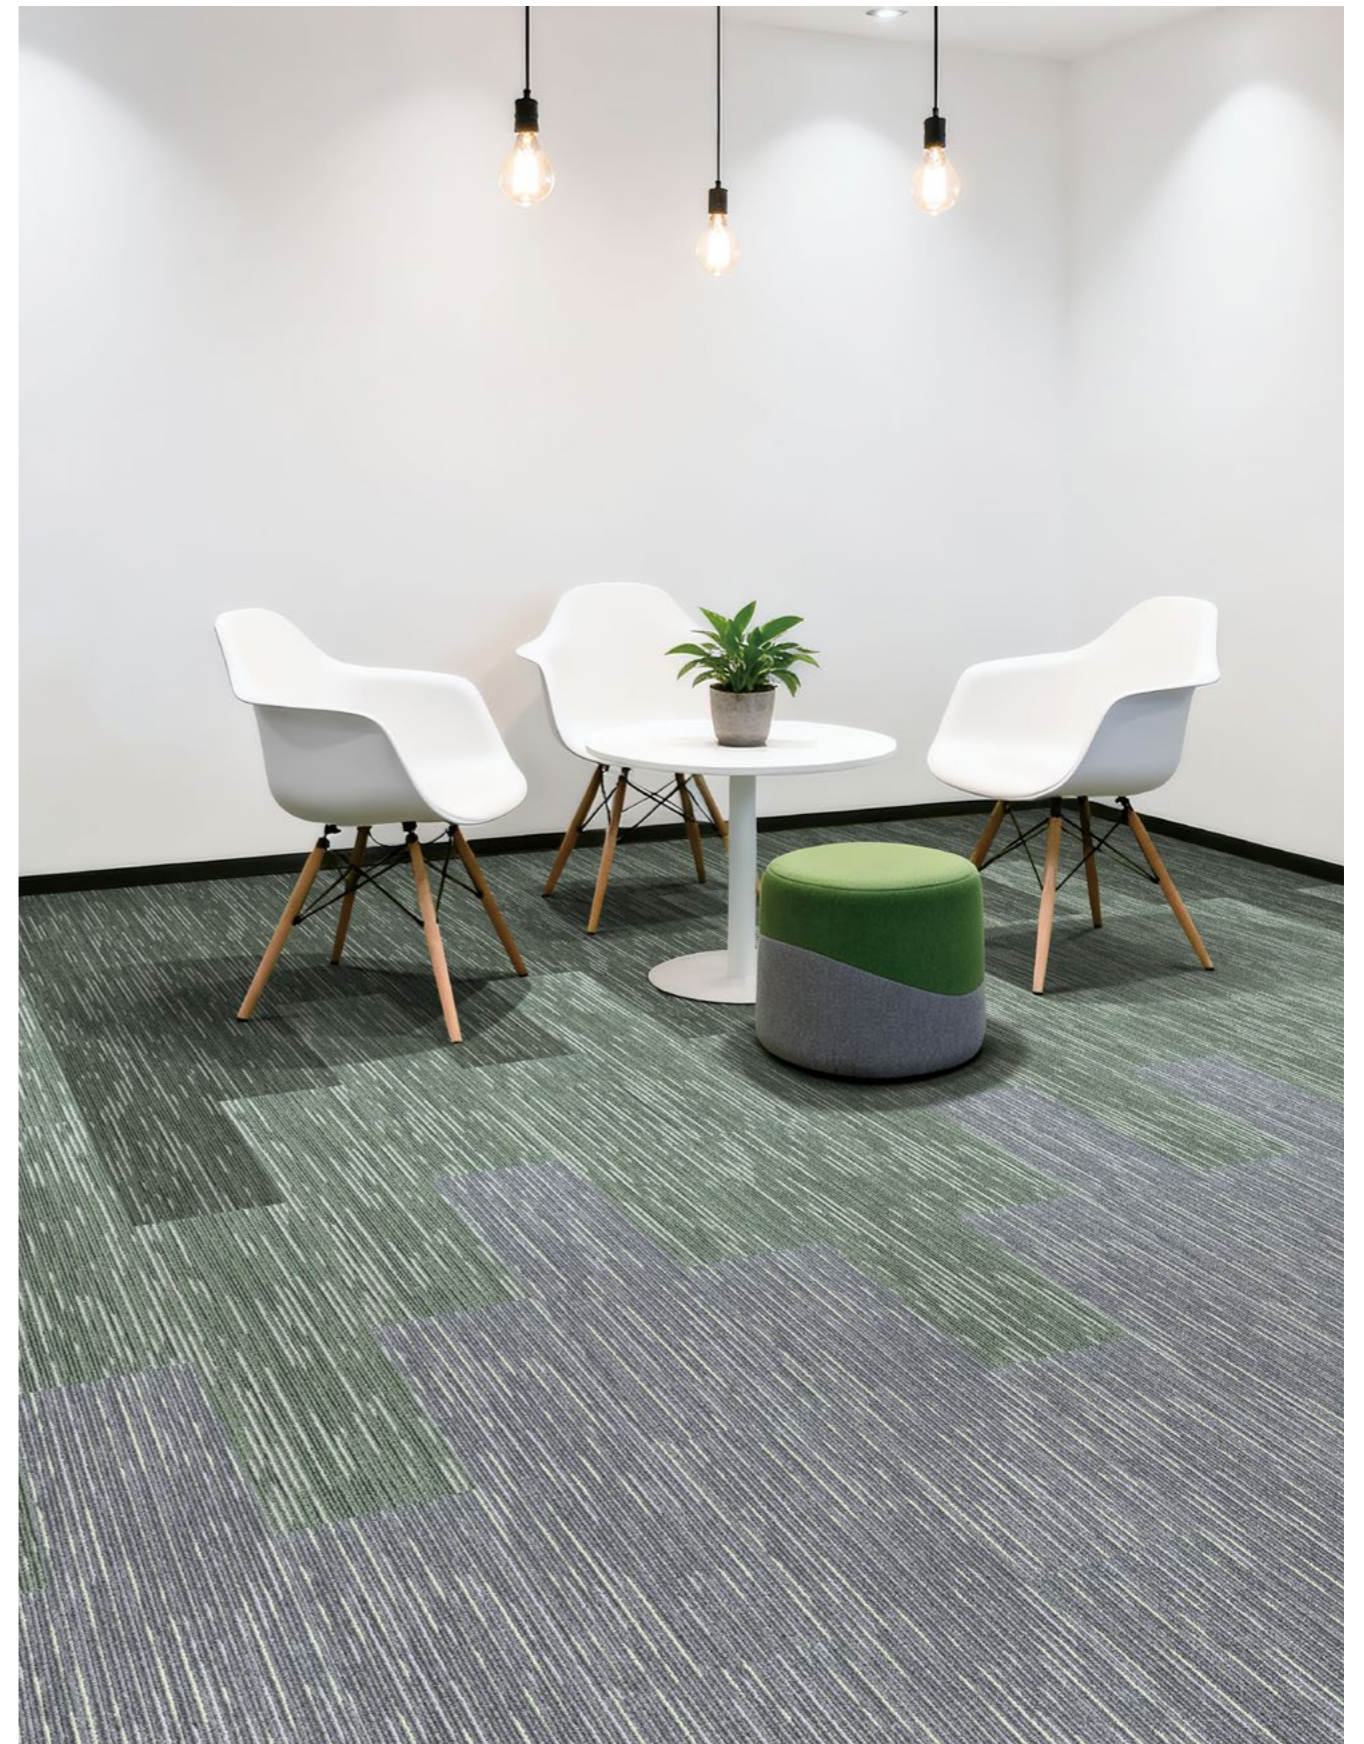


T82511 / T82623 / T82633 Ashlar



T82521 / T82611 Ashlar



T82614 / T82624 / T82634 Ashlar

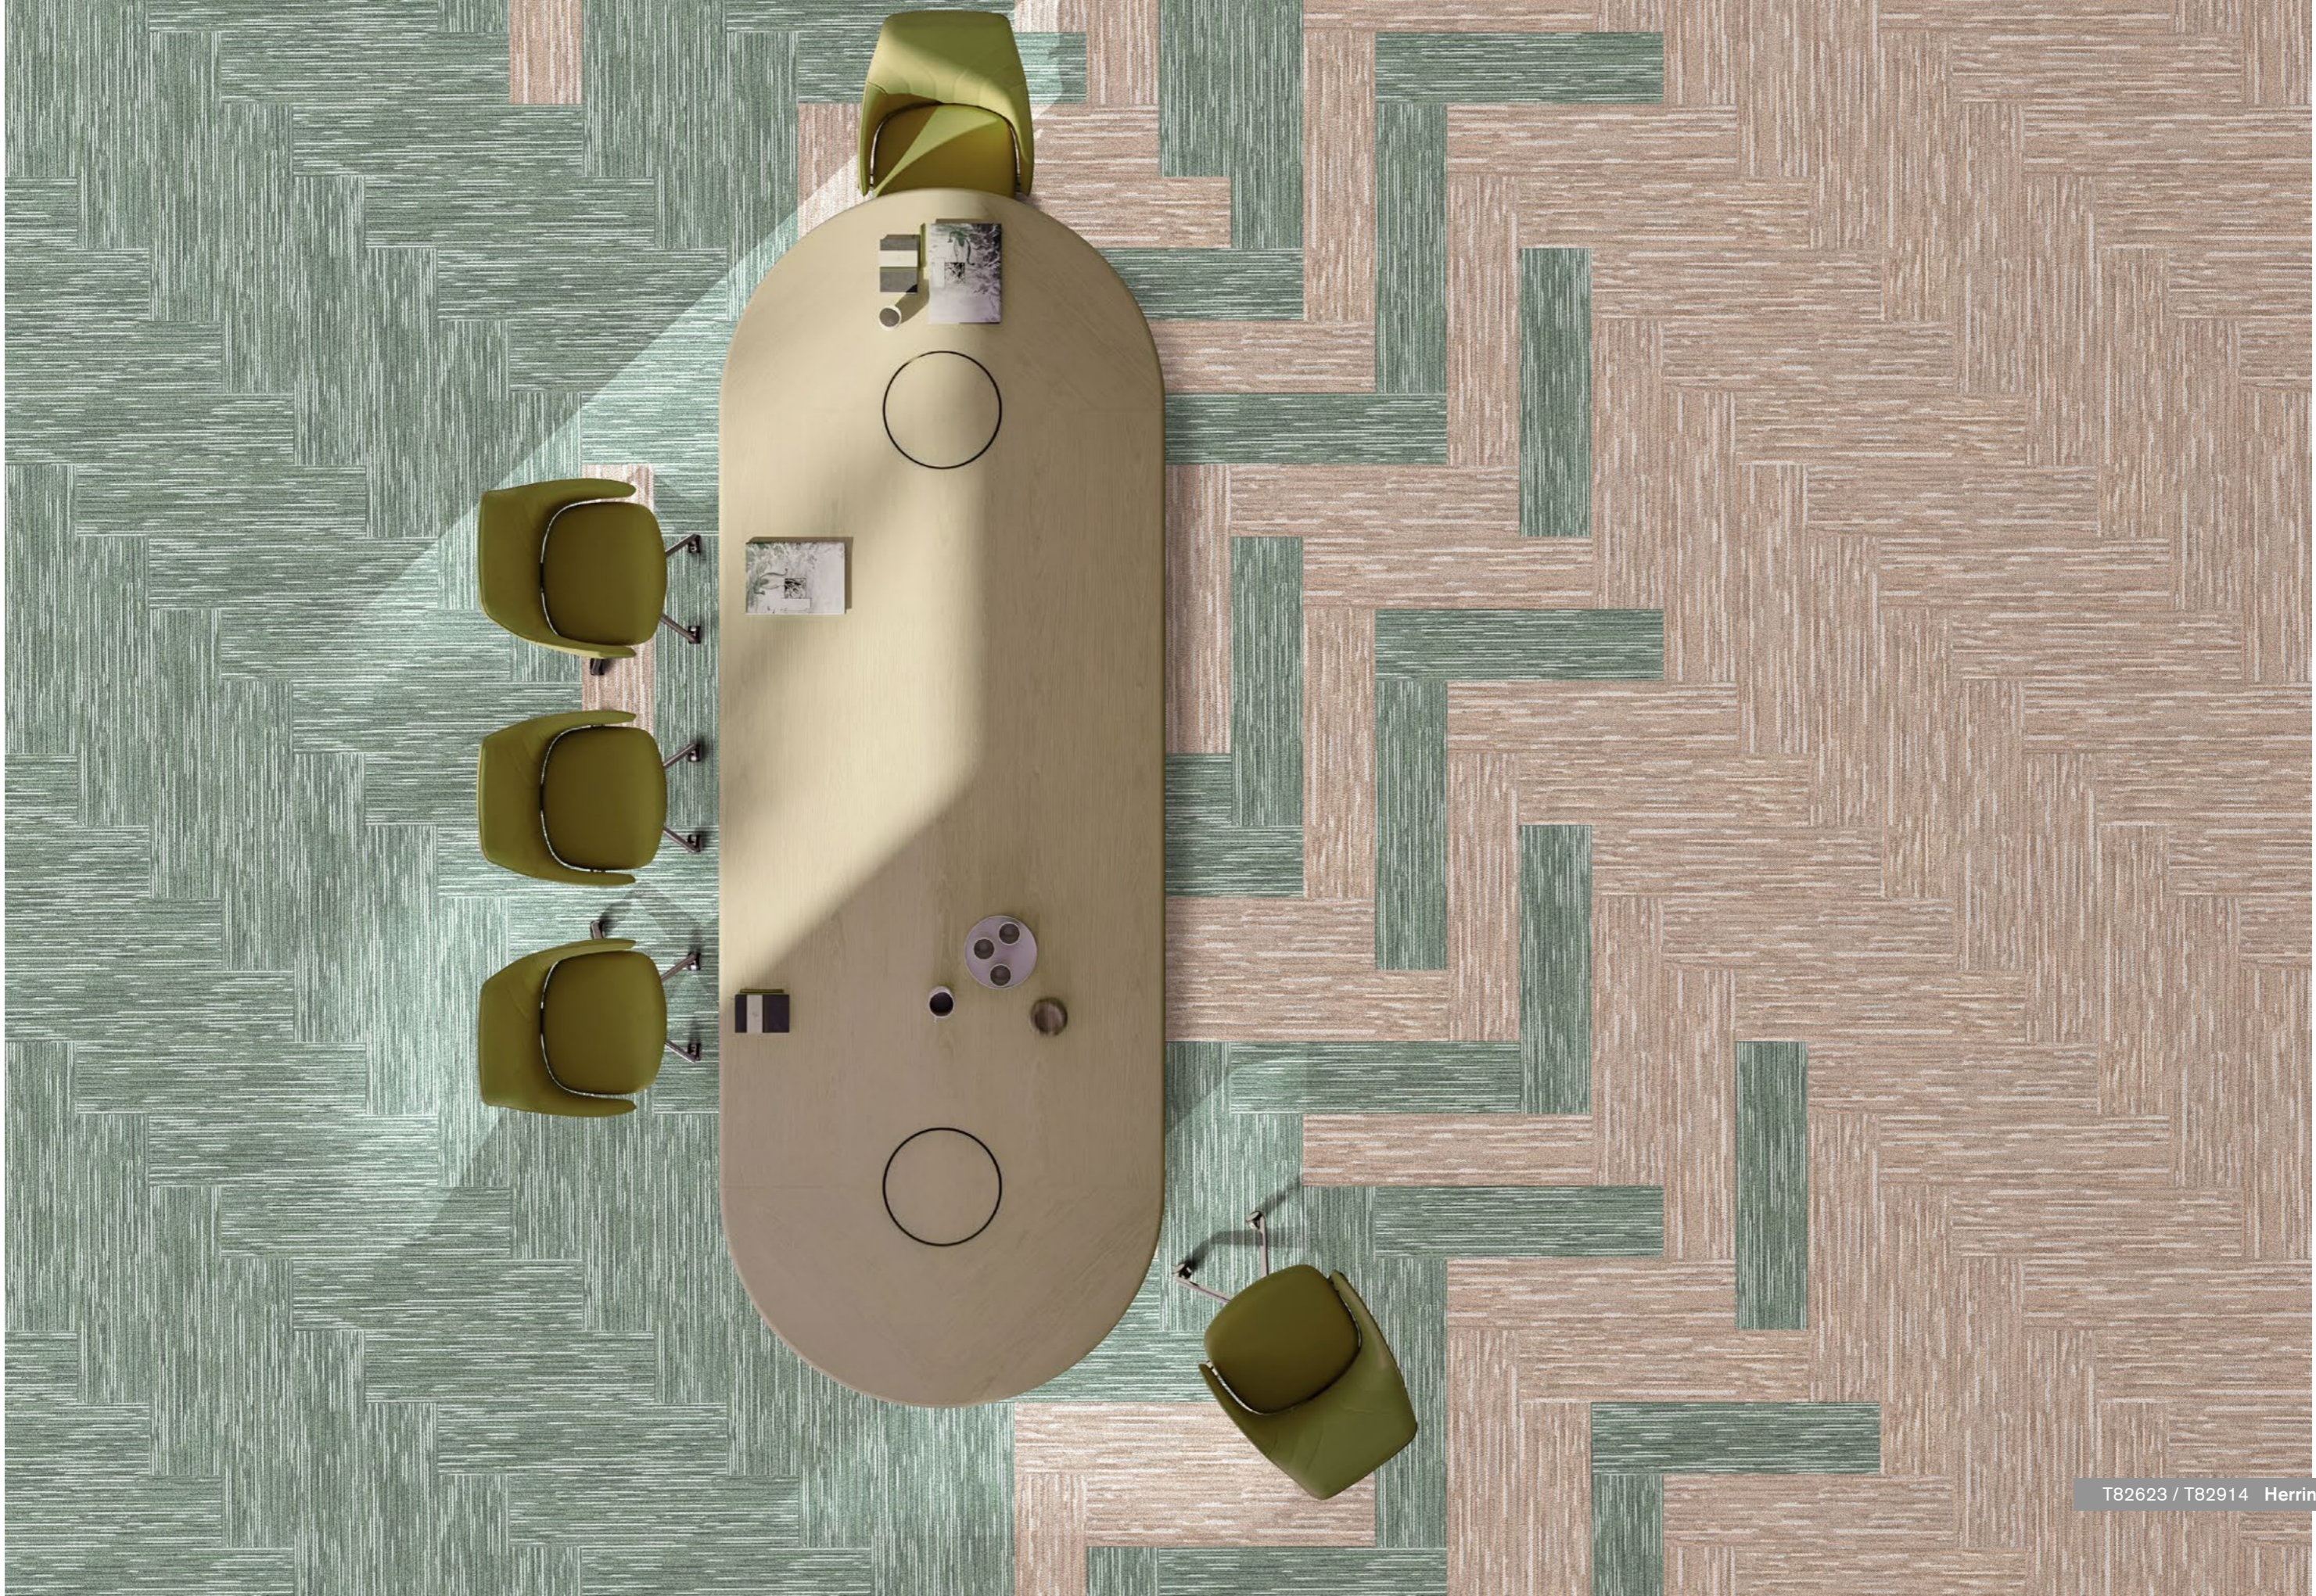



T82624 / T82903 / T82924 Ashlar



T82631 Ashlar



T82914 Ashlar



T82520 / T82614 Ashlar





<b>Style</b>	T825 "Drizzle" T826 "Colorfall" T829 "Afterglow"
<b>Construction</b>	Hi / Mid / Lo Loop
<b>Pile Fibre</b>	T825 - nexlon™ Premium Solution Dyed Nylon featured with quartz. T826 / T829 - nexlon™ Premium Solution Dyed Nylon featured with quartz and aircell.
<b>Dye Method</b>	Solution Dyed
<b>Gauge</b>	T825 / T826 - 1/12 G T829 - 1/10 G
<b>Pile Height</b>	T825 - 5.5/4.5/3.0 mm T826 - 7.0/5.0/3.0 mm T829 - 8.0/5.0/3.5 mm
<b>Total Thickness</b>	T825 - 7.0 mm (±0.5 mm) T826 - 7.8 mm (±0.5 mm) T829 - 8.2 mm (±0.5 mm)
<b>Tile size</b>	250 mm × 1000 mm
<b>Total Weight</b>	T825 - Approx. 4950 g/m <sup>2</sup> T826 / T829 - Approx. 5000 g/m <sup>2</sup>
<b>Secondary Back</b>	TUNTEX Duraback
<b>Stain Resistance</b>	Stainshield Treatment: <b>STAIN</b> SHIELD™
<b>Soil Resistance</b>	Soil Guard Treatment: <b>SOIL</b> GUARD™
<b>Wear Warranty</b>	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
<b>Colour Fastness</b>	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
<b>Static Electricity</b>	Permanent Lifetime Protection - less than 2.0 kV.
<b>Dimensional Stability</b>	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
<b>Installation</b>	Tackifier or Releasable adhesive Recommended.
<b>Sustainability</b>	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.  
Flammability: Passes (ASTM E648)  
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.  
Static Propensity: ≤ 2.0 kV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



T82933 Ashlar

