A dramatic volcanic landscape. In the foreground, a bright orange and red lava flow flows over dark, jagged, and cracked volcanic rock. In the background, a dark sea stack rises from the ocean, with white waves crashing against its base. The sky is overcast with grey clouds. A blue rectangular box in the top left corner contains white text and a grid of squares.

Eruption T628
Magma T818
Fissure T817

Volcanic Collection

TUNTEX™

Volcanic Collection

T628 & T818 & T817
product insight

The Volcanic Collection channels the raw beauty and untamed power of the earth's most dramatic natural events. Inspired by the flowing magma, explosive eruptions, and deep fissures shaped by volcanic activity, each design captures a unique moment in nature's transformation. With dynamic lines, organic shapes, and rich, layered colors, the collection brings a sense of movement and energy to interior spaces.







T81723 / T81724 Ashlar



T81718 / T81724 Herringbone





T62803 / T81718 Random



T62806 Ashlar



T81716 / T81802 Ashlar



T81717 / T81718 / T81802 Ashlar



T81723 / T81724 Ashlar



T81723 / T81803 / T81804 Ashlar



T81723 / T81724 / T81801 Ashlar





T62804 / T62807 Ashlar



T62801 / T62803 / T81719 Random







T62801 / T81802 Random



T62801 / T62802 Brick



T81723 / T81724 / T81802 Ashlar



T81801 / T81802 Ashlar





T81713 / T81714 / T81804 Ashlar



T81712 / T81804 / T81805 Ashlar



T81711 / T81806 Ashlar



T81723 / T81803 / T81804 Ashlar



T62803 / T81713 Brick



T62803 / T62804 Brick



T62803 / T62804 Brick



T81713 Ashlar










T81715 Ashlar



T81803 / T81804 / T81805 Ashlar

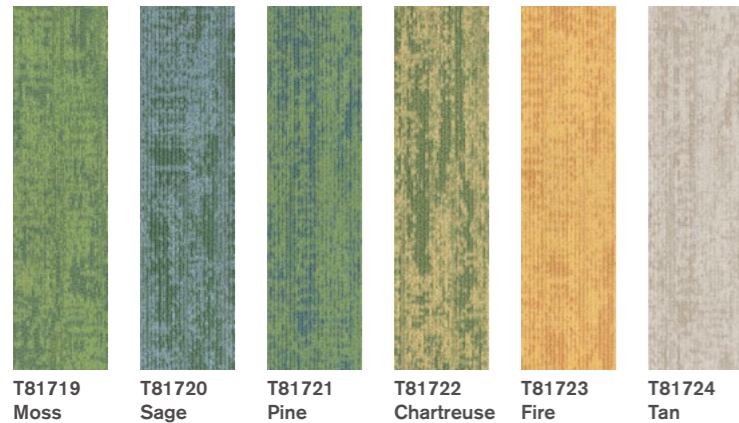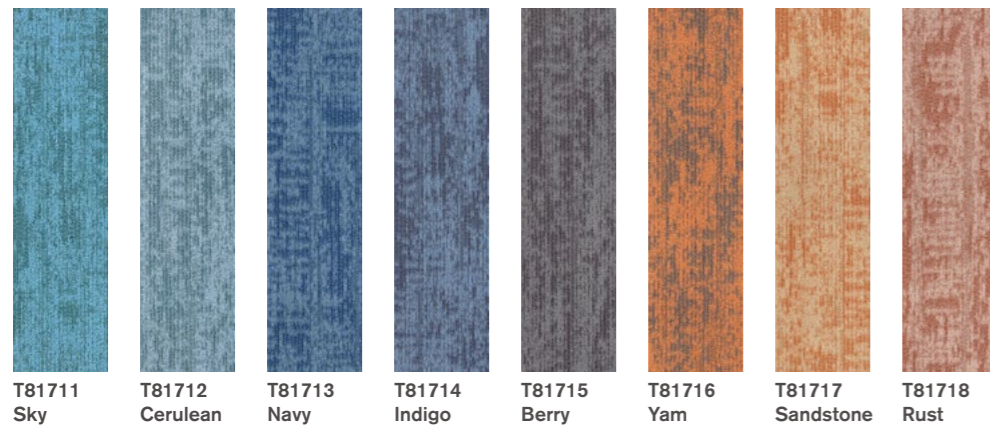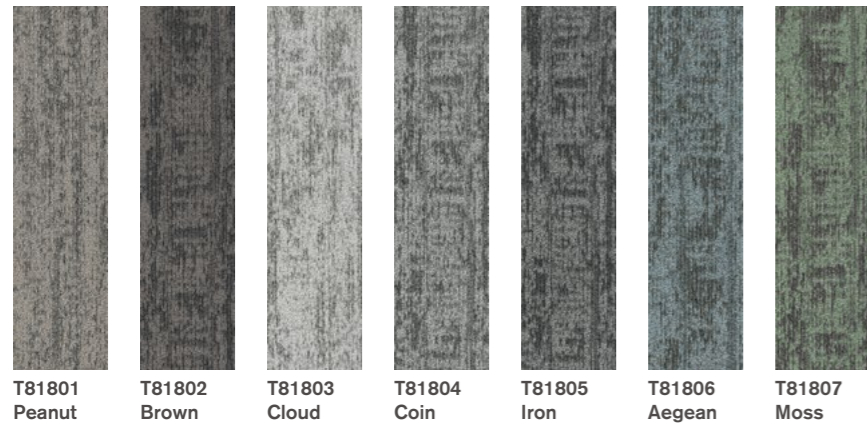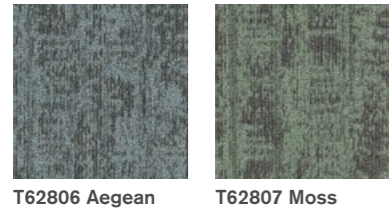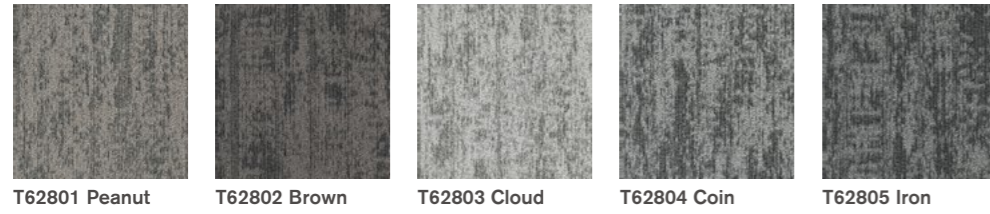

Style	T628 "Eruption" T818 "Magma" T817 "Fissure"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Premium Solution Dyed Nylon featured with aircell
Dye Method	Solution Dyed
Gauge	1/10 G
Pile Height	5.7/3.5/3.0 mm
Total Thickness	7.4 mm (±0.5 mm)
Tile size	T628 - 500 mm x 500 mm T817 & T818 - 250 mm x 1000 mm
Total Weight	T628 & T818 - Approx. 4900 g/m ² T817 - Approx. 4950 g/m ²
Secondary Back	TUNTEX Duraback
Stain Resistance	Stainshield Treatment: STAIN SHIELD™
Soil Resistance	Soil Guard Treatment: SOIL GUARD™

Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD).

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test.
Flammability: Passes (ASTM E648)
Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test.
Static Propensity: ≤ 2.0 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.



T62803 / T81712 / T81713 Brick

